

Fiat Ducato F96 - tyre pressure monitoring system warning lamp on

Data sheet	
Manufacturer	Fiat
Vehicle model	Ducato (F96)
Engine	2.3 litre diesel
Year of manufacture	2019-
Symptoms	Warning lamp for tyre pressure monitoring system lights up

Important safety note

TPMS warning lamp lights up, error code C1010, C1012, C1014, C1015


If the TPMS warning lamp lights up on the above-mentioned vehicle and the error code C1010/ C1012/C1014/C1015 (TPMS system) is stored in the control unit, a software update can provide a remedy.

However, all components, fuses and the power supply that could also be the cause should first be checked.

A software update can be carried out, for example, using Hella Gutmann macsRemote Services or by means of a pass-through-compatible diagnostic device taken from the mega macs series. Furthermore, registered access to the vehicle manufacturer's online portal is required. If the appropriate equipment is not available, please contact an authorised specialist workshop.

Important

Please always observe in such cases the maintenance and repair notes provided by the vehicle manufacturer.

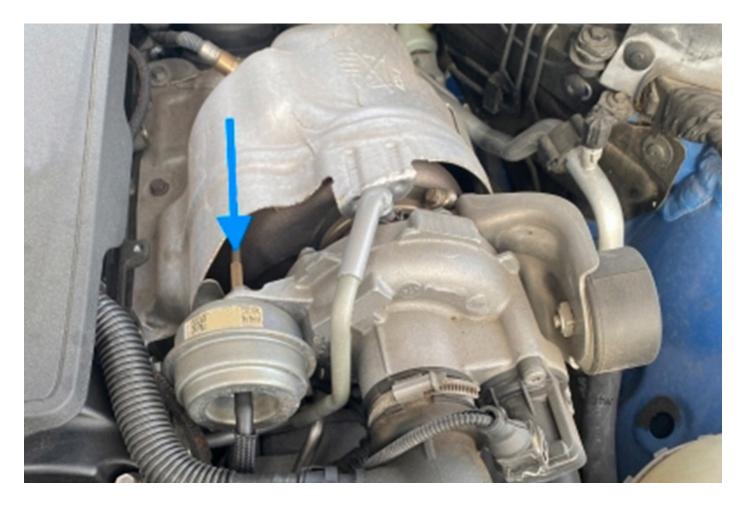

Reprinting, distribution, reproduction, exploitation in any form or disclosure of the contents of this document, even in part, is prohibited without our express, written approval; indication of the document source is also required. The schematic illustrations, pictures and descriptions serve only for the purposes of explanation and representation of the instructions and cannot be used as a basis for installation or assembly work. All rights reserved.