



## BRIEF INFORMATION

### WHITE BEACON DOUBLE FLASH

- LED beacon in classic tall trapezoidal design with clear lens
- Generates a high warning effect with all-round visibility due to its tall design
- With double flashing white signal function
- Classic clear dome

### PRODUCT FEATURES

With its classic trapezoidal design, the White Beacon Double Flash warning beacon from HELLA VALUE FIT provides a brilliant white light that stands out. Whether it's construction sites, utility vehicles, or emergency services, this beacon delivers unparalleled visibility, ensuring safety and visibility at all times. Its height of 4.88" (124 mm) generates a white warning signal from afar. By virtue of its height, it is prominently visible despite being placed behind auxiliary lights on a roof bar.


Engineered for endurance, the VF White Beacon is constructed to endure the harshest conditions. Its sturdy build and cutting-edge LED technology guarantee sustained performance, making it the ideal choice for professionals who demand nothing less than excellence.

The product is certified to meet the stringent standards of SAE J845, Class 1, and offers electromagnetic compatibility in line with ECE R10 SAE, Class 1, ensuring its reliability and adherence to industry regulations.

The beacon has a stable and robust plastic housing. At the same time, the high-impact resistant polycarbonate lens with texture provides a clear version with a professional look and renders better optical clarity.



The internal structure of the reflectors enables a homogeneous light output across the entire height of the lens with its 24 LED modules. The beacon includes protection: IP69K, IP67, electromagnetic compatibility, polarity reversal protection, and over-voltage protection.

# TECHNICAL DETAILS




Technical Data	
Color	White
Voltage	10 - 30 VDC
Flash Pattern	Two pulses in one flash (0.8 - 2Hz)
Approval	SAE J845 Class 1, ECE R10, ROHS
Lens	Clear, impact resistant polycarbonate
Power Consumption	24 Watt
Housing Material	Plastic
Mounting	Screw
Connection	11.41" (290mm) cable with open wires
Synchronization	Up to 8 units
Scope of Delivery	Warning beacon and mounting instructions.
Operating Temperature	-40°C / +60°C

## Dimensional sketch

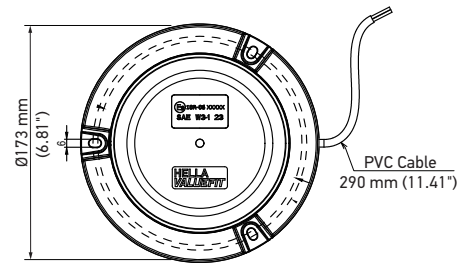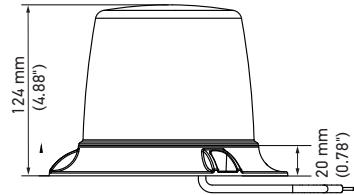

# RANGE OVERVIEW

Description	Light Source	Part Number	Product Image
HELLA Value Fit White Beacon Double Flash	24 LED's	<b>357981001</b>	

Product features, specifications and availability are subject to change without notice.

# APPLICATION EXAMPLE

