



BULBS

CATALOG 2024-2025



www.hella.com/bulbs

Content



Introduction

HELLA the lighting expert 04

HELLA-tested quality 06

Light explained 08

BULBS FOR PASSENGER CARS AND COMMERCIAL VEHICLES

HELLA Bulbs Summary 18

LED Retrofit - Fog light and headlight 22

LED Retrofit - Miniature 26

Halogen Bulbs Product Range 28

Halogen Bulbs Summary 32

Xenon - High Intensity Discharge Bulbs 54



HELLA Halogen Special Bulbs

| | |
|---------------------------|----|
| Standard Halogen 12 V | 58 |
| Standard Miniature 12 V | 59 |
| Standard Halogen 24 V | 50 |
| Long Life | 61 |
| +50 | 63 |
| High Wattage | 64 |
| Heavy Duty | 65 |
| Optilux Extreme Yellow XY | 66 |
| Optilux Extreme White XB | 67 |

Motorcycle Bulbs

| | |
|--------------------------------|----|
| Motorcycle Bulbs Summary | 68 |
| LED Retrofit - For Motorcycles | 74 |

Others

| | |
|---------------------|----|
| HELLA Bulb Displays | 78 |
| Bulb Bases | 79 |
| Digital Services | 84 |

HELLA - the lighting expert


Our experience
for your success



125 years
of innovation




First-class
lighting design

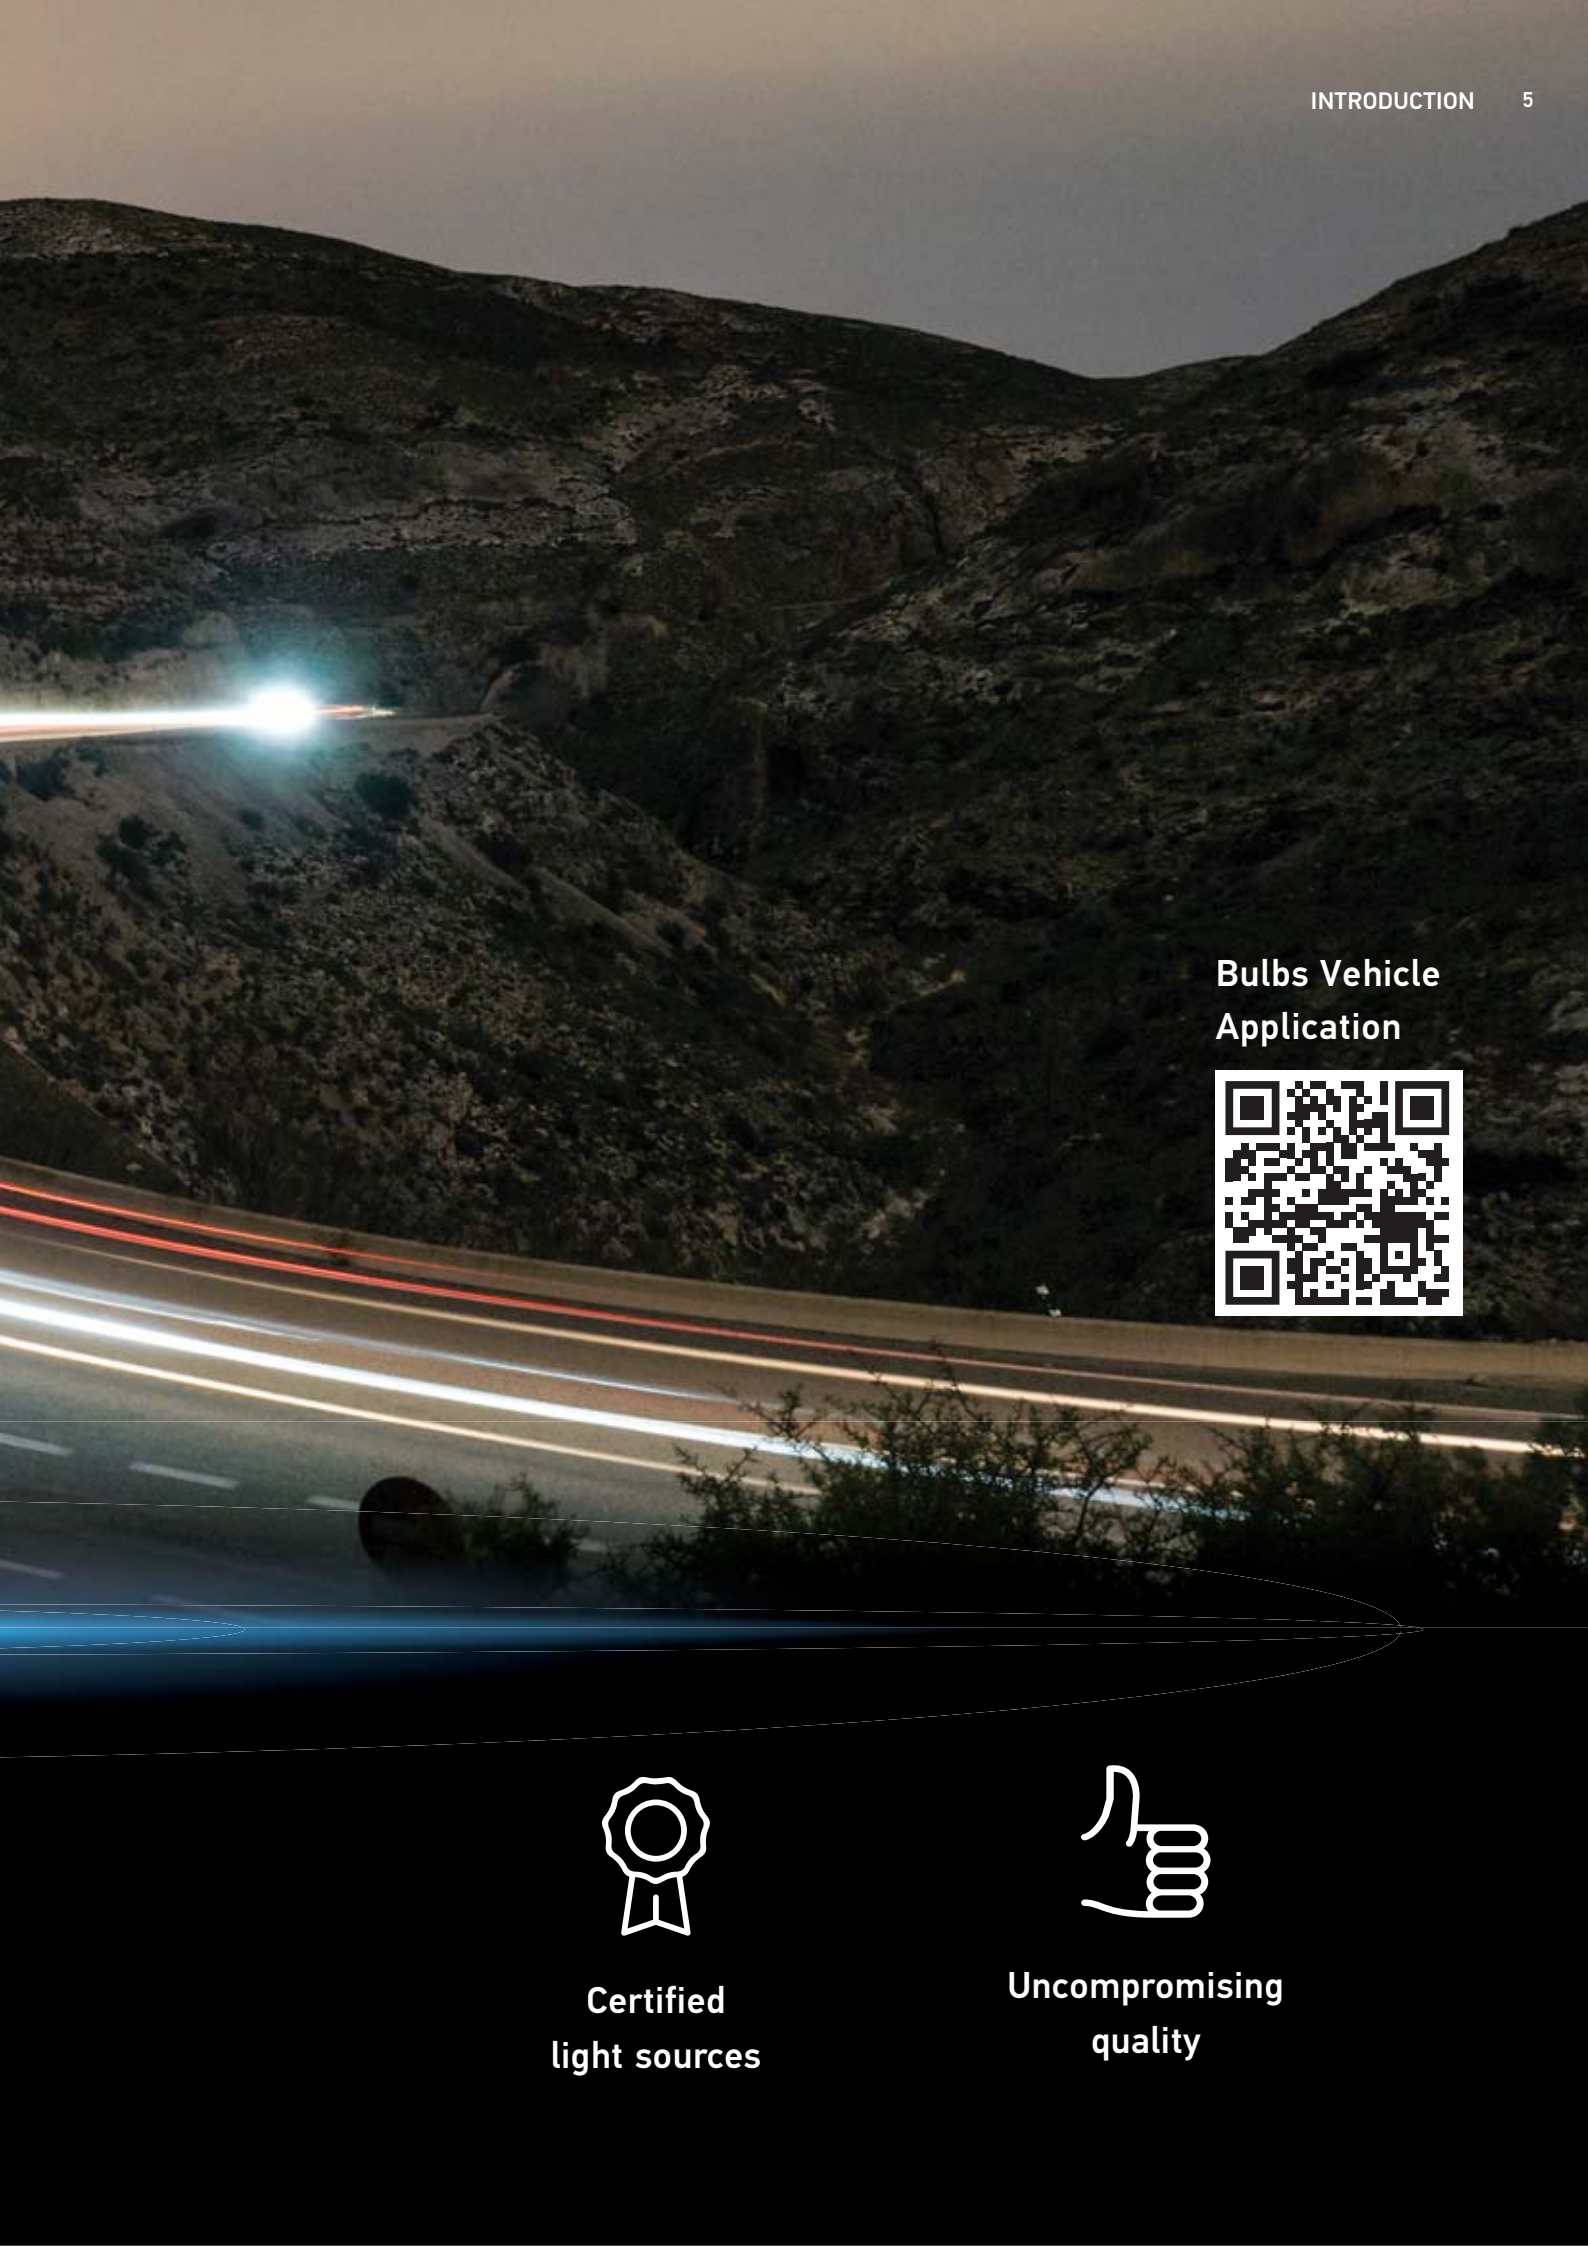

**Bulbs Vehicle
Application**



**Certified
light sources**



**Uncompromising
quality**



HELLA

THE LIGHTING EXPERT

OUR EXPERIENCE FOR YOUR SUCCESS



**125 YEARS
OF INNOVATION**

**BEST IN CLASS IN
LIGHTING DESIGN**



**QUALITY WITHOUT
COMPROMISE**

**CERTIFIED LIGHT
SOURCES**



**VEHICLE SPECIFIC
LIGHTING
ELECTRONICS**

HELLA-tested quality

Lippstadt light channel



Geometric measurement

The filament geometry is tested in a measuring projector – in relation to the legal standards according to IEC 60810. The size of the filament and its positioning in the bulb must comply with the provisions of the standard. This is the only way to achieve optimum performance of the lamps and prevent dazzling oncoming traffic.



Vibration and shock test

In this test, the vibration resistance of the bulb and especially of the filament is tested on an electrodynamic vibration test rig.



Lifetime test

In extensive tests, the high reliability of HELLA bulbs is proven over a long period of time.

Europe's longest light tunnel is based at HELLA in Lippstadt, Germany. With a length of 140 metres, the light channel is a unique place to carry out extensive and complex light tests.



Paint adhesion test

In a climate chamber, the adhesion of the lacquer coating of colour lacquered glass bulbs – such as the PY21W – is tested at different temperatures and humidity levels.

The optimal adhesion of the glass bulb coating ensures the required amber direction indicator light over the entire service life.

Luminous flux measurement

The luminous flux and luminous intensities of HELLA bulbs are determined in the integrating sphere and with the goniometer. This ensures the optimum luminous efficacy of the bulbs.

Compliance with world-leading standards



Light explained

The human eye

Discomfort & anxiety

We drive at night because we HAVE to.
But are we well equipped for it?



No glare



Simulated glare

Light & speed

Did you know? Speed leads to a reduction in the field of vision.



Field of vision: 100°




Field of vision: 75°



Field of vision: 45°




Field of vision: 30°

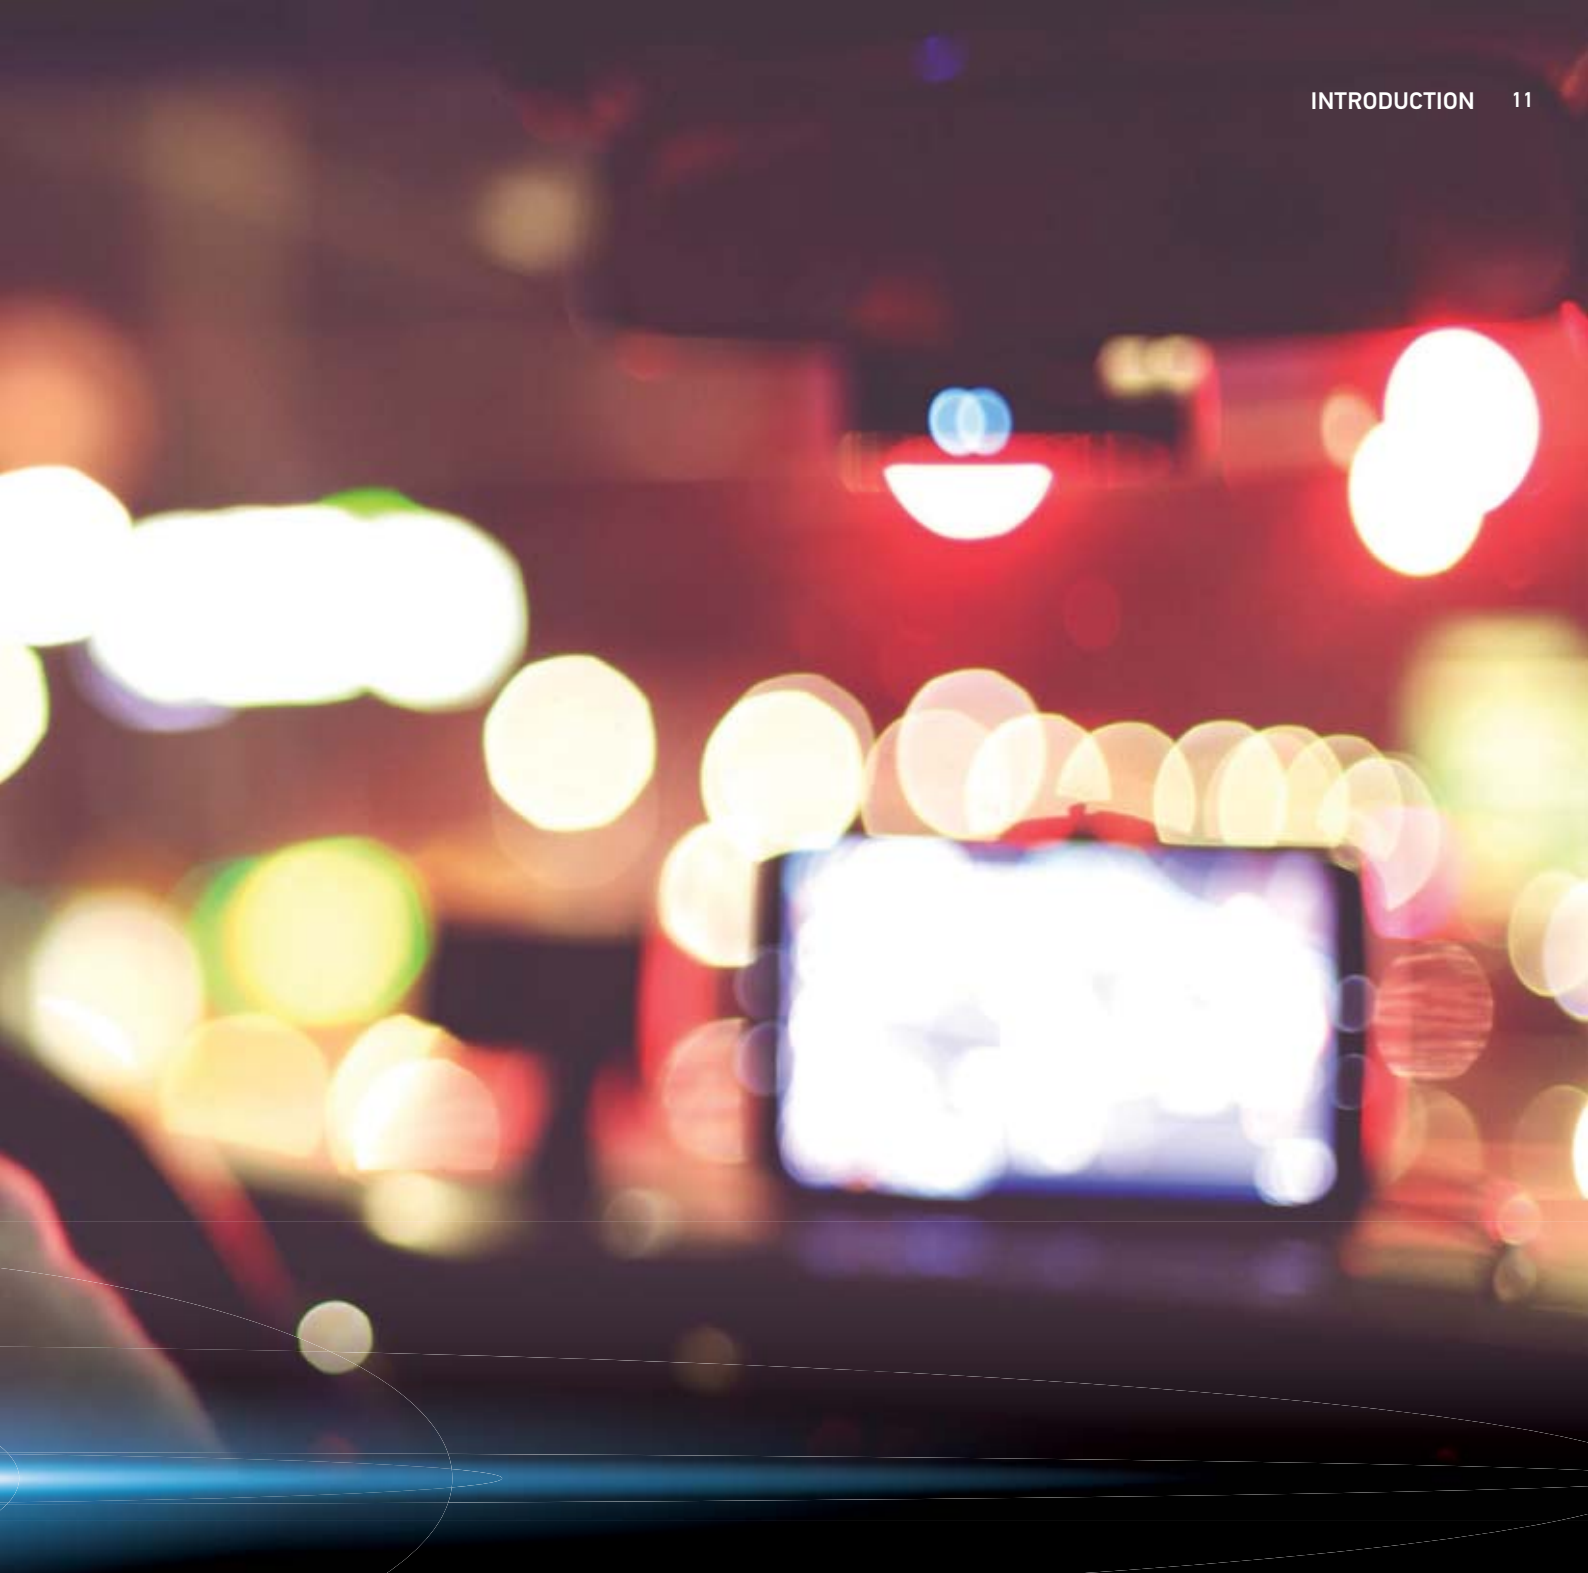


Light & age


The field of vision decreases with age.

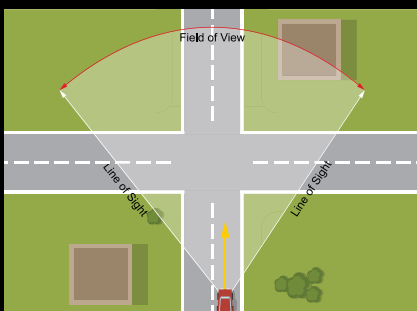

16 years

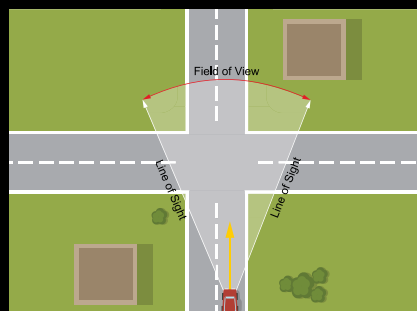

46 years

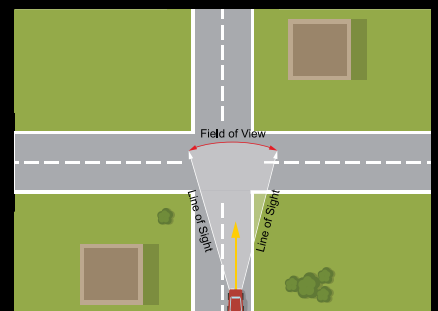

76 years

Light explained

Luminous ranges




More light means

- More light on the road where it is needed
- Better and wider illumination of the road thanks to "more light"
- Extended range (broader/further)
- Suitable light distribution: Sufficient illumination to the front and sides without dazzling other road users
- More light often means a shorter lifetime

 UP TO **50**%*

 UP TO **100**%*

* Compared to standard halogen lamps

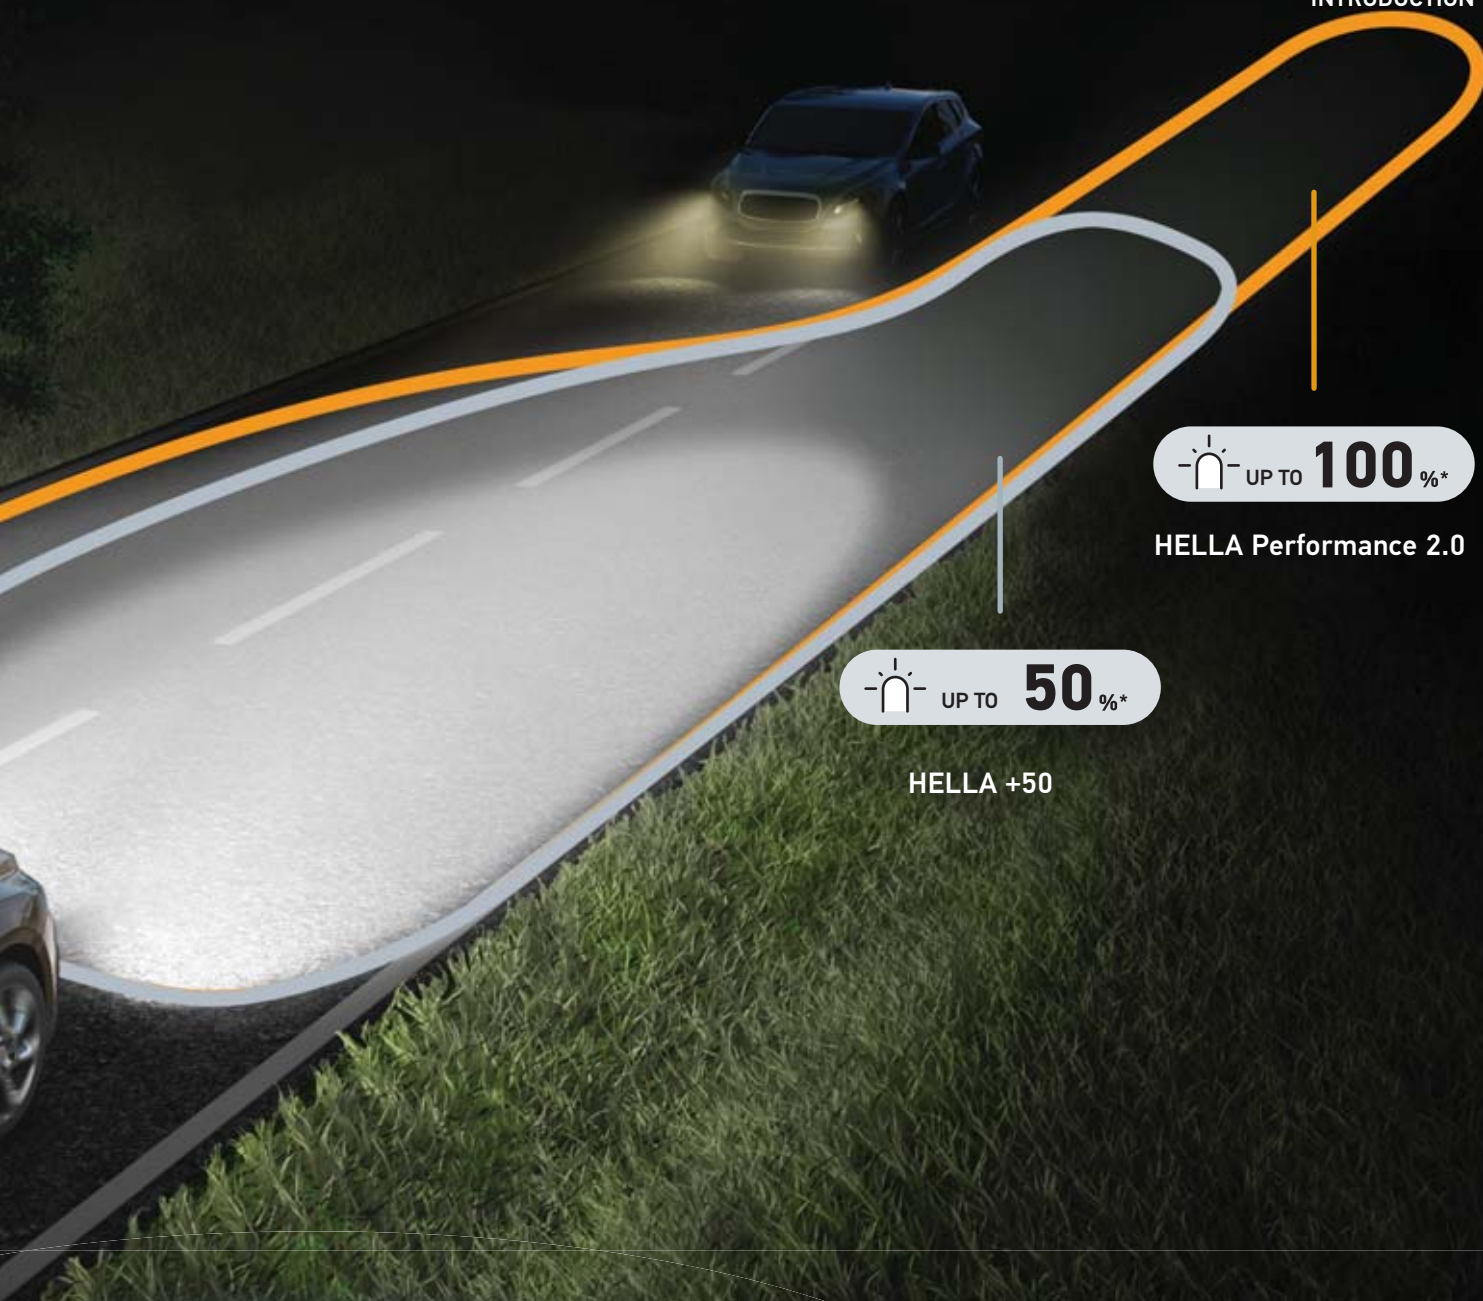

UP TO **100**%*

HELLA Performance 2.0

UP TO **50**%*

HELLA +50

A bulb long lifetime is

- A bulb's lifetime cannot be expressed in kilometres or years.
- Instead, it is defined by operating hours.
- Two measurements are used for bulbs: B3 and Tc.
- B3 is the minimum number of hours for 97 % of bulbs.
- After this time, the number of failed bulbs increases.
- Tc indicates the time at which 63 % of the lamps have failed.
- On average, a standard H7 lamp with 12 V has a B3 of 300 h and a Tc of 500 h according to IEC requirements. Long-life bulbs offer up to 3 times the value → the number of replacement intervals is reduced..

UP TO **2x** LIFETIME

Light explained

Light technologies



Halogen

- The classic in-vehicle lighting: a glass capsule filled with halogen gas with a tungsten wire which, when heated with electricity, emits light
- Strong price-performance ratio
- Easy replacement of the bulb

Xenon

- Better light output with up to twice as much light*
- Gas discharge lamps produce light by passing current through ionised xenon gas at high pressure
- Brighter light colour: "more light" provides brighter and wider illumination of the road*
- More complex maintenance required

* Compared to standard halogen lamps



LED

- Powerful light output and good road illumination: quick perception of surroundings and obstacles
- High energy efficiency: Contributes to the conservation of battery resources related to electromobility
- Long lifetime
- Offers attractive styling options with distinctive vehicle and light design



LIGHT UP YOUR BUSINESS


**PASSENGER &
COMMERCIAL
VEHICLES**



1

HEADLIGHT
HALOGEN STANDARD BULBS

LOW BEAM HIGH BEAM * FOG LIGHT (WHERE APPLICABLE)

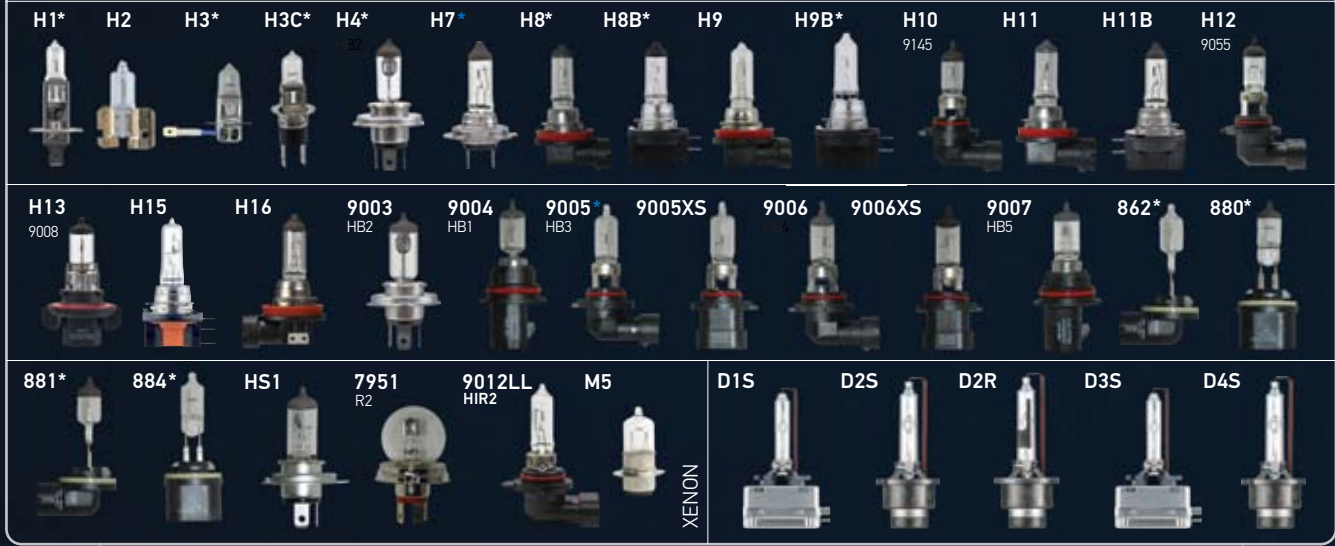

2

INDICATORS

FRONT REAR SIDE



3

POSITION LIGHT

FRONT REAR



4

REVERSE LIGHT

REVERSE LIGHT



5

DASHBOARD

DASHBOARD



6

LICENSE PLATE LIGHT

LED



| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|------------|-----------|---------|-----------|---------|-----------|---------|-----------|----------|--------|----------|--------|--|----------|------------|----------|------------|----------|------------|----------|------------|-----------|------------|-----------|------------|---|--------|------------|------------|-------|-----------|--------|------------|--|-----------|----|-----------|-----|-----------|-----|--|----------|-----------|----------|-----------|--------------|-----------|------------|---------|------------|----|--------|----|------------|--|-----------|--|-----------|--|-----------|--|----------------|--|-------------|--|------------|--|----------------|--|--------------|--|--------------|--|--------------|--|-----------|--|------------|--|
| <p>1</p> <p>PERFORMANCE</p> <p>+50%</p> <table border="0"> <tr><td>H1P50TB</td><td>9004P50TB</td></tr> <tr><td>H3P50TB</td><td>9005P50TB</td></tr> <tr><td>H4P50TB</td><td>9006P50TB</td></tr> <tr><td>H7P50TB</td><td>9007P50TB</td></tr> <tr><td>H11P50TB</td><td></td></tr> <tr><td>H13P50TB</td><td></td></tr> </table> | H1P50TB | 9004P50TB | H3P50TB | 9005P50TB | H4P50TB | 9006P50TB | H7P50TB | 9007P50TB | H11P50TB | | H13P50TB | | <p>PERFORMANCE</p> <p>High Performance 2.0</p> <table border="0"> <tr><td>H1 2.0TB</td><td>9004 2.0TB</td></tr> <tr><td>H3 2.0TB</td><td>9003 2.0TB</td></tr> <tr><td>H7 2.0TB</td><td>9005 2.0TB</td></tr> <tr><td>H9 2.0TB</td><td>9006 2.0TB</td></tr> <tr><td>H11 2.0TB</td><td>9007 2.0TB</td></tr> <tr><td>H13 2.0TB</td><td></td></tr> </table> | H1 2.0TB | 9004 2.0TB | H3 2.0TB | 9003 2.0TB | H7 2.0TB | 9005 2.0TB | H9 2.0TB | 9006 2.0TB | H11 2.0TB | 9007 2.0TB | H13 2.0TB | | <p>HEAVY-DUTY</p> <p>Heavy-Duty</p> <table border="0"> <tr><td>H3HD</td><td>H11 24V DP</td></tr> <tr><td>H3 24V HD</td><td>198HD</td></tr> <tr><td>H4 24V HD</td><td>5637HD</td></tr> <tr><td>H1 24V DP</td><td>7510LTS</td></tr> <tr><td>H3 24V DP</td><td></td></tr> <tr><td>H4 24V DP</td><td></td></tr> <tr><td>H7 24V DP</td><td></td></tr> </table> | H3HD | H11 24V DP | H3 24V HD | 198HD | H4 24V HD | 5637HD | H1 24V DP | 7510LTS | H3 24V DP | | H4 24V DP | | H7 24V DP | | <p>LED</p> <p>Fog light set</p> <table border="0"> <tr><td>H3</td><td>226971511</td></tr> <tr><td>H7</td><td>226971531</td></tr> <tr><td>H8, H11, H16</td><td>226971551</td></tr> </table> | H3 | 226971511 | H7 | 226971531 | H8, H11, H16 | 226971551 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H1P50TB | 9004P50TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3P50TB | 9005P50TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4P50TB | 9006P50TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7P50TB | 9007P50TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H11P50TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H13P50TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H1 2.0TB | 9004 2.0TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 2.0TB | 9003 2.0TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7 2.0TB | 9005 2.0TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H9 2.0TB | 9006 2.0TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H11 2.0TB | 9007 2.0TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H13 2.0TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3HD | H11 24V DP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 24V HD | 198HD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4 24V HD | 5637HD | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H1 24V DP | 7510LTS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 24V DP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4 24V DP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7 24V DP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 | 226971511 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7 | 226971531 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H8, H11, H16 | 226971551 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>LONG LIFE</p> <p>Long Life</p> <table border="0"> <tr><td>H1LL</td><td>9003LL</td></tr> <tr><td>H3LL</td><td>9004LL</td></tr> <tr><td>H4LL</td><td>9005LL</td></tr> <tr><td>H7LL</td><td>9006LL</td></tr> <tr><td>H11LL</td><td>9007LL</td></tr> <tr><td>H13LL</td><td>9012LL</td></tr> </table> | H1LL | 9003LL | H3LL | 9004LL | H4LL | 9005LL | H7LL | 9006LL | H11LL | 9007LL | H13LL | 9012LL | <p>DESIGN</p> <p>OPTILUX Extreme White XB</p> <table border="0"> <tr><td>880</td><td>H10</td></tr> <tr><td>881</td><td>H11</td></tr> <tr><td>893</td><td>H13/9008</td></tr> <tr><td>H1</td><td>H16/9009</td></tr> <tr><td>H3</td><td>9004 / HB1</td></tr> <tr><td>H3C</td><td>9005 / HB3</td></tr> <tr><td>H4/9003</td><td>9005XS</td></tr> <tr><td>H7</td><td>9006 / HB4</td></tr> <tr><td>H8</td><td>9006XS</td></tr> <tr><td>H9</td><td>9007 / HB5</td></tr> </table> | 880 | H10 | 881 | H11 | 893 | H13/9008 | H1 | H16/9009 | H3 | 9004 / HB1 | H3C | 9005 / HB3 | H4/9003 | 9005XS | H7 | 9006 / HB4 | H8 | 9006XS | H9 | 9007 / HB5 | <p>DESIGN</p> <p>OPTILUX Extreme Yellow XY</p> <table border="0"> <tr><td>880</td><td>H9</td></tr> <tr><td>881</td><td>H10</td></tr> <tr><td>893</td><td>H11</td></tr> <tr><td>894</td><td>H13/9008</td></tr> <tr><td>H1</td><td>H16/9009</td></tr> <tr><td>H3</td><td>9004 / HB1</td></tr> <tr><td>H3C</td><td>9005 / HB3</td></tr> <tr><td>H4/9003</td><td>9006 / HB4</td></tr> <tr><td>H7</td><td>9006XS</td></tr> <tr><td>H8</td><td>9007 / HB5</td></tr> </table> | 880 | H9 | 881 | H10 | 893 | H11 | 894 | H13/9008 | H1 | H16/9009 | H3 | 9004 / HB1 | H3C | 9005 / HB3 | H4/9003 | 9006 / HB4 | H7 | 9006XS | H8 | 9007 / HB5 | <p>HIGH WATTAGE</p> <p>High Wattage</p> <table border="0"> <tr><td>H1 100WTB</td><td></td></tr> <tr><td>H3 100WTB</td><td></td></tr> <tr><td>H3 130WTB</td><td></td></tr> <tr><td>9004 100/80WTB</td><td></td></tr> <tr><td>9005 100WTB</td><td></td></tr> <tr><td>9006 80WTB</td><td></td></tr> <tr><td>9007 100/80WTB</td><td></td></tr> <tr><td>H4 100/55WTB</td><td></td></tr> <tr><td>H4 100/80WTB</td><td></td></tr> <tr><td>H4 130/90WTB</td><td></td></tr> <tr><td>H7 100WTB</td><td></td></tr> <tr><td>H11 24V DP</td><td></td></tr> </table> | H1 100WTB | | H3 100WTB | | H3 130WTB | | 9004 100/80WTB | | 9005 100WTB | | 9006 80WTB | | 9007 100/80WTB | | H4 100/55WTB | | H4 100/80WTB | | H4 130/90WTB | | H7 100WTB | | H11 24V DP | |
| H1LL | 9003LL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3LL | 9004LL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4LL | 9005LL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7LL | 9006LL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H11LL | 9007LL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H13LL | 9012LL | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 880 | H10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 881 | H11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 893 | H13/9008 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H1 | H16/9009 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 | 9004 / HB1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3C | 9005 / HB3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4/9003 | 9005XS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7 | 9006 / HB4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H8 | 9006XS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H9 | 9007 / HB5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 880 | H9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 881 | H10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 893 | H11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 894 | H13/9008 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H1 | H16/9009 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 | 9004 / HB1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3C | 9005 / HB3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4/9003 | 9006 / HB4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7 | 9006XS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H8 | 9007 / HB5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H1 100WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 100WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H3 130WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9004 100/80WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9005 100WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9006 80WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9007 100/80WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4 100/55WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4 100/80WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H4 130/90WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H7 100WTB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H11 24V DP | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |



11 FOG LIGHT **LED**

| | | | | |
|----------------------------|--------------------|-------------------|-----------------|-------------------|
| H1 | H3 | H4 | H7 | H8/H11/H16 |
| | | | | |
| 9005/9005 BH3 / HB4 | 9012 / HIR2 | MOTORCYCLE | HS1 / H4 | M5 |
| | | | | |



10 GLOVE BOX LIGHT

| | | |
|--------------------|--------------------|--------------------|
| 2825 W5W | 7440 C5W | 5007 R5W |
| | | |

9 TRUNK LIGHT

| | | | |
|--------------------|--------------------|--------------------|---------------------------|
| 5007 R5W | 7440 C5W | 6411 10W | 6411 LED |
| | | | |

7 INTERIOR LIGHT

| | | | | | | | | | |
|--------------------|--------------------|---------------------|--------------------|--------------------|-----------------------|---------------------------|--------------------------|---------------------------|---------------------------|
| 7440 H6W | 7443 R5W | 5008 R10W | 6413 C5W | 2825 W5W | 6428 M Bulb | 194B LED | 921 LED | 6411 LED | 6418 LED |
| | | | | | | | | | |

8 STOP LIGHT

| | | | | | |
|-----------------------|-----------------------|---------------------|---------------------|-----------------------|--------------------|
| 7537 P21/5W | 7225 P21/4W | 7506 P21W | 7440 W21W | 7443 W21/5W | 5007 R5W |
| | | | | | |

PRODUCT RANGE

COMPLIES WITH ECE, SAE AND INMETRO STANDARD*

*Where applicable



STANDARD
Standard Halogen Bulbs - 12 V

| | | | |
|-----|--------|------------|------------|
| 862 | 898 | H3 35W | H15 |
| 880 | 899 | H4 | H16 |
| 881 | 9003 | H4 35/35W | HS1 |
| 884 | 9004 | H4 45/45W | H10W |
| 885 | 9005 | H4 P45T | H20W |
| 886 | 9005XS | H7 | H21W |
| 887 | 9006 | H8 | H5W |
| 888 | 9006XS | H8B | H6W |
| 889 | 9007 | H9 | M5 35/35W |
| 890 | 9009S | H9B | M5 35/35W1 |
| 891 | HIR2 | H10 (9145) | M5 25/25W |
| 892 | H1 | H11 | M5 25/25W1 |
| 893 | H2 | H11B | M5 18/18W |
| 894 | H3 | H12 (9055) | M5 35/35W3 |
| 896 | H3C | H13 | M5 25/25W3 |

Standard Halogen Bulbs - 24 V

| | |
|--------|----------|
| H1 24V | H7 24V |
| H3 24V | H11 24V |
| H4 24V | H21W 24V |

STANDARD
Standard Halogen Bulbs Blister Pack - 12 V



| Double Blister Pack | Single Blister Pack |
|---------------------|---------------------|
| 9003TB, 9004TB, | 9003SB, 9004SB, |
| 9005TB, 9006TB, | 9005SB, 9006SB, |
| 9007TB, H1TB, | 9007SB, H1SB, |
| H10TB, H11TB, | H10SB, H11SB, |
| H13TB, H3TB, | H13SB, H3SB, |
| H3 35WTB, H4TB, | H3 35WSB, H4SB, |
| H4 35/35WTB, | H4 35/35WSB, |
| H4 45/45WTB, | H4 45/45WSB, |
| H4 P45TTB, | H4 P45TSB, H7SB, |
| H7TB, H8TB, | H8SB, H9SB, |
| H9TB, HS1TB | HS1SB, H16SB |
| M5 35/35WTB | M5 35/35WSB |

Standard Halogen Bulbs Blister Pack - 24 V

| Double Blister Pack | Single Blister Pack |
|---------------------|---------------------|
| H1 24VTB | H1 24VSB |
| H3 24VTB | H3 24VSB |
| H4 24VTB | H4 24VSB |
| H7 24VTB | H7 24VSB |
| H9 24VTB | H9 24VSB |
| H11 24VTB | H11 24VSB |



STANDARD
Miniature Bulbs - (Box - Multiple voltages)

| | | | | |
|----------|--------|--------|--------|-------------|
| 17 | 194R | 3157NA | 6411 | 7507 |
| 1003 | 198HD | 3457 | 6413 | 7507C |
| 1004 | 199 | 3457NA | 6418 | 7511 |
| 1034 | 2057 | 3496 | 6423 | 7528 |
| 1034A | 2057NA | 3497 | 6424 | 7533 |
| 1034NA | 2357 | 3652 | 6428 | 7534 |
| 1073 | 2357NA | 37 | 6429 | 7537 |
| 1141 | 2396 | 3757A | 6430 | 7951 |
| 1141 24V | 2397 | 3796 | 6438 | 7951 55/50W |
| 1156 | 24 | 3797 | 6451 | 7952 |
| 1156NA | 24NA | 3799 | 6453 | 89 |
| 1157 | 265 | 3893 | 6475 | 90 |
| 1157A | 2721 | 3898 | 6476 | 912 |
| 1157NA | 2741 | 3899 | 6480 | 921 |
| 1176 | 2722 | 3930 | 660 | 921NA |
| 1176A | 2723 | 400 | 67 | 93 |
| 1224 | 2741 | 5007 | 7225 | 9507 |
| 1308 | 2820 | 5008 | 7240 | 97 |
| 1445 | 2821 | 51 | 73 | A3603 |
| 158 | 2825 | 53 | 74 | A3625 |
| 158A | 2825BL | 57 | 7440 | DE3021 |
| 168 | 2840 | 5627 | 7440A | DE3022 |
| 1683 | 2841 | 5637 | 7440NA | DE3175 |
| 1816 | 2845 | 5637HD | 7441 | DE3425 |
| 1891 | 2827NA | 6235 | 7443 | JC5 |
| 1893 | 3047 | 6245 | 7443A | JC10 |
| 1895 | 3047LL | 6260 | 7443NA | JC20 |
| 194 | 3057 | 63 | 7506 | PSX24W |
| 194NA | 3156 | 631 | 7506A | |
| 194B | 3157 | 635 | 7506NA | |

STANDARD
Miniature Bulbs Blister Pack

| Double Blister Pack | Single Blister Pack |
|---------------------|---------------------|
| 7506TB | 168TB |
| 1034TB | 73TB |
| 2825TB | 53TB |
| 7528TB | 1157TB |
| 921TB | 7507CTB |
| 7443TB | 1141TB |
| 158TB | 7506ATB |
| 5007TB | 6418TB |
| 67TB | DE3021TB |
| 3898TB | 7225TB |
| 3157TB | 2827NATB |
| 5008TB | 2821TB |
| 5637TB | 7507CTB |
| 3893TB | 1141TB |
| 7440TB | 7506ATB |
| 7507TB | 6418TB |
| DE3175TB | DE3021TB |
| 6411TB | 7225TB |
| 2721TB | 2827NATB |
| | 2821TB |

Miniature Bulbs, Blister Pack - 24 V

| Double Blister Pack | Single Blister Pack |
|---------------------|---------------------|
| 1141 24VTB | 6429TB |
| 2741TB | 7510LTSTB |
| 2841TB | 7511TB |
| 2845TB | 7534TB |
| 3797TB | 7537TB |
| 3930TB | 7952TB |
| 5627TB | 9507TB |
| 6423TB | |



STANDARD
Xenon Lamps (HID)

| |
|------------|
| D1S 4300 K |
| D2S 4300 K |
| D2R 4300 K |
| D3S 4300 K |
| D4S 4300 K |
| D5S 4300 K |



PERFORMANCE
Xenon Lamps +30 (HID)

| |
|------------|
| D1S 5000 K |
| D2S 5000 K |
| D2R 5000 K |



LED
LED Bulbs

| 5000 K | 6500 K |
|------------|--------------|
| 6411LED 5K | 6411LED 6.5K |
| 6418LED 5K | 6418LED 6.5K |
| 921LED 5K | 921LED 6.5K |



LONG LIFE
Long Life 12 V and 24 V

| | |
|--------|-----------|
| 9003LL | H1LL |
| 9004LL | H4 24V LL |
| 9005LL | H7 24V LL |
| 9006LL | H7LL |
| 9007LL | H11LL |
| 9012LL | |

Long Life Miniature Bulbs

| | |
|----------|----------|
| 1003LL | 3757NALL |
| 1141LL | 4114LL |
| 1156LL | 4157NALL |
| 1157LL | 7440LL |
| 168LL | 7440NALL |
| 194LL | 7443LL |
| 2057LL | 7444NALL |
| 2057NALL | 7506ALL |
| 2357LL | 7506LL |
| 3047LL | 921LL |
| 3057LL | DE3175LL |
| 3157LL | |



A: Amber glass



NA: Natural Amber glass

The "Amber Crystal" bulbs have an amber tint on their crystal.
The "Natural amber glass" bulbs are made with a mixture of minerals that provide the amber color in the crystal.

Part No. Nomenclature

- A: Amber glass
- NA: Natural amber glass
- BL: Blue crystal
- R: Red crystal
- C: Clear glass, (transparent)
- CB: Light blue glass
- TCB: Light blue glass - two pieces
- P50: 50% more light than standard HELLA bulbs
- HD: Heavy equipment
- YL: Yellow glass
- TB: Blister Pack double
- ◆: New product

PERFORMANCE

+50 - 12V



PERFORMANCE

High Performance 2.0



Double Plastic Case

DESIGN

Optilux Extreme White XB - 12V



Box

| |
|---------|
| H1P50 |
| H4P50 |
| H3P50 |
| H7P50 |
| H11P50 |
| H13P50 |
| 9004P50 |
| 9005P50 |
| 9006P50 |
| 9007P50 |

Double Blister Pack

| |
|-----------|
| H1P50TB |
| H3P50TB |
| H4P50TB |
| H7P50TB |
| H11P50TB |
| H13P50TB |
| 9004P50TB |
| 9005P50TB |
| 9006P50TB |
| 9007P50TB |

Double Blister Pack

| | |
|-----------|------------|
| H1 2.0TB | 9004 2.0TB |
| H3 2.0TB | 9003 2.0TB |
| H7 2.0TB | 9005 2.0TB |
| H9 2.0TB | 9006 2.0TB |
| H11 2.0TB | 9007 2.0TB |
| H13 2.0TB | |

| | | |
|------|----------|-----------|
| 880 | 32 W | H71071212 |
| 881 | 32 W | H71071222 |
| 893 | 37.5 W | H71071232 |
| 9004 | 65/45 W | H71071392 |
| 9005 | 65 W | H71071402 |
| 9005 | 65 W | H71071412 |
| 9005 | 100 W | H71071422 |
| 9006 | 55 W | H71071432 |
| 9006 | 55 W | H71071442 |
| 9006 | 80 W | H71071452 |
| 9007 | 65/55 W | H71071472 |
| H1 | 55 W | H71071242 |
| H10 | 65 W | H71071012 |
| H10 | 42 W | H71071252 |
| H11 | 80 W | H71071032 |
| H11 | 55 W | H71071262 |
| H13 | 100/80 W | H71071052 |
| H13 | 60/55 W | H71071272 |
| H16 | 35 W | H71071282 |
| H2 | 100 W | H71070227 |
| H3 | 100 W | H71070181 |
| H3 | 55 W | H71071312 |
| H3C | 55 W | H71071322 |
| H3C | 80 W | H71071332 |
| H4 | 100/80 W | H71070201 |
| H4 | 60/55 W | H71071352 |
| H7 | 100 W | H71070307 |
| H7 | 55 W | H71071362 |
| H8 | 55 W | H71070772 |
| H8 | 35 W | H71071372 |
| H9 | 100 W | H71070792 |
| H9 | 65 W | H71071382 |
| HB1 | 100/80 W | H71070327 |
| HB3 | 100 W | H71070347 |
| HB4 | 80 W | H71070367 |
| HB5 | 100/80 W | H71070387 |

HIGH WATTAGE

High Wattage 12 V



LED

LED Retrofit

| | |
|-------------------|-----------|
| H3 LED | 226971511 |
| H7 LED | 226971531 |
| H8, H11, H16 LED | 226971551 |
| ◆ H4 LED | 226971521 |
| ◆ H1 LED | 226971501 |
| ◆ H11 LED | 226971541 |
| ◆ 9005/9006 / HB3 | 226971561 |
| ◆ HIR / 9012 LED | 226971571 |
| ◆ HS1 LED | 226971581 |
| ◆ M5 LED | 226971591 |
| ◆ 7443 LED | 226971151 |
| ◆ 7443 LED | 226971161 |
| ◆ 1157 LED | 226971181 |
| ◆ 1156 LED | 226971201 |



Single box

| |
|----------------|
| H1 100W |
| H1 130W |
| H2 100W |
| H3 100W |
| H3 130W |
| H3 24V 100W |
| H4 100/55W |
| H4 100/80W |
| H4 130/90W |
| H4 24V 100/90W |
| H7 100W |
| H7 70W |
| 9004 100/80W |
| 9005 100W |
| 9006 80W |
| 9007 100/80W |

Double Blister Pack

| |
|------------------|
| H1 100WTB |
| H3 100WTB |
| H3 130WTB |
| H4 100/55WTB |
| H4 100/80WTB |
| H4 130/90WTB |
| H7 100WTB |
| 9004 100/80WTB |
| 9005 100WTB |
| 9006 80WTB |
| 9007 100/80WTB |
| H3 24V 100WTB |
| H4 24V 100/90WTB |

Single Blister Pack

| |
|----------------|
| H4 100/80WSB |
| 9007 100/80WSB |
| 9004 100/80WSB |
| 9006 80WSB |
| 9005 100WSB |

Notice that due to the high consumption it can be generated on heating in the wiring of the headlight.

STANDARD

Motorcycle Bulbs

| |
|--------|
| 194 |
| 635 |
| 660 |
| 2721 |
| 3652 |
| 7441 |
| 7951 |
| 7952 |
| 194NA |
| 7440LL |
| 7440NA |
| H11 |
| H11LL |
| H11P50 |
| H21W |
| H6W |
| H9 |



Double Plastic Case

DESIGN

Optilux Extreme Yellow XY - 12V



DOUBLE POWER

HEAVY-DUTY

Heavy-Duty - 12 V and 24 V

Halogen

| |
|------------|
| H3HD |
| H3 24V HD |
| H4 24V HD |
| H1 24V DP |
| H3 24V DP |
| H4 24V DP |
| H7 24V DP |
| H11 24V DP |

Miniature

| |
|---------|
| 198HD |
| 5637HD |
| 7510LTS |

Single Blister Pack

| |
|--------------|
| H1 24V DPSB |
| H3 24V HDSB |
| H3 24V DPSB |
| H4 24V HDSB |
| H4 24V DPSB |
| H7 24V DPSB |
| H11 24V DPSB |



Double Blister Pack

| |
|-------------|
| H3 24V HDTB |
| H4 24V HDTB |

| | | |
|------|---------|-----------|
| 880 | 27 W | H71071172 |
| 881 | 27 W | H71071182 |
| 893 | 37.5 W | H71071192 |
| 9006 | 55 W | H71071462 |
| H1 | 55 W | H71070642 |
| H10 | 42 W | H71071112 |
| H11 | 55 W | H71071132 |
| H13 | 60/55 W | H71071152 |
| H16 | 35 W | H71071302 |
| H3 | 55 W | H71070662 |
| H3C | 55 W | H71071342 |
| H4 | 60/55 W | H71070682 |
| H7 | 55 W | H71070702 |
| H8 | 35 W | H71071072 |
| H9 | 65 W | H71071092 |
| HB1 | 65/45 W | H71070562 |
| HB3 | 65 W | H71070582 |
| HB4 | 55 W | H71070602 |
| HB5 | 60/55 W | H71070622 |

LED Retrofit

Portfolio of headlamps and fog lamps



Stylish look with daylight effect

With our LED retrofits, vehicle lighting can be converted to the latest LED technology. The new LED retrofits offer exceptional brightness and, thanks to optimised light distribution, there is more light on the road where it is needed. A longer lifetime compared to halogen bulbs makes the LED retrofits attractive for all drivers. The stylish look with a cool white beam brings customers a daylight effect at night and more comfort and

pleasure when driving. Our new portfolio offers a comprehensive range of applications, including high beam, low beam, fog lamps and a broad coverage of different vehicles.

**LED
UPGRADE**

Product Video



<https://youtu.be/Sq61XhM67g4>



Standard halogen bulb



HELLA LED Retrofit





12 V



LED (~H1)



LED RETROFIT

226971501

Set of 2

12 / 24

19 W

P14.5s

Up to 6500 K



LED (~H3)



LED RETROFIT

226971511

Set of 2

12 / 24

19 W

PK22s

Up to 6500 K



LED (~H4)



LED RETROFIT

226971521

Set of 2

12 / 24

24 W

P43t

Up to 6500 K



LED (~H7)



LED RETROFIT

226971531

Set of 2

12 / 24

24 W

PX26d

Up to 6500 K



LED-FOG (~H8/H11/H16)



LED RETROFIT

226971551

Set of 2

12 / 24

24 W

PGJ19-1/2/3 Up to 6500 K



LED (~9005/9006~HB3/HB4)



LED RETROFIT

226971561

Set of 2

12 / 24

24 W

P20d/P22d Up to 6500 K



LED (~9012 / HIR2)



LED RETROFIT

226971571

Set of 2

12 / 24

24 W

PX22d



Up to 6500 K



| | | | | | | |
|--|---|---|---|---|--|---|
|  12 V |  |  |  |  |  |  |
| LED (~HS1/H4 Moto)   | | | | | | |

| | | | | | | |
|---------------------|-----------|----------|----|---|------|--------------|
| LED RETROFIT | 226971581 | Set of 2 | 12 | 6 | P43t | Up to 6500 K |
|---------------------|-----------|----------|----|---|------|--------------|



| | | | | | | |
|--|--|--|--|--|--|--|
| LED (~M5 Moto)   | | | | | | |
|--|--|--|--|--|--|--|

| | | | | | | |
|---------------------|-----------|----------|----|---|-----------|--------------|
| LED RETROFIT | 226971591 | Set of 2 | 12 | 6 | P15d-25-1 | Up to 6500 K |
|---------------------|-----------|----------|----|---|-----------|--------------|



ACCESSORIES



LED CANBUS Adapter
for LED-HL (~ H7)

226971611

Set of 2



LED CANBUS Adapter for
LED-Fog (~ H8, H11, H16)

226971631

Set of 2



LED LIGHT REPAIR
CANBUS for LED-HL (~ H7)

226971621

Set of 2



Adapter Rings KIT

226971641

Assortment

| | | | | |
|-----------------------|--------------------------------------|---|---|-------------------|
| Description | LED CANBUS Adapter for LED-HL (~ H7) | LED CANBUS Adapter for LED-Fog (~ H8, H11, H16) | LED LIGHT REPAIR CANBUS for LED-HL (~ H7) | Adapter Rings KIT |
| Part Number | 226971611 | 226971631 | 226971621 | 226971641 |
| Packaging Unit | Set of 2 | Set of 2 | Set of 2 | Assortment |

LED retrofit small lamps

Range for outdoor
lighting functions



Bright output for outdoor applications

HELLA LED Retrofit



HELLA LED Retrofit



| 12V | | Catalog Part Number | HELLA | | V | W | | i |
|---|----------|---------------------|-----------|----------|----|---|-----------|---|
| 6418 LED - Festoon 36 mm | | | | | | | | |
|  | MINI LED | 6418LED 5K | 178560551 | Set of 2 | 12 | 1 | SV8.5-8 | White Light 5,000 K Replace: 6418 |
| | | 6418LED 6.5K | 178560561 | Set of 2 | 12 | 1 | SV8.5-8 | White Light 6,500 K Replace: 6418 |
| 6411 LED - Festoon 41 mm | | | | | | | | |
|  | MINI LED | 6411LED 5K | 178560571 | Set of 2 | 12 | 1 | SV8.5-8 | White Light 5,000 K Replace: 6411, 6413, 6451, 6475 |
| | | 6411LED 6.5K | 178560581 | Set of 2 | 12 | 1 | SV8.5-8 | White Light 6,000 K Replace: 6411, 6413, 6451, 6475 |
| 921 LED - T10 White (~W5W) | | | | | | | | |
|  | MINI LED | 921LED 5K | 178560591 | Set of 2 | 12 | 1 | W2,1x9,5d | White Light 6,000 K Replace: 921, 158, 168, 194, 2820, 2821, 2825, 2827, 3652, 912 |
| | | 921LED 6.5K | 178560601 | Set of 2 | 12 | 1 | W2,1x9,5d | White Light 6,000 K Replace: 921, 158, 168, 194, 2820, 2821, 2825, 2827, 3652, 912 |
| 3157W LED (~P27/7W) | | | | | | | | |
|  | MINI LED | 3157W LED | 226971151 | Set of 2 | 12 | 3 | W2.5x16q | White Ligh 6,000 K. Replace: 3047, 3057, 3157, 3156, 3457, 4057, 4114, 4157 |
| 7443W LED (~W21/5W) | | | | | | | | |
|  | MINI LED | 7443W LED | 226971161 | Set of 2 | 12 | 3 | W3x16q | White Ligh 6,000 K. Replace: 7443 |
| 1157W LED (~P21/5W) | | | | | | | | |
|  | MINI LED | 1157W LED | 226971181 | Set of 2 | 12 | 3 | BAY15d | White Ligh 6,000 K. Replace: 1034, 1157, 2057, 2357, 2397, 3496, 7528, P21/5W |
| 1156W LED (~P21W) | | | | | | | | |
|  | MINI LED | 1156W LED | 226971201 | Set of 2 | 12 | 3 | BA15s | White Ligh 6,000 K. Replace: 1073, 1093, 1129, 1141, 1147, 1159, 1259, 1295, 3496, 5007, 5008, 7506, 1156, P21W |

HELLA HALOGEN BULBS

PRODUCT RANGE



Standard



+50



Long Life

STANDARD

HELLA standard halogen bulbs provide a quality of original equipment manufacturer and great value for your money. The optimal balance between performance and service life. With SAE / ECE and INMETRO approval (when applicable).

- Halogen and Miniature **See page 88**
- Emergency Set **See page 109**
- LED Miniature bulbs **See page 110**
- Bulbs for Motorcycles **See page 126**
- Halogen 12 V Blister Pack **See page 116**
- Miniature Blister Pack **See page 117**
- Halogen 24 V Blister Pack **See page 118**

PERFORMANCE

Our bulbs are establishing new reference points for halogen lighting, making driving safer and more pleasant, providing a beam of light with greater intensity compared to HELLA Standard bulbs. The opaque silver lid offers an elegant look in the clear glass headlights

- High Performance 2.0 **See page 120**
- +50 **See page 121**

LONG LIFE

HELLA Long Life halogen bulbs have a long service life up to 2 times longer than HELLA standard bulbs and are more environmentally friendly, as they do not have to be replaced frequently. Provides an optimal value for your money and the best selection for frequent travelers.

See page 119



Clear Blue

Xtreme Yellow

High Performance 2.0

OPTILUX Extreme White XB

HEAVY DUTY / DOUBLE POWER

Double power of 24V produces the light by means of a single filament. Heavy duty bulbs offer more power, more safety, without dazzling traffic.

The double power reduces costs by increasing the life of up to 100%.

- Heavy Duty See page 123
- Double Power See page 123

HIGH WATTAGE

It offers more light, with double brightness compared to HELLA standard halogen bulbs and greater luminous efficiency, its Special filament guarantees safety and relaxed driving in off-road conditions.

Note: Take into account that due to the high wattage it can generate on heating the wiring of the headlight.


See page 122

DESIGN

Our design bulbs meet special requirements regarding design and safety. The xenon-like effect makes whiter light the correct alternative for design-oriented drivers. Our range of products:

OPTILUX

- Extreme Yellow XY See page 124
- Extreme White XB See page 125

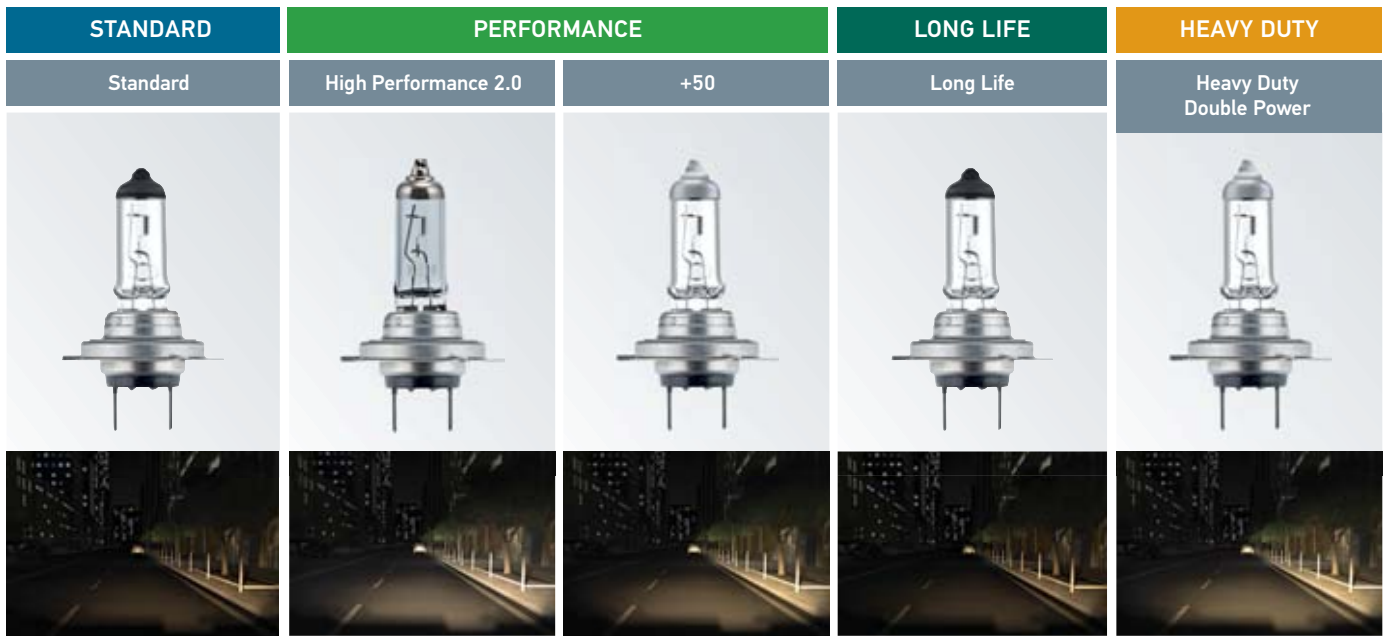

Features:
12 V / 24 V
Best mixture of light output and reliability. Original equipment quality with excellent luminous efficiency and the best quality / price ratio. Meets global standard (ECE R37 & SAE/DOT and INMETRO regulation).


Features:
12 V
Up to 100% more light than HELLA standard bulbs
Meets global standard (ECE R37 & SAE/DOT and INMETRO regulation). Specially designed by halogen mixing gas & filament.

Features:
12 V
Up to 50% more light output than HELLA standard bulbs
Meets global standard (ECE R37 & SAE/DOT and INMETRO regulation). Filament design optimized. Wider and brighter light OE quality. With silver top coating to be invisible in the headlight

Features:
12V / 24 V
Up to 200% longer life time than HELLA standard bulbs. Special mixture of halogen gases to achieve high durability and increase lifetime.Meets global standard (ECE R37 & SAE/DOT regulation).

Features:
24 V
Increased vibration resistance
All advantages of standard bulbs
Reduced downtime cost due to less bulb changes

Extra light output [%] *



Extra light output [%] *



Extra light output [%] *



Extra light output [%] *




Extra light output [%] *




Light colour [K]



Light colour [K]




Light colour [K]




Light colour [K]




Light colour [K]



Service life [h] **




Service life [h] **




Service life [h] **



Service life [h] **



Service life [h] **



Packaging:

Individual box, blister pack

Packaging:

Blister pack

Packaging:

Individual box, blister pack

Packaging:

Individual box

Packaging:

Individual box, blister pack

Applications:



Applications:



Applications:



Applications:



Applications:



Available in:

862, 880, 881, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 896, 898, 899, 9003, 9004, 9005, 9005XS, 9006, 9006XS, 9007, H1, H2, H3, H4, H7, H8, H9, H10 (9145), H11, H12 (9055), H13, H16, HS1, H20W, H21W, H5W, H6W

Available in:

H1, H3, H7, H9, H11, H13 (9008), 9003, 9004 (HB1), 9005 (HB3), 9006 (HB4), 9007 (HB5)

Available in:

H1P50, H3P50, H4P50, H7P50, H11P50, H13P50, 9004P50, 9005P50, 9006P50, 9007P50

Available in:

H1LL, H1 24V LL, H3 24LL, H4LL, H4 24V LL, H7 24LL, H7LL, H11LL, H13LL, 9003LL, 9004LL, 9005LL, 9006LL, 9007LL


Available in:

198HD, 5637HD, 7510LTS, H3 24V HD, H3HD, H4 24V HD

Double Power:

H1 24V DP, H3 24V DP, H4 24V DP, H4 24V DP, H7 24V DP, H11 24V DP



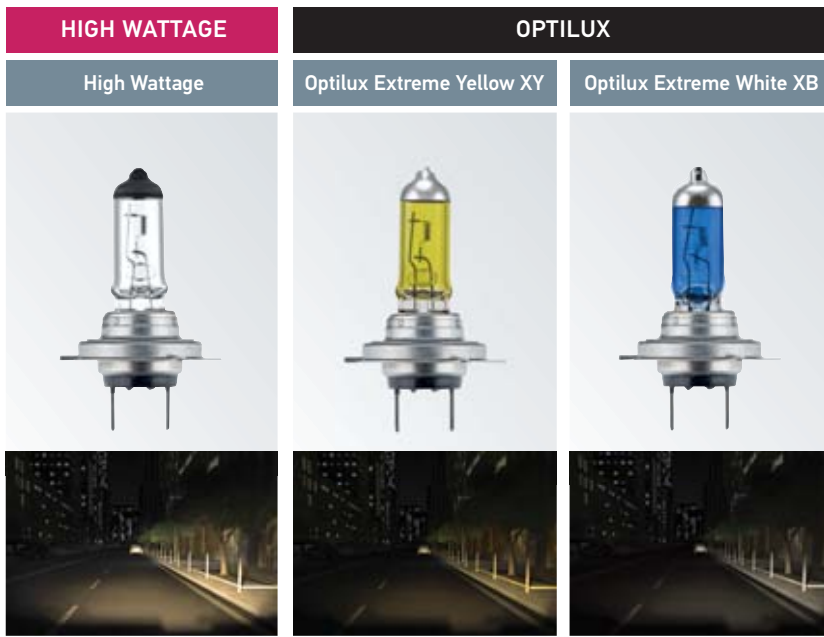

Features:
 12 V
 Longer service life compared to standard HELLA bulbs
 Environmentally friendly, because they do not have to be replaced as often. Excellent luminous efficiency. Excellent quality / price
 For off-road use only

Features:
 12 V
 The XY Optilux bulbs produce a clear yellow light their filament is made of specific measures to provide the exact amount of light needed in the way.

Features:
 12 V
 Extreme White bulbs XB Optilux give a radical look at the xenon light in a halogen bulb, with its blue coating. These bulbs incorporate gas xenon bulb improved performance


Extra light output [%] *




Extra light output [%] *




Extra light output [%] *



Light colour [K]




Light colour [K]




Light colour [K]



Service life [h] **



Service life [h] **



Service life [h] **



Packaging:
 Individual box, blister pack

Packaging:
 Plastic Case

Packaging:
 Plastic Case

Applications:


Applications:


Applications:


Available in:
 H1 100W, H1 130W, H2 100W
 H3 100W, H3 130W,
 H3 24V 100W, H4 100/55W
 H4 100/80W, H4 130/90W
 H4 24V 100/90W, H7 100W
 H7 70W, 9004 100/80W
 9005 100W, 9006 80W
 9007 100/80W

Available in:
 880, 881, 893, 9006,
 H1, H10, H11, H13,
 H16E, H3, H3C, H4
 H7, H8, H9, HB1,
 HB3, HB4, HB5

Available in:
 880, 881, 893, 9004,
 H10, H11, H13, H16,
 H2, H3, H3C, H4, H7,
 H8, H9, HB1, HB3, HB4,
 HB5



SEE THE WORLD WITH DIFFERENT LIGHTS







BULBS MICROSITE

Find the correct application, visit:


www.hella.com/bulbs

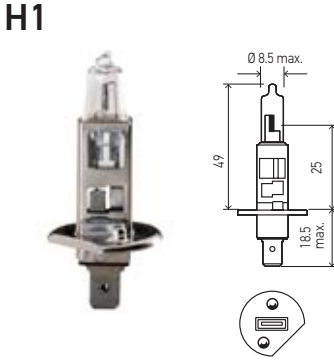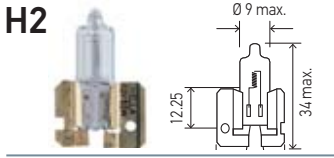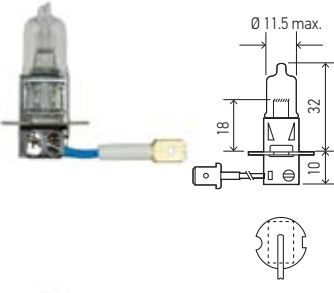


| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|-----------------|---------|---------|--------|-------|------------------------|--------|---------|-----------|-----|-----|--------------|----------------------|
|  | H1 | 12 | 55 W | P14.5s | T2.5 | 1550 | | 1 | C | ■ | ■ | ■ | Standard |
| | H1 24V | 24 | 70 W | P14.5s | T2.5 | 1900 | | 1 | C | | ■ | ■ | Standard |
| | H1P50 | 12 | 55 W | P14.5s | T2.5 | 1700 | | 1 | C | ■ | ■ | ■ | + 50 |
| | ◆ H1P50TB | 12 | 55 W | P14.5s | T2.5 | 1700 | | 2 | B | ■ | ■ | ■ | + 50 |
| | ◆ H1 24V DP | 24 | 70 W | P14.5s | T2.5 | 1900 | | 1 | C | | ■ | ■ | Double Power |
| | H1 100W | 12 | 100 W | P14.5s | T2.5 | 1850 | | 1 | C | | | | High Wattage |
| | H1 130W | 12 | 130 W | P14.5s | T2.5 | 2400 | | 1 | C | | | | High Wattage |
| | ◆ H1 2.0TB | 12 | 55 W | P14.5s | T2.5 | 1550 | 3600 | 2 | B | ■ | ■ | ■ | High Performance 2.0 |
| | H1LL | 12 | 55 W | P14.5s | T2.5 | 1550 | | 1 | C | ■ | ■ | ■ | Long Life |
| | H1 YL | 12 | 55 W | P14.5s | T2.5 | 1550 | 2900 | 2 | B | | | | Xtreme Yellow |
| | H71070227* | 12 | 100 W | P14.5s | T2.5 | | | 2 | P | | | | Extreme White XB |
| | H71071242* | 12 | 55 W | P14.5s | T2.5 | | | 2 | P | | | | Extreme White XB |
| | H71070642* | 12 | 55 W | P14.5s | T2.5 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ H1TB | 12 | 55 W | P14.5s | T2.5 | 1550 | | 2 | B | ■ | ■ | ■ | Standard |
| | ◆ H1SB | 12 | 55 W | P14.5s | T2.5 | 1550 | | 1 | B | ■ | ■ | ■ | Standard |
| | ◆ H1 100WTB | 12 | 100 W | P14.5s | T2.5 | 1850 | | 2 | B | | | | High Wattage |
| | ◆ H1 24VSB | 24 | 70 W | P14.5s | T2.5 | | | 1 | B | | ■ | ■ | Standard |
| | ◆ H1 24VTB | 24 | 70 W | P14.5s | T2.5 | | | 2 | B | | ■ | ■ | Standard |
| ◆ H1 24V DPSB | 24 | 70 W | P14.5s | T2.5 | | | 1 | B | | ■ | ■ | Double Power | |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
|  | H2 | 12 | 55 W | X511 | T3 | | | 1 | C | | | | Standard |
| | H2 100W | 12 | 100 W | X511 | T3 | | | 1 | C | | | | High Wattage |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
|  | H3 | 12 | 55 W | PK22s | T3.25 | 1450 | | 1 | C | ■ | ■ | ■ | Standard |
| | H3 BULLET | 12 | 55 W | PK22s | T3.25 | 1450 | | 1 | C | | | | Standard |
| | H3 35W | 12 | 35 W | PK22s | T3.25 | 750 | | 1 | C | | | | Standard |
| | H3 24V | 24 | 70 W | PK22s | T3.25 | 1750 | | 1 | C | | ■ | ■ | Standard |
| | H3P50 | 12 | 55 W | PK22s | T3.25 | 1600 | | 1 | C | | | | + 50 |
| | ◆ H3P50TB | 12 | 55 W | PK22s | T3.25 | 1600 | | 2 | B | | | | + 50 |
| | H3XE-100CB | 12 | 100 W | PK22s | T3.25 | 1600 | 3600 | 1 | C | | | | Clear Blue/High W |
| | H3 24V DP | 24 | 70 W | PK22s | T3.25 | | | 1 | C | | ■ | ■ | Double Power |
| | H3 24V HD | 24 | 70 W | PK22s | T3.25 | 1750 | | 1 | C | | ■ | ■ | Heavy Duty |
| | ◆ H3HD | 12 | 55 W | PK22s | T3.25 | 1450 | | 1 | C | ■ | ■ | ■ | Heavy Duty |
| | H3 100W | 12 | 100W | PK22s | T3.25 | 1850 | | 1 | C | | | | High Wattage |
| | H3 130W | 12 | 130 W | PK22s | T3.25 | 2600 | | 1 | C | | | | High Wattage |
| | H3 24V 100W | 24 | 100 W | PK22s | T3.25 | 2500 | | 1 | C | | | | High Wattage |
| | ◆ H3 100WTB | 12 | 100 W | PK22s | T3.25 | 1850 | | 2 | B | | | | High Wattage |
| | ◆ H3 130WTB | 12 | 130 W | PK22s | T3.25 | 2600 | | 2 | B | | | | High Wattage |
| | ◆ H3 2.0TB | 12 | 55 W | PK22s | T3.25 | 1450 | 3600 | 2 | B | ■ | ■ | ■ | High Performance 2.0 |
| | H3 YL | 12 | 55 W | PK22s | T3.25 | 1450 | 2900 | 2 | B | | | | Xtreme Yellow |
| | H71070181* | 12 | 100 W | PK22s | T3.25 | | | 2 | P | | | | Extreme White XB |
| | H71071312* | 12 | 55 W | PK22s | T3.25 | | | 2 | P | | | | Extreme White XB |
| | H71070662* | 12 | 55 W | PK22s | T3.25 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ H3TB | 12 | 55 W | PK22s | T3.25 | 1450 | | 2 | B | ■ | ■ | ■ | Standard |
| | ◆ H3 35WTB | 12 | 35 W | PK22s | T3.25 | 750 | | 2 | B | | | | Standard |
| | ◆ H3SB | 12 | 55 W | PK22s | T3.25 | 1450 | | 1 | B | ■ | ■ | ■ | Standard |
| | ◆ H3 35WSB | 12 | 35 W | PK22s | T3.25 | 750 | | 1 | B | | | | Standard |
| | ◆ H3 24V DPSB | 24 | 70 W | PK22s | T3.25 | | | 1 | B | | ■ | ■ | Double Power |
| | ◆ H3 24V HDSB | 24 | 70 W | PK22s | T3.25 | | | 1 | B | | ■ | ■ | Heavy Duty |
| | ◆ H3 24VSB | 24 | 70 W | PK22s | T3.25 | | | 1 | B | | ■ | ■ | Standard |
| | ◆ H3 24V 100WTB | 24 | 100 W | PK22s | T3.25 | | | 2 | B | | | | High Wattage |
| ◆ H3 24V HDTB | 24 | 70 W | PK22s | T3.25 | | | 2 | B | | ■ | ■ | Heavy Duty | |
| ◆ H3 24VTB | 24 | 70 W | PK22s | T3.25 | | | 2 | B | | ■ | ■ | Standard | |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
|  | H71071322* | 12 | 55 W | P22d | T3.25 | | | 2 | P | | | | Extreme White XB |
| | H71071332* | 12 | 80 W | P22d | T3.25 | | | 2 | P | | | | Extreme White XB |
| | H71071342* | 12 | 55 W | P22d | T3.25 | | | 2 | P | | | | Extreme Yellow XY |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product



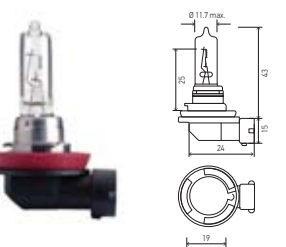

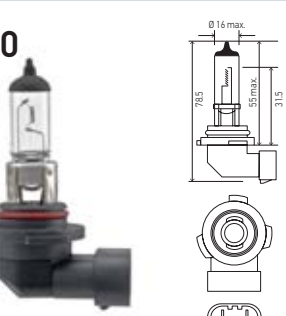
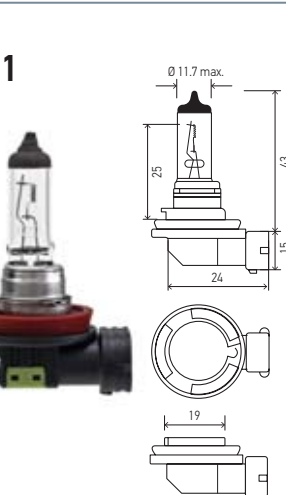
Measures in millimeters
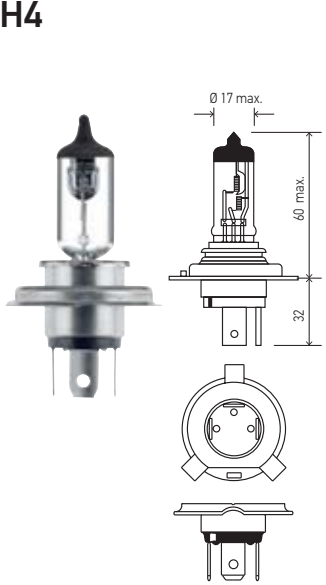
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|--|-------------------|---------|----------|--------|--------|------------------------|--------|---------|-----------|-----|-----|--------------|-------------------|
| H4  | H4 | 12 | 60/55 W | P43t | T4.625 | 1650/1000 | 3200 | 1 | C | | ■ | ■ | Standard |
| | H4 24V | 24 | 75/70 W | P43t | T4.625 | 1900/1200 | | 1 | C | | ■ | ■ | Standard |
| | H4 35/35W | 12 | 35/35 W | P43t | T4.625 | 825/525 | | 1 | C | | | | Standard |
| | H4 45/45W | 12 | 45/45 W | P43t | T4.625 | | | 1 | C | | | | Standard |
| | H4 P45T | 12 | 60/55 W | P45t | T4.625 | 1650/1000 | | 1 | C | | | | Standard |
| | H4P50 | 12 | 60/55 W | P43t | T4.625 | 1815/1100 | | 1 | C | | ■ | ■ | + 50 |
| | ◆ H4P50TB | 12 | 60/55 W | P43t | T4.625 | 1815/1100 | | 2 | B | | ■ | ■ | + 50 |
| | H4XE-CB | 12 | 60/55 W | P43t | T4.625 | 1650/1000 | 3600 | 1 | C | | | | Clear Blue |
| | H4XE-100CB | 12 | 100/80 W | P43t | T4.625 | 2000/1350 | 3600 | 1 | C | | | | Clear Blue/High W |
| | ◆ H4 24V DP | 24 | 75/70 W | P43t | T4.625 | 1900/1200 | | 1 | C | | ■ | ■ | Double Power |
| | H4 24V HD | 24 | 75/70 W | P43t | T4.625 | 1900/1200 | | 1 | C | | ■ | ■ | Heavy Duty |
| | H4 100/55W | 12 | 100/55 W | P43t | T4.625 | 2400/1000 | | 1 | C | | | | High Wattage |
| | H4 100/80W | 12 | 100/80 W | P43t | T4.625 | | | 1 | C | | | | High Wattage |
| | H4 130/90W | 12 | 130/90 W | P43t | T4.625 | 3200/1600 | | 1 | C | | | | High Wattage |
| | H4 24V 100/90W | 24 | 100/90 W | P43t | T4.625 | | | 1 | C | | | | High Wattage |
| | ◆ H4 100/55WTB | 12 | 100/55 W | P43t | T4.625 | 2400/1000 | | 2 | B | | | | High Wattage |
| | ◆ H4 100/80WTB | 12 | 100/80 W | P43t | T4.625 | | | 2 | B | | | | High Wattage |
| | ◆ H4 130/90WTB | 12 | 130/90 W | P43t | T4.625 | 3200/1600 | | 2 | B | | | | High Wattage |
| | ◆ H4 100/80WSB | 12 | 100/80 W | P43t | T4.625 | | | 1 | B | | | | High Wattage |
| | ◆ H4 24V LL | 24 | 75/70 W | P43t | T4.625 | 1900/1200 | | 1 | C | | | | Long Life |
| | H4 YL | 12 | 60/55 W | P43t | T4.625 | 1650/1000 | 2800 | 2 | P | | | | Xtreme Yellow |
| | H71070201* | 12 | 100/80 W | P43t | T4.625 | | | 2 | P | | | | Extreme White XB |
| | H71071352* | 12 | 60/55 W | P43t | T4.625 | | | 2 | P | | | | Extreme White XB |
| | H71070682* | 12 | 60/55 W | P43t | T4.625 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ H4TB | 12 | 60/55 W | P43t | T4.625 | 1650/1000 | 3200 | 2 | B | | ■ | ■ | Standard |
| | ◆ H4 35/35WTB | 12 | 35 /35 W | P43t | T4.625 | | | 2 | B | | | | Standard |
| | ◆ H4 45/45WTB | 12 | 45 /45 W | P43t | T4.625 | | | 2 | B | | | | Standard |
| | ◆ H4 P45TTB | 12 | 60/55 W | P45t | T4.625 | | | 2 | B | | | | Standard |
| | ◆ H4SB | 12 | 60/55 W | P43t | T4.625 | 1650/1000 | 3200 | 1 | B | | ■ | ■ | Standard |
| | ◆ H4 35/35WSB | 12 | 35 /35 W | P43t | T4.625 | | | 1 | B | | | | Standard |
| | ◆ H4 45/45WSB | 12 | 45 /45 W | P43t | T4.625 | | | 1 | B | | | | Standard |
| | ◆ H4 P45TSB | 12 | 60/55 W | P45t | T4.625 | 1650/1000 | | 1 | B | | | | Standard |
| | ◆ H424V 100/90WTB | 24 | 100/90 W | P43t | T4.625 | | | 2 | B | | | | High Wattage |
| | ◆ H4 24V HDTB | 24 | 75/70 W | P43t | T4.625 | | | 2 | B | | ■ | ■ | Heavy Duty |
| | ◆ H4 24VTB | 24 | 75/70 W | P43t | T4.625 | | | 2 | B | | ■ | ■ | Standard |
| ◆ H4 24V DPSB | 24 | 75/70 W | P43t | T4.625 | | | 1 | B | | ■ | ■ | Double Power | |
| ◆ H4 24V HDSB | 24 | 75/70 W | P43t | T4.625 | | | 1 | B | | ■ | ■ | Heavy Duty | |
| ◆ H4 24VSB | 24 | 75/70 W | P43t | T4.625 | | | 1 | B | | ■ | ■ | Standard | |

LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE)


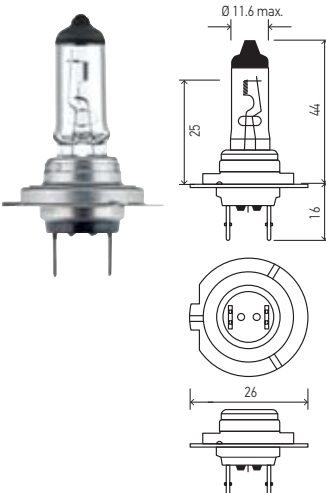

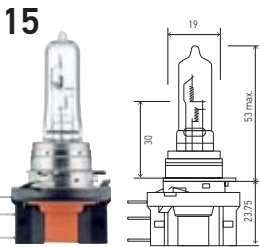
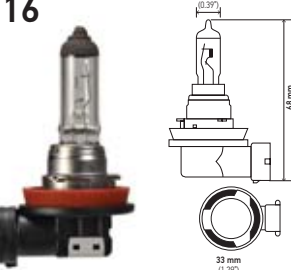
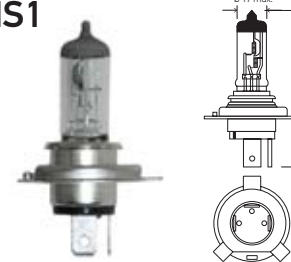
| | | | | | | | | | | | | | | |
|--|-------------|------|-------|--------|--------|------|------|---|---|---|---|---|----------------------|----------|
| H7  | H7 | 12 | 55 W | PX26d | T4.625 | 1350 | | 1 | C | ■ | ■ | ■ | Standard | |
| | H7 24V | 24 | 70 W | PX26d | T4.625 | 1750 | | 1 | C | | ■ | ■ | Standard | |
| | H7P50 | 12 | 55 W | PX26d | T4.625 | 1560 | | 1 | C | ■ | ■ | ■ | + 50 | |
| | ◆ H7P50TB | 12 | 55 W | PX26d | T4.625 | 1560 | | 2 | B | ■ | ■ | ■ | + 50 | |
| | ◆ H7 24V DP | 24 | 70 W | PX26d | T4.625 | | | 1 | C | | ■ | ■ | Double Power | |
| | H7 70W | 12 | 70 W | PX26d | T4.625 | 1800 | | 1 | C | | | | High Wattage | |
| | H7 100W | 12 | 100 W | PX26d | T4.625 | 2000 | | 1 | C | | | | High Wattage | |
| | ◆ H7 100WTB | 12 | 100 W | PX26d | T4.625 | 2000 | | 2 | B | | | | High Wattage | |
| | ◆ H7 2.0TB | 12 | 55 W | PX26d | T4.625 | 1500 | | 2 | P | | ■ | ■ | High Performance 2.0 | |
| | H7 24V LL | 24 | 70 W | PX26d | T4.625 | 1750 | | 1 | C | | ■ | ■ | Long Life | |
| | H7LL | 12 | 55 W | PX26d | T4.625 | 1500 | 3700 | 1 | C | ■ | ■ | ■ | Long Life | |
| | H7 YL | 12 | 55 W | PX26d | T4.625 | 1500 | | 2 | P | | | | Xtreme Yellow | |
| | H71070307* | 12 | 100 W | PX26d | T4.625 | | | 2 | P | | | | Extreme White XB | |
| | H71071362* | 12 | 55 W | PX26d | T4.625 | | | 2 | P | | | | Extreme White XB | |
| | H71070702* | 12 | 55 W | PX26d | T4.625 | | | 2 | P | | | | Extreme Yellow XY | |
| | ◆ H7TB | 12 | 55 W | PX26d | T4.625 | 1350 | | 2 | B | | ■ | ■ | ■ | Standard |
| | ◆ H7SB | 12 | 55 W | PX26d | T4.625 | 1350 | | 1 | B | | ■ | ■ | ■ | Standard |
| ◆ H7 24VSB | 24 | 70 W | PX26d | T4.625 | | | 1 | B | | ■ | ■ | ■ | Standard | |
| ◆ H7 24VTB | 24 | 70 W | PX26d | T4.625 | | | 2 | B | | ■ | ■ | ■ | Standard | |
| ◆ H7 24V DPSB | 24 | 70 W | PX26d | T4.625 | | | 1 | B | | ■ | ■ | ■ | Double Power | |

LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE)


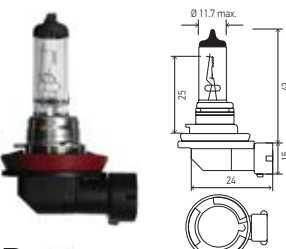

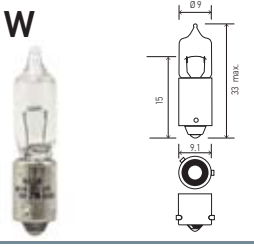
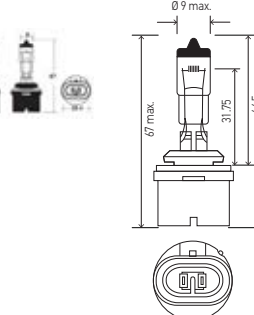
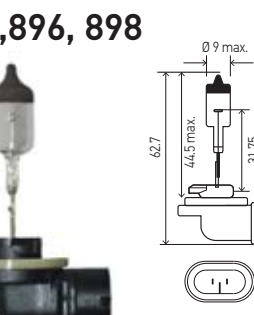
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features | |
|---|--|-----------------|---------|---------|---------|------------------------|--------|---------|-----------|-----|-----|----------|----------------------|----------------------|
| H8  H8B  | H8 | 12 | 35 W | PGJ19-1 | T4 | 800 | | 1 | C | ■ | ■ | | Standard | |
| | H71070772* | 12 | 55 W | PGJ19-1 | T4 | | | 2 | P | | | | Extreme White XB | |
| | H71071072* | 12 | 35 W | PGJ19-1 | T4 | | | 2 | P | | | | Extreme Yellow XY | |
| | H71071372* | 12 | 35 W | PGJ19-1 | T4 | | | 2 | P | | | | Extreme White XB | |
| | ◆ H8TB | 12 | 35 W | PGJ19-1 | T4 | 800 | | 2 | B | ■ | ■ | | Standard | |
| | ◆ H8SB | 12 | 35 W | PGJ19-1 | T4 | 800 | | 1 | B | ■ | ■ | | Standard | |
| | ◆ H8B | 12 | 35 W | PGJ19-1 | T4 | 800 | | 1 | C | | ■ | | Standard | |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
| | H9  H9B  | H9 | 12 | 65 W | PGJ19-5 | T4 | 2100 | | 1 | C | ■ | ■ | | Standard |
| | | H9 2.0TB | 12 | 65 W | PGJ19-5 | T4 | 2100 | 3700 | 2 | P | ■ | ■ | | High Performance 2.0 |
| ◆ H71070792* | | 12 | 100 W | PGJ19-5 | T4 | | | 2 | P | | | | Extreme White XB | |
| H71071092* | | 12 | 65 W | PGJ19-5 | T4 | | | 2 | P | | | | Extreme Yellow XY | |
| H71071382* | | 12 | 65 W | PGJ19-5 | T4 | | | 2 | P | | | | Extreme White XB | |
| ◆ H9TB | | 12 | 65 W | PGJ19-5 | T4 | 2100 | | 2 | B | ■ | ■ | | Standard | |
| ◆ H9SB | | 12 | 65 W | PGJ19-5 | T4 | 2100 | | 1 | B | | | | Standard | |
| ◆ H9 24VSB | | 24 | 80 W | PGJ19-5 | T4 | | | 1 | B | | | | Standard | |
| ◆ H9 24VTB | | 24 | 80 W | PGJ19-5 | T4 | | | 2 | B | | | | Standard | |
| ◆ H9B | | 12 | 65 W | PGJ19-5 | T4 | 2100 | | 1 | C | | ■ | | Standard | |
| HIGH BEAM, WORK LIGHT | | | | | | | | | | | | | | |
| H10  | H10 | 12 | 45 W | PY20d | T4 | 850 | | 1 | C | | ■ | | Standard | |
| | H71071012* | 12 | 65 W | PY20d | T4 | | | 2 | P | | | | Extreme White XB | |
| | H71071112* | 12 | 42 W | PY20d | T4 | | | 2 | P | | | | Extreme Yellow XY | |
| | H71071252* | 12 | 42 W | PY20d | T4 | | | 2 | P | | | | Extreme White XB | |
| | ◆ H10TB | 12 | 45 W | PY20d | T4 | 850 | | 2 | B | | ■ | | Standard | |
| | ◆ H10SB | 12 | 45 W | PY20d | T4 | 850 | | 1 | B | | ■ | | Standard | |
| | LOW BEAM | | | | | | | | | | | | | |
| H11  | H11 | 12 | 55 W | PGJ19-2 | T4 | 1350 | | 1 | C | ■ | ■ | | Standard | |
| | H11 24V | 24 | 70 W | PGJ19-2 | T4 | 1600 | | 1 | C | | ■ | | Standard | |
| | H11P50 | 12 | 55 W | PGJ19-2 | T4 | 1450 | | 1 | C | ■ | ■ | | + 50 | |
| | ◆ H11P50TB | 12 | 55 W | PGJ19-2 | T4 | 1450 | | 2 | B | | | | + 50 | |
| | H11XE-CB | 12 | 55 W | PGJ19-2 | T4 | 1350 | 3600 | 1 | C | | | | Clear Blue | |
| | ◆ H11 24V DP | 24 | 70 W | PGJ19-2 | T4 | | | 1 | C | | ■ | | Double Power | |
| | ◆ H11 2.0TB | 12 | 55 W | PGJ19-2 | T4 | 1350 | 3700 | 2 | P | ■ | ■ | | High Performance 2.0 | |
| | H11LL | 12 | 55 W | PGJ19-2 | T4 | 1350 | | 1 | C | ■ | ■ | | Long Life | |
| | H11 YL | 12 | 55 W | PGJ19-2 | T4 | 1450 | 3000 | 2 | B | | | | Xtreme Yellow | |
| | H71071032* | 12 | 80 W | PGJ19-2 | T4 | | | 2 | P | | | | Extreme White XB | |
| | H71071132* | 12 | 55 W | PGJ19-2 | T4 | | | 2 | P | | | | Extreme Yellow XY | |
| | H71071262* | 12 | 55 W | PGJ19-2 | T4 | | | 2 | P | | | | Extreme White XB | |
| | ◆ H11TB | 12 | 55 W | PGJ19-2 | T4 | 1350 | | 2 | B | ■ | ■ | | Standard | |
| | ◆ H11SB | 12 | 55 W | PGJ19-2 | T4 | 1350 | | 1 | B | ■ | ■ | | Standard | |
| | ◆ H11 24V DPSB | 24 | 70 W | PGJ19-2 | T4 | | | 1 | B | | ■ | | Double Power | |
| ◆ H11 24VSB | 24 | 70 W | PGJ19-2 | T4 | | | 1 | B | | ■ | | Standard | | |
| ◆ H11 24VTB | 24 | 70 W | PGJ19-2 | T4 | | | 2 | B | | ■ | | Standard | | |
| LOW BEAM | | | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters
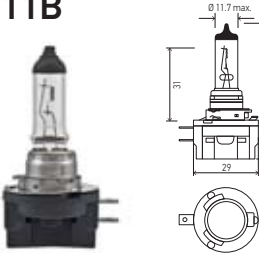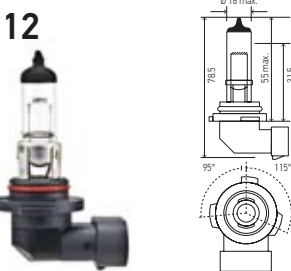
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|---|---------|----------|----------|--------|------------------------|--------|---------|-----------|-----|-----|---------|----------------------|
| H11B  | H11B | 12 | 55 W | PGJY192 | T3.25 | 1345 | 3100 | 1 | C | ■ | ■ | | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
| H12  | H12 | 12 | 55 W | PZ20d | T4 | 1050 | | 1 | C | | ■ | | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
| H13 9008  | H13 | 12 | 60/55 W | P26.4t | T4 | 1700/1100 | | 1 | C | ■ | ■ | | Standard |
| | H13P50 | 12 | 60/55 W | P26.4t | T4 | 1650/1100 | | 1 | C | ■ | ■ | | + 50 |
| | H13P50TB | 12 | 60/55 W | P26.4t | T4 | 1650/1100 | | 2 | B | ■ | ■ | | + 50 |
| | H13 2.0TB | 12 | 60/55 W | P26.4t | T4 | 1700/1100 | 3700 | 2 | P | ■ | ■ | | High Performance 2.0 |
| | H13 YL | 12 | 60/55 W | P26.4t | T4 | 1700/1100 | 3100 | 2 | B | | | | Xtreme Yellow |
| | H71071052* | 12 | 100/80 W | P26.4t | T4 | | | 2 | P | | | | Extreme White XB |
| | H71071272* | 12 | 60/55 W | P26.4t | T4 | | | 2 | P | | | | Extreme White XB |
| | H71071152* | 12 | 60/55 W | P26.4t | T4 | | | 2 | P | | | | Extreme Yellow XY |
| | H13TB | 12 | 60/55 W | P26.4t | T4 | 1700/1100 | | 2 | B | ■ | ■ | | Standard |
| | H13SB* | 12 | 60/55 W | P26.4t | T4 | 1700/1100 | | 1 | B | ■ | ■ | | Standard |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
| H15  | H15 | 12 | 15/55 W | PGJ23t-1 | T4 | 1330 | 3100 | 1 | C | ■ | ■ | | Standard |
| | FOG LIGHT | | | | | | | | | | | | |
| H16  | H16 | 12 | 19 W | PGJ19-3 | T4 | | 3700 | 1 | C | | ■ | | Standard |
| | H16SB | 12 | 19 W | PGJ19-3 | T4 | | 3700 | 1 | B | | | | Standard |
| FOG LIGHT | | | | | | | | | | | | | |
| HS1  | HS1 | 12 | 35/35 W | PX43t | T4.625 | | | 1 | C | | ■ | | Standard |
| | HS1TB | 12 | 35/35 W | PX43t | T4.625 | | | 2 | B | | ■ | | Standard |
| | HS1SB | 12 | 35/35 W | PX43t | T4.625 | | | 1 | B | | ■ | | Standard |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |

Measures in millimeters

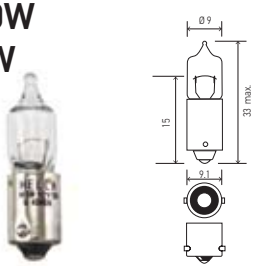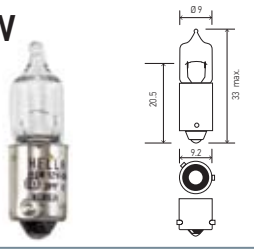
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features | |
|--|--|---------|---------|-------|-------|------------------------|--------|---------|-----------|-----|-----|---------|-------------------|-------------------|
| H20W H5W  | H20W | 12 | 20 W | BA9s | T2.75 | 470 | | 1 | C | | | | Standard | |
| | H5W | 12 | 5 W | BA9s | T2.75 | 80 | | 1 | C | | | | Standard | |
| FLASHER LIGHT, REAR TURN SIGNAL, FRONT, SIDE AND TAIL LIGHT | | | | | | | | | | | | | | |
| H6W  | H6W | 12 | 6 W | BAX9s | T2.75 | 125 | | 1 | C | | ■ | | Standard | |
| | PARKING LIGHT | | | | | | | | | | | | | |
| H10W  | ◆ H10W | 12 | 10 W | BA9s | T2.75 | | | 1 | C | | | ■ | Standard | |
| | PARKING LIGHT | | | | | | | | | | | | | |
| H21W  | H21W | 12 | 21 W | BAY9s | T2.75 | 600 | | 1 | C | | ■ | ■ | Standard | |
| | H21W 24V | 24 | 21 W | BAY9s | T2.75 | | | 1 | C | | ■ | ■ | Standard | |
| FLASHER LIGHT, REAR TURN SIGNAL, FRONT, SIDE AND TAIL LIGHT | | | | | | | | | | | | | | |
| 880  | 880 | 12 | 27 W | PG13 | T3.25 | 540 | | 1 | C | | ■ | ■ | Standard | |
| | H71071172* | 12 | 27 W | PG13 | T3.25 | | | 2 | P | | | | Extreme Yellow XY | |
| | H71071212* | 12 | 32 W | PG13 | T3.25 | | | 2 | P | | | | Extreme White XB | |
| | 880 YL | 12 | 27 W | PG13 | T3.25 | | | 2 | B | | | | Xtreme Yellow | |
| Many bulbs of the 800 series are physically interchangeable but not electrically. Serious damage and blinding by glare can result from misuse of the bulb, so it is important to use only the bulb that is specified for each application. | | | | | | | | | | | | | | |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | | |
| 881, 896, 898  | 881 | 12 | 27 W | PGJ13 | T3.25 | 540 | | 1 | C | ■ | ■ | | Standard | |
| | 896 | 12 | 37.5 W | PGJ13 | T3.25 | 940 | 3100 | 1 | C | | | | Standard | |
| | 898 | 12 | 37.5 W | PGJ13 | T3.25 | 750 | 3100 | 1 | C | | | | Standard | |
| | H71071182* | 12 | 27 W | PGJ13 | T3.25 | | | | 2 | P | | | | Extreme Yellow XY |
| | H71071222* | 12 | 32 W | PGJ13 | T3.25 | | | | 2 | P | | | | Extreme White XB |
| | Many bulbs of the 800 series are physically interchangeable but not electrically. Serious damage and blinding by glare can result from misuse of the bulb, so it is important to use only the bulb that is specified for each application. | | | | | | | | | | | | | |
| LOW BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters

| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|----------------------------|-------------|---------|---------|------|-------|------------------------|--------|---------|-----------|-----|-----|---------|----------|
|----------------------------|-------------|---------|---------|------|-------|------------------------|--------|---------|-----------|-----|-----|---------|----------|

884, 885, 887, 890, 892




| | | | | | | | | | | | | | |
|------------|----|------|------|-------|------|------|--|---|---|--|--|--|----------|
| 884 | 12 | 27 W | PG13 | T3.25 | 540 | | | 1 | C | | | | Standard |
| 885 | 12 | 50 W | PG13 | T3.25 | 1250 | | | 1 | C | | | | Standard |
| 887 | 12 | 50 W | PG13 | T3.25 | 1190 | | | 1 | C | | | | Standard |
| 890 | 12 | 27 W | PG13 | T3.25 | 540 | 1100 | | 1 | C | | | | Standard |
| 892 | 12 | 16 W | PG13 | T3.25 | 350 | | | 1 | C | | | | Standard |

Many bulbs of the 800 series are physically interchangeable but not electrically. Serious damage and blinding by glare can result from misuse of the bulb, so it is important to use only the bulb that is specified for each application.

LOW BEAM, FOG LIGHT (WHERE APPLICABLE)


891



| | | | | | | | | | | | | | |
|------------|----|-----|----|-------|-----|------|--|---|---|--|--|--|----------|
| 891 | 12 | 8 W | G4 | T3.25 | 135 | 3100 | | 1 | C | | | | Standard |
|------------|----|-----|----|-------|-----|------|--|---|---|--|--|--|----------|

LOW BEAM, FOG LIGHT (WHERE APPLICABLE)

893




| | | | | | | | | | | | | | |
|-------------------|----|--------|------|-------|-----|--|--|---|---|--|--|--|-------------------|
| 893 | 12 | 37.5 W | PG13 | T3.25 | 940 | | | 1 | C | | | | Standard |
| H71071192* | 12 | 37.5 W | PG13 | T3.25 | | | | 2 | P | | | | Extreme Yellow XY |
| H71071232* | 12 | 37.5 W | PG13 | T3.25 | | | | 2 | P | | | | Extreme White XB |

Many bulbs of the 800 series are physically interchangeable but not electrically. Serious damage and blinding by glare can result from misuse of the bulb, so it is important to use only the bulb that is specified for each application.

LOW BEAM, FOG LIGHT (WHERE APPLICABLE)

862, 886, 888, 889, 894




| | | | | | | | | | | | | | |
|---------------|----|--------|-------|-------|------|--|--|---|---|--|--|--|---------------|
| 862 | 12 | 37.5 W | PGJ13 | T3.25 | 750 | | | 1 | C | | | | Standard |
| 886 | 12 | 50 W | PGJ13 | T3.25 | 1190 | | | 1 | C | | | | Standard |
| 888 | 12 | 50 W | PGJ13 | T3.25 | 540 | | | 1 | C | | | | Standard |
| 889 | 12 | 27 W | PGJ13 | T3.25 | 540 | | | 1 | C | | | | Standard |
| 889 YL | 12 | 35 W | PGJ13 | T3.25 | | | | 2 | B | | | | Xtreme Yellow |
| 894 | 12 | 37.5 W | PGJ13 | T3.25 | 940 | | | 1 | C | | | | Standard |

Many bulbs of the 800 series are physically interchangeable but not electrically. Serious damage and blinding by glare can result from misuse of the bulb, so it is important to use only the bulb that is specified for each application.

LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE)


9003


HB2





| | | | | | | | | | | | | | |
|---------------------|----|---------|------|--------|----------|------|--|---|---|---|---|---|----------------------|
| 9003 | 12 | 60/55 W | P43t | T4.625 | 1500/910 | | | 1 | C | ■ | | | Standard |
| 9003LL | 12 | 60/55 W | P43t | T4.625 | 1500/910 | | | 1 | C | ■ | | | Long Life |
| ◆ 9003 2.0TB | 12 | 60/55 W | P43t | T4.625 | 1500/910 | 3600 | | 2 | P | ■ | ■ | ■ | High Performance 2.0 |
| ◆ 9003TB | 12 | 60/55 W | P43t | T4.625 | 1500/910 | | | 2 | B | ■ | | | Standard |
| ◆ 9003SB | 12 | 60/55 W | P43t | T4.625 | 1500/910 | | | 1 | B | ■ | | | Standard |

LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE)
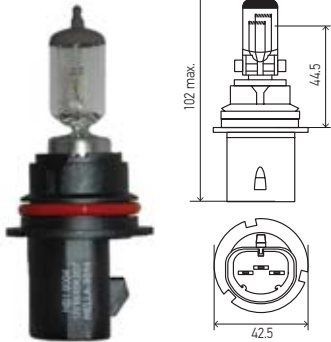
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|------------------|---------|----------|------|--------|------------------------|--------|---------|-----------|-----|-----|---------|----------------------|
| 9004 HB1  | 9004 | 12 | 65/45 W | P29t | T4.625 | 1200/700 | | 1 | C | ■ | | ■ | Standard |
| | 9004P50 | 12 | 65/45 W | P29t | T4.625 | 1250/765 | | 1 | C | ■ | | ■ | + 50 |
| | ◆ 9004P50TB | 12 | 65/45 W | P29t | T4.625 | 1250/765 | | 2 | B | ■ | | ■ | +50 |
| | 9004XE-CB | 12 | 65/45 W | P29t | T4.625 | 1100/700 | 3600 | 1 | C | | | | Clear Blue |
| | 9004XE-100CB | 12 | 100/80 W | P29t | T4.625 | 1250/1100 | 3600 | 1 | C | | | | Clear Blue/High W |
| | 9004 100/80W | 12 | 100/80 W | P29t | T4.625 | 1600/1300 | | 1 | C | | | | High Wattage |
| | ◆ 9004 100/80WSB | 12 | 100/80 W | P29t | T4.625 | 1600/1300 | | 2 | B | | | | High Wattage |
| | ◆ 9004 2.0TB | 12 | 65/45 W | P29t | T4.625 | 1200/700 | 3700 | 2 | P | ■ | | ■ | High Performance 2.0 |
| | 9004LL | 12 | 65/45 W | P29t | T4.625 | 1200/700 | | 1 | C | | | | ■ Long Life |
| | 9004 YL | 12 | 65/45 W | P29t | T4.625 | 1200/700 | 2800 | 2 | B | | | | Xtreme Yellow |
| | H71071392* | 12 | 65/45 W | P29t | T4.625 | | | 2 | P | ■ | | | Extreme White XB |
| | H71070327* | 12 | 100/80 W | P29t | T4.625 | | | 2 | P | | | | Extreme White XB |
| | H71070562* | 12 | 65/45 W | P29t | T4.625 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ 9004TB | 12 | 65/45 W | P29t | T4.625 | 1200/700 | | 2 | B | ■ | | ■ | Standard |
| | ◆ 9004SB | 12 | 65/45 W | P29t | T4.625 | 1200/700 | | 2 | B | ■ | | ■ | Standard |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |

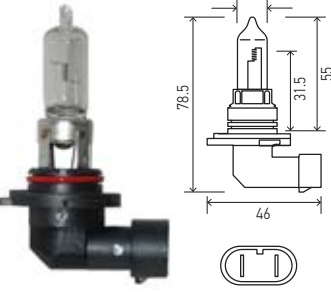
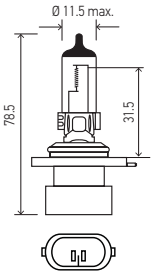

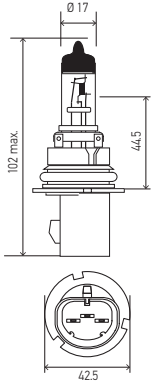

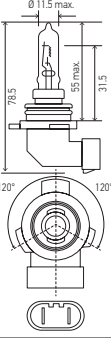



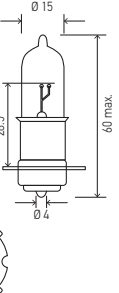
| | | | | | | | | | | | | | |
|--|---|----|-------|------|----|------|------|---|---|---|---|---|----------------------|
| 9005 HB3  | 9005 | 12 | 65 W | P20d | T4 | 1860 | | 1 | C | ■ | ■ | ■ | Standard |
| | 9005P50 | 12 | 65 W | P20d | T4 | 2000 | | 1 | C | ■ | ■ | ■ | + 50 |
| | ◆ 9005P50TB | 12 | 65 W | P20d | T4 | 2000 | | 2 | B | ■ | ■ | ■ | + 50 |
| | 9005XE-100CB | 12 | 100 W | P20d | T4 | 1530 | 3600 | 1 | C | | | | Clear Blue/High W |
| | 9005 100W | 12 | 100 W | P20d | T4 | 2200 | | 1 | C | | | | High Wattage |
| | ◆ 9005 100WSB | 12 | 100 W | P20d | T4 | 2200 | | 2 | B | | | | High Wattage |
| | ◆ 9005 2.0TB | 12 | 65 W | P20d | T4 | 1860 | 3700 | 2 | P | ■ | ■ | ■ | High Performance 2.0 |
| | 9005LL | 12 | 65 W | P20d | T4 | 1860 | | 1 | C | ■ | ■ | ■ | Long Life |
| | 9005 YL | 12 | 65 W | P20d | T4 | 1860 | 2900 | 2 | B | | | | Xtreme Yellow |
| | H71071402* | 12 | 65 W | P20d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71070347* | 12 | 100 W | P20d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71070582* | 12 | 65 W | P20d | T4 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ 9005TB | 12 | 65 W | P20d | T4 | 1860 | | 2 | B | ■ | ■ | ■ | Standard |
| | ◆ 9005SB | 12 | 65 W | P20d | T4 | 1860 | | 1 | B | ■ | ■ | ■ | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
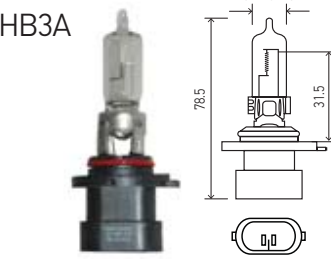
| | | | | | | | | | | | | | |
|--|------------|----|-------|------|----|------|--|---|---|---|---|---|------------------|
| 9005XS HB3A  | 9005XS | 12 | 65 W | P20d | T4 | 1860 | | 1 | C | ■ | ■ | ■ | Standard |
| | H71071412* | 12 | 65 W | P20d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71071422* | 12 | 100 W | P20d | T4 | | | 2 | P | | | | Extreme White XB |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |

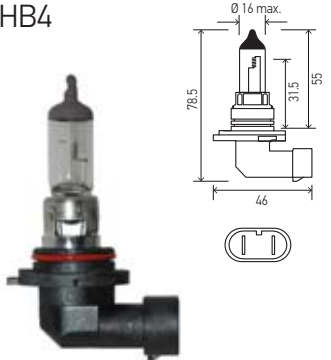




| | | | | | | | | | | | | | |
|---|---|----|------|------|----|------|------|---|---|---|---|---|----------------------|
| 9006 HB4  | 9006 | 12 | 55 W | P22d | T4 | 1095 | | 1 | C | ■ | ■ | ■ | Standard |
| | 9006P50 | 12 | 55 W | P22d | T4 | 1200 | | 1 | C | ■ | ■ | ■ | + 50 |
| | ◆ 9006P50TB | 12 | 55 W | P22d | T4 | 1200 | | 2 | B | ■ | ■ | ■ | + 50 |
| | 9006XE-80CB | 12 | 80 W | P22d | T4 | 1300 | 3600 | 1 | C | | | | Clear Blue/High W |
| | 9006 80W | 12 | 80 W | P22d | T4 | 1650 | | 1 | C | | | | High Wattage |
| | ◆ 9006 80WSB | 12 | 80 W | P22d | T4 | 1650 | | 2 | B | | | | High Wattage |
| | ◆ 9006 2.0TB | 12 | 55 W | P22d | T4 | 1095 | 3700 | 2 | P | ■ | ■ | ■ | High Performance 2.0 |
| | 9006LL | 12 | 55 W | P22d | T4 | 1095 | | 1 | C | ■ | ■ | ■ | Long Life |
| | 9006 YL | 12 | 55 W | P22d | T4 | 1095 | 2900 | 2 | B | | | | Xtreme Yellow |
| | H71071432* | 12 | 55 W | P22d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71070367* | 12 | 80 W | P22d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71070602* | 12 | 55 W | P22d | T4 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ 9006TB | 12 | 55 W | P22d | T4 | 1095 | | 2 | B | ■ | ■ | ■ | Standard |
| | ◆ 9006SB | 12 | 55 W | P22d | T4 | 1095 | | 1 | B | ■ | ■ | ■ | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters

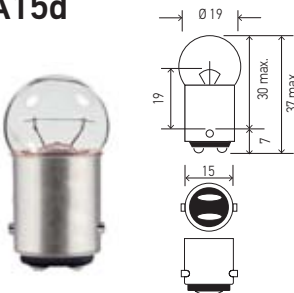
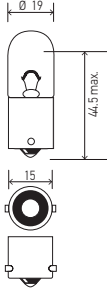
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|--|---|---------|----------|-----------|-----------|------------------------|--------|---------|-----------|-----|-----|----------|----------------------|
| 9006XS HB4A   | 9006XS | 12 | 55 W | P22d | T4 | 1095 | | 1 | C | ■ | ■ | ■ | Standard |
| | H71071442* | 12 | 55 W | P22d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71071452* | 12 | 80 W | P22d | T4 | | | 2 | P | | | | Extreme White XB |
| | H71071462* | 12 | 55 W | P22d | T4 | | | 2 | P | | | | Extreme Yellow XY |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
| 9007 HB5   | 9007 | 12 | 65/55 W | PX29t | T4.625 | 1350/1000 | | 1 | C | ■ | | | Standard |
| | 9007P50 | 12 | 65/55 W | PX29t | T4.625 | 1450/1100 | | 1 | C | ■ | | | + 50 |
| | ◆ 9007P50TB | 12 | 65/55 W | PX29t | T4.625 | 1450/1100 | | 2 | B | ■ | | | + 50 |
| | 9007XE-CB | 12 | 65/55 W | PX29t | T4.625 | 1350/1000 | 3700 | 1 | C | | | | Clear Blue |
| | 9007 100/80W | 12 | 100/80 W | PX29t | T4.625 | 1800/1500 | | 1 | C | | | | High Wattage |
| | ◆ 9007 100/80WSB | 12 | 100/80 W | PX29t | T4.625 | 1800/1500 | | 2 | B | ■ | | | High Wattage |
| | ◆ 9007 2.0TB | 12 | 65/55 W | PX29t | T4.625 | 1350/1000 | 3700 | 2 | P | ■ | | | High Performance 2.0 |
| | 9007LL | 12 | 65/55 W | PX29t | T4.625 | 1350/1000 | | 1 | C | | | | Long Life |
| | 9007 YL | 12 | 65/55 W | PX29t | T4.625 | 1350/1000 | 2800 | 2 | B | | | | Xtreme Yellow |
| | H71071472* | 12 | 65/55 W | PX29t | T4.625 | | | 2 | P | | | | Extreme White XB |
| | H71070387* | 12 | 100/80 W | PX29t | T4.625 | | | 2 | P | | | | Extreme White XB |
| | H71070622* | 12 | 60/55 W | PX29t | T4.625 | | | 2 | P | | | | Extreme Yellow XY |
| | ◆ 9007TB | 12 | 60/55 W | PX29t | T4.625 | 1350/1000 | | 2 | B | | | | Standard |
| ◆ 9007SB | 12 | 60/55 W | PX29t | T4.625 | 1350/1000 | | 1 | B | | | | Standard | |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
| HIR2 9012   | ◆ 9012LL | 12 | 55 W | PX22d | T4 | | | 1 | C | ■ | | | Long Life |
| | LOW BEAM, HIGH BEAM | | | | | | | | | | | | |
| 9009S   | H71071282* | 12 | 35 W | PG20-3 | T4 | | | 2 | P | | | | Extreme White XB |
| | H71071302* | 12 | 35 W | PG20-3 | T4 | | | 2 | P | | | | Extreme Yellow XY |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
| M5   | ◆ M5 35/35W | 12 | 35/35 W | P15d-25-1 | | 840/805 | | 1 | C | | | | Standard |
| | ◆ M5 35/35WTB | 12 | 35/35 W | P15d-25-1 | | 840/805 | | 2 | B | | | | Standard |
| | ◆ M5 35/35WSB | 12 | 35/35 W | P15d-25-1 | | 840/805 | | 1 | B | | | | Standard |
| | ◆ M5 35/35W1 | 12 | 35/35 W | BA20D | | 840/805 | | 1 | C | ■ | | | Standard |
| | ◆ M5 25/25W | 12 | 25/25 W | BA20D | | 540/540 | | 1 | C | ■ | | | Standard |
| | ◆ M5 25/25W1 | 12 | 25/25 W | P15D-25-1 | | 540/540 | | 1 | C | ■ | | | Standard |
| | ◆ M5 18/18W | 12 | 18/18 W | P15D-25-1 | | 440/440 | | 1 | C | ■ | | | Standard |
| | ◆ M5 35/35W3 | 12 | 35/35 W | P15D-25-3 | | 840/805 | | 1 | C | ■ | | | Standard |
| | ◆ M5 25/25W3 | 12 | 25/25 W | P15D-25-3 | | 540/540 | | 1 | C | ■ | | | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |


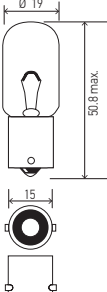
Measures in millimeters


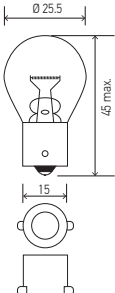
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|--|---------|---------|-------|-------|------------------------|--------|---------|-----------|-----|-----|---------|------------------|
| BA15d  | 90 | 12 | 8 W | BA15d | G6 | 125 | | 10 | C | ■ | | | Standard |
| | 1224 | 32 | 5 W | BA15d | G6 | 125 | | 10 | C | ■ | | | Standard |
| STOP LIGHT, REAR POSITION LIGHT | | | | | | | | | | | | | |
| BA15d  | 1004 | 12 | 12.8 W | BA15d | B6 | | | 10 | C | ■ | | | Standard |
| | PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, TRUNK LIGHT | | | | | | | | | | | | |
| BA15d  | 1176 | 12 | 17/8 W | BA15d | S8 | | | 10 | C | ■ | | | Standard |
| | ◆ 1176A | 12 | 16/8 W | BA15d | S8 | | | 10 | C | ■ | | | Standard (Amber) |
| | ◆ 7240 | 12 | 21/5 W | BA15d | S8 | | | 10 | C | | | | Standard |
| | ◆ 7533 | 12 | 15 W | BA15d | S8 | | | 10 | C | | | | Standard |
| | ◆ 7534 | 24 | 21/5 W | BA15d | S8 | | | 10 | C | | | | Standard |
| | ◆ 7534TB | 24 | 21/5 W | BA15d | S8 | | | 2 | B | | | | Standard |
| STOP LIGHT, REAR POSITION LIGHT | | | | | | | | | | | | | |
| BA15s  | 63 | 6 | 4 W | BA15s | G6 | | | 10 | C | ■ | | | Standard |
| | 631 | 12 | 9 W | BA15s | G6 | | | 10 | C | ■ | | | Standard |
| | 67 | 12 | 8 W | BA15s | G6 | | | 10 | C | ■ | | | Standard |
| | 89 | 12 | 8 W | BA15s | G6 | | | 10 | C | ■ | | | Standard |
| | ◆ 97 | 12 | 9 W | BA15s | G6 | | | 10 | C | ■ | | | Standard |
| PARKING LIGHT, LICENSE PLATE LIGHT | | | | | | | | | | | | | |
| BA15s  | 5007 | 12 | 5 W | BA15s | B6 | | | 10 | C | ■ | ■ | | Standard |
| | ◆ 5007TB | 12 | 5 W | BA15s | B6 | | | 2 | B | | ■ | ■ | Standard |
| | ◆ 5007SB | 12 | 5 W | BA15s | B6 | | | 1 | B | | ■ | ■ | Standard |
| | 5008 | 12 | 10 W | BA15s | B6 | | | 10 | C | | ■ | ■ | Standard |
| | ◆ 5008TB | 12 | 10 W | BA15s | B6 | | | 2 | B | | ■ | ■ | Standard |
| | ◆ 5008SB | 12 | 10 W | BA15s | B6 | | | 1 | B | | ■ | ■ | Standard |
| | 5627 | 24 | 5 W | BA15s | B6 | | | 10 | C | | ■ | ■ | Standard |
| | ◆ 5627SB | 24 | 5 W | BA15s | B6 | | | 1 | B | | ■ | ■ | Standard |
| | ◆ 5627TB | 24 | 5 W | BA15s | B6 | | | 2 | B | | ■ | ■ | Standard |
| | ◆ 5637 | 24 | 10 W | BA15s | B6 | | | 10 | C | | ■ | ■ | Standard |
| | 5637TB | 24 | 10 W | BA15s | B6 | | | 2 | B | | ■ | ■ | Standard |
| | 5637HD | 24 | 10 W | BA15s | B6 | | | 10 | C | | ■ | ■ | Heavy Duty |
| | PARKING LIGHT, LICENSE PLATE LIGHT | | | | | | | | | | | | |


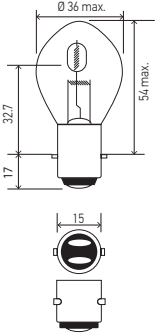
C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters


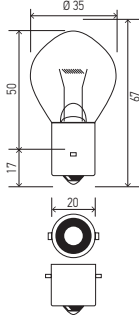



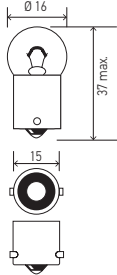

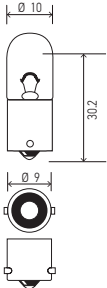

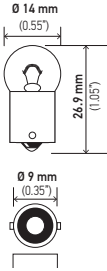
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|-------------|---------|---------|-------|-------|------------------------|--------|---------|-----------|-----|-----|---------|-----------|
| BA15s   | 1003 | 12 | 12 W | BA15s | B6 | | | 10 | C | ■ | | | Standard |
| | 1003LL | 12 | 12 W | BA15s | B6 | | | 10 | C | ■ | | | Long Life |
| | 1308 | 24 | 16 W | BA15s | B6 | | | | | ■ | | | Standard |
| PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, TRUNK LIGHT | | | | | | | | | | | | | |

| | | | | | | | | | | | | | |
|--|--|----|------|-------|----|--|--|----|---|---|--|--|----------|
| BA15s   | 3497 | 12 | 25 W | BA15s | T6 | | | 10 | C | ■ | | | Standard |
| | PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, TRUNK LIGHT | | | | | | | | | | | | |

| | | | | | | | | | | | | | |
|--|--------------|------|-------|-------|----|--|----|----|---|---|---|-----------------------|-----------------------|
| BA15s P21W PY21W   | 93 | 12 | 13 W | BA15s | S8 | | | 10 | C | ■ | | | Standard |
| | 199 | 12 | 29 W | BA15s | S8 | | | 10 | C | ■ | | | Standard (35 MSCP) |
| | 1073 | 12 | 23 W | BA15s | S8 | | | 10 | C | ■ | | | Standard |
| | 1141 | 12 | 18 W | BA15s | S8 | | | 10 | C | ■ | | | Standard |
| | ◆ 1141TB | 12 | 18 W | BA15s | S8 | | | 2 | B | ■ | | | Standard |
| | ◆ 1141 24V | 24 | 18 W | BA15s | S8 | | | 10 | C | ■ | | | Standard |
| | ◆ 1141 24VSB | 24 | 18 W | BA15s | S8 | | | 1 | B | | | | Standard |
| | ◆ 1141 24VTB | 24 | 18 W | BA15s | S8 | | | 2 | B | | | | Standard |
| | 1141LL | 12 | 18 W | BA15s | S8 | | | 10 | C | ■ | | | Long Life |
| | 1156 | 12 | 27 W | BA15s | S8 | | | 10 | C | ■ | | | Standard |
| | 1156LL | 12 | 27 W | BA15s | S8 | | | 10 | C | ■ | | | Long Life |
| | 1156NA | 12 | 27 W | BA15s | S8 | | | 10 | C | ■ | | | Standard (Nat. amber) |
| | 1683 | 24 | 29 W | BA15s | S8 | | | 10 | C | ■ | | | Standard |
| | 2396 | 12 | 29 W | BA15s | S8 | | | 10 | C | ■ | | | Standard (40 MSCP) |
| | 7506A | 12 | 21 W | BA15s | S8 | | | 10 | C | | | ■ | Standard (Amber) |
| | ◆ 7506 | 12 | 21 W | BA15s | S8 | | | 10 | C | | ■ | | Standard |
| | ◆ 7506TB | 12 | 21 W | BA15s | S8 | | | 2 | B | | ■ | ■ | Standard |
| | 7506ATB | 12 | 21 W | BA15s | S8 | | | 2 | B | | ■ | ■ | Standard |
| | ◆ 7511 | 24 | 21 W | BA15s | S8 | | | 10 | C | | ■ | ■ | Standard |
| | ◆ 7511TB | 24 | 21 W | BA15s | S8 | | | 2 | B | | ■ | ■ | Standard |
| 7511SB | 24 | 21 W | BA15s | S8 | | | 1 | B | | ■ | ■ | Standard | |
| 7506NA | 12 | 21 W | BA15s | S8 | | | 10 | C | | | | Standard (Nat. amber) | |
| FLASHING LIGHT, STOP LIGHT, REAR FOG LIGHT, REVERSE LIGHT, SIGNAL LIGHT | | | | | | | | | | | | | |


| | | | | | | | | | | | | | |
|---|----------|----|---------|-------|-----|--|--|---|---|--|---|--|--------------------|
| BA20d S2   | 6235 | 12 | 35/35 W | BA20d | B11 | | | 1 | C | | ■ | | Standard |
| | ◆ 6235SB | 12 | 35/35 W | BA20d | B11 | | | 1 | B | | | | Standard |
| | 6245 | 12 | 45/40 W | BA20d | B11 | | | 1 | C | | | | Standard |
| | 6260 | 12 | 60/60 W | BA20d | B11 | | | 1 | C | | | | Standard (High W.) |
| LOW BEAM, HIGH BEAM | | | | | | | | | | | | | |


Measures in millimeters


| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|---------------|---------|---------|-------|-------|------------------------|--------|---------|-----------|-----|-----|---------|--------------------|
|   | 660 | 12 | 60 W | BA20s | B11 | | | 1 | C | | | | Standard (High W.) |
| | 635 | 12 | 35 W | BA20s | B11 | | | 1 | C | | | | Standard |
| LOW BEAM, HIGH BEAM | | | | | | | | | | | | | |
|   | 3799 | 6 | 1 W | BA7s | T2 | | | 10 | C | | | | Standard |
| | 3898 | 12 | 2 W | BA7s | T2 | | | 10 | C | | | | Standard |
| | 3898TB | 12 | 2 W | BA7s | T2 | | | 2 | B | | | | Standard |
| | 3899 | 24 | 3 W | BA7s | T2 | | | 10 | C | | | | Standard |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 51 | 6 | 12 W | BA9s | G3.5 | | | 10 | C | ■ | | | Standard |
| | 53 | 12 | 2 W | BA9s | G3.5 | | | 10 | C | ■ | | | Standard |
| | 53TB | 12 | 2 W | BA9s | G3.5 | | | 2 | B | | | | Standard |
| | 57 | 12 | 3 W | BA9s | G4.5 | | | 10 | C | ■ | | ■ | Standard |
| | 265 | 24 | 2 W | BA9s | G3.5 | | | 10 | C | ■ | | | Standard |
| | 1445 | 12 | 2 W | BA9s | G3.5 | | | 10 | C | ■ | | | Standard |
| PARKING LIGHT, DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 1816 | 12 | 4 W | BA9s | T3.25 | | | 10 | C | ■ | | | Standard |
| | 1891 | 12 | 3 W | BA9s | T3.25 | | | 10 | C | ■ | | | Standard |
| | 1893 | 12 | 5 W | BA9s | T3.25 | | | 10 | C | ■ | | | Standard |
| PARKING LIGHT | | | | | | | | | | | | | |
|   | 1895 | 12 | 4 W | BA9s | G4.5 | | | 10 | C | ■ | | | Standard |
| PARKING LIGHT, DASHBOARD LIGHT | | | | | | | | | | | | | |


C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product


Measures in millimeters

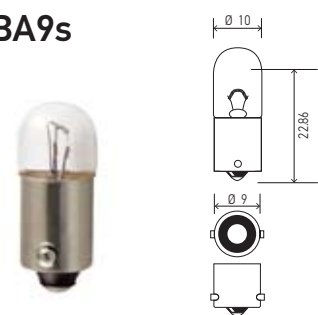
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|--|-------------|---------|---------|------|-------|------------------------|--------|---------|-----------|-----|-----|---------|----------|
| BA9s  | 3796 | 12 | 2 W | BA9s | T2.75 | | | 10 | C | | | ■ | Standard |
| | 3797 | 24 | 2 W | BA9s | T2.75 | | | 10 | C | | | | Standard |
| | ◆ 3797TB | 24 | 2 W | BA9s | T2.75 | | | 2 | B | | | | Standard |
| | 3893 | 12 | 4 W | BA9s | T2.75 | | | 10 | C | ■ | ■ | | Standard |
| | 3893TB | 12 | 4 W | BA9s | T2.75 | | | 2 | B | ■ | ■ | | Standard |
| | ◆ 3893SB | 12 | 4 W | BA9s | T2.75 | | | 1 | B | ■ | ■ | | Standard |
| | 3930 | 24 | 4 W | BA9s | T2.75 | | | 10 | C | ■ | ■ | | Standard |
| | ◆ 3930TB | 24 | 4 W | BA9s | T2.75 | | | 2 | B | ■ | ■ | | Standard |
| PARKING LIGHT | | | | | | | | | | | | | |


| | | | | | | | | | | | | | |
|--|--|----|------|--------|----|--|--|----|---|--|---|---|------------------|
| BAU15s P21W PY21W  | 7507C | 12 | 21 W | BAU15s | S8 | | | 10 | C | | | | Standard |
| | ◆ 7507CTB | 12 | 21 W | BAU15s | S8 | | | 2 | B | | | | Standard |
| | 7507 | 12 | 21 W | BAU15s | S8 | | | 10 | C | | ■ | ■ | Standard |
| | ◆ 7507TB | 12 | 21 W | BAU15s | S8 | | | 2 | B | | ■ | ■ | Standard |
| | 7510LTS | 24 | 21 W | BAU15s | S8 | | | 10 | C | | | | Heavy Duty |
| | ◆ 7510LTSTB | 24 | 21 W | BAU15s | S8 | | | 2 | B | | | | Standard |
| | 9507 | 24 | 21 W | BAU15s | S8 | | | 10 | C | | ■ | ■ | Standard (Amber) |
| | ◆ 9507TB | 24 | 21 W | BAU15s | S8 | | | 2 | B | | ■ | ■ | Standard (Amber) |
| | ◆ 5009 | 12 | 10 W | BAU15s | S8 | | | 10 | C | | | | Standard |
| | FLASHING LIGHT AND FRONT, REAR SIDE SIGNAL LIGHT | | | | | | | | | | | | |

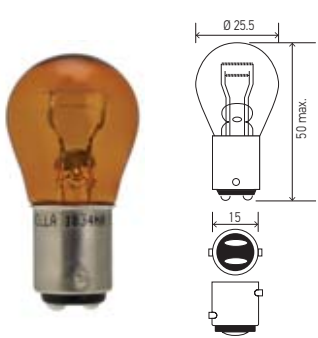
| | | | | | | | | | | | | | | |
|--|---------------------------------|----|---------|--------|----|--|--|----|---|---|--|--|------------------------|--|
| BAY15d  | 198HD | 12 | 29/10 W | BAY15d | S8 | | | 10 | C | ■ | | | Heavy Duty | |
| | 1034 | 12 | 23/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard | |
| | 1034A | 12 | 23/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard (Amber) | |
| | 1034NA | 12 | 23/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard (Nat. amber) | |
| | ◆ 1034TB | 12 | 23/8 W | BAY15d | S8 | | | 2 | B | ■ | | | Standard | |
| | 1157 | 12 | 27/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard | |
| | ◆ 1157TB | 12 | 27/8 W | BAY15d | S8 | | | 2 | B | ■ | | | Standard | |
| | 1157LL | 12 | 27/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Long Life | |
| | ◆ 1157A | 12 | 27/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard | |
| | 1157NA | 12 | 27/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard (Nat. amber) | |
| | 2057 | 12 | 27/7 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard | |
| | 2057LL | 12 | 27/7 W | BAY15d | S8 | | | 10 | C | ■ | | | Long Life | |
| | 2057NA | 12 | 27/7 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard (Nat. amber) | |
| | 2057NALL | 12 | 27/7 W | BAY15d | S8 | | | 10 | C | ■ | | | Long Life (Nat. amber) | |
| | 2357 | 12 | 29/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard | |
| | 2357LL | 12 | 29/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Long Life | |
| | 2357NA | 12 | 29/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard (Nat. amber) | |
| | 2397 | 12 | 29/8 W | BAY15d | S8 | | | 10 | C | ■ | | | Standard | |
| | STOP LIGHT, REAR POSITION LIGHT | | | | | | | | | | | | | |

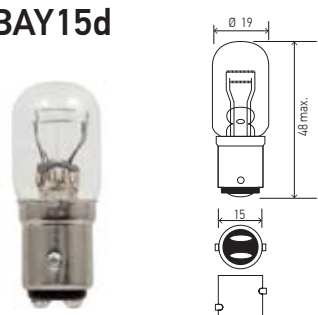
| | | | | | | | | | | | | | |
|--|---|----|--------|--------|----|--|--|----|---|---|--|--|----------|
| BAY15d  | 3496 | 12 | 27/8 W | BAY15d | T6 | | | 10 | C | ■ | | | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
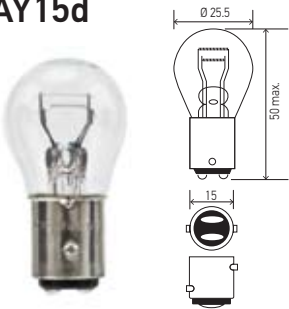
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|--|---------------------------------|---------|---------|--------|-------|------------------------|--------|---------|-----------|-----|-----|---------|----------|
| BAY15d  | 7528 | 12 | 21/5 W | BAY15d | S8 | | | 10 | C | ■ | ■ | | Standard |
| | 7537 | 24 | 21/5 W | BAY15d | S8 | | | 10 | C | | | | Standard |
| | ◆ 7537SB | 24 | 21/5 W | BAY15d | S8 | | | 1 | B | ■ | ■ | | Standard |
| | ◆ 7537TB | 24 | 21/5 W | BAY15d | S8 | | | 2 | B | | | | Standard |
| | 7528TB | 12 | 21/5 W | BAY15d | S8 | | | 2 | B | | | | Standard |
| | 7528SB | 12 | 21/5 W | BAY15d | S8 | | | 1 | B | | | | Standard |
| | STOP LIGHT, REAR POSITION LIGHT | | | | | | | | | | | | |
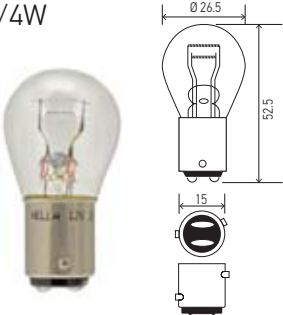
| | | | | | | | | | | | | | |
|---|-----------------|----|--------|--------|----|--|--|----|---|---|---|--|----------|
| BAZ15d P21/4W  | 7225 | 12 | 21/4 W | BAZ15d | S8 | | | 10 | C | ■ | ■ | | Standard |
| | ◆ 7225TB | 12 | 21/4 W | BAZ15d | S8 | | | 2 | B | ■ | ■ | | Standard |
| POSITION LIGHT, REAR FOG LIGHT, STOP LIGHT | | | | | | | | | | | | | |

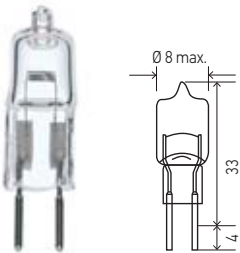
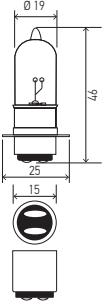





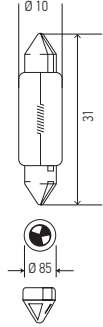

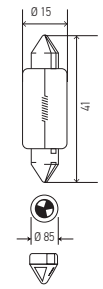
| | | | | | | | | | | | | | |
|--|---|----|------|----|----|--|--|----|---|--|--|--|----------|
| G4  | JC20 | 12 | 20 W | G4 | T3 | | | 10 | C | | | | Standard |
| | JC5 | 12 | 5 W | G4 | T3 | | | 10 | C | | | | Standard |
| | JC10 | 12 | 10 W | G4 | T3 | | | 10 | C | | | | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |
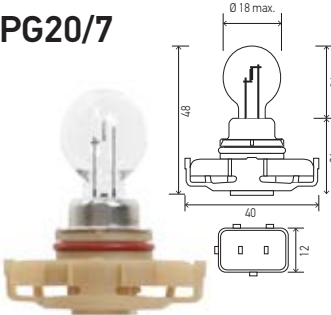
| | | | | | | | | | | | | | |
|--|---|----|------|--------|----|--|--|---|---|---|--|--|----------|
| PG20/7  | ◆ PSX24W | 12 | 24 W | PG20/7 | S8 | | | 1 | C | ■ | | | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |

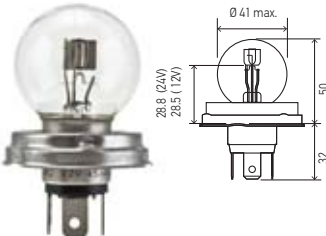

| | | | | | | | | | | | | | |
|--|---|----|---------|------|-----|--|--|----|---|---|---|---|----------|
| P45t R2  | 7951 | 12 | 45/40 W | P45t | S13 | | | 10 | C | ■ | ■ | | Standard |
| | 7951 55/50W | 12 | 55/50 W | P45t | S13 | | | 10 | C | | | | Standard |
| | 7952 | 24 | 55/50 W | P45t | S13 | | | 10 | C | | | ■ | Standard |
| | ◆ 7952TB | 24 | 55/50 W | P45t | S13 | | | 2 | B | | | ■ | Standard |
| | LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | |



C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters


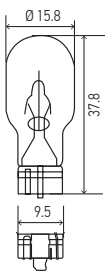
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|----------------|---------|---------|---------|--------|------------------------|--------|---------|-----------|-----|-----|---------|--------------------|
| PX15d   | A3603 | 12 | 25/25 W | PX15d | T6 | | | 1 | C | | | | Standard |
| | A3625 | 6 | 25/25 W | PX15d | T6 | | | 1 | C | | | | Standard |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | |
| SV7-8   | DE3021 | 12 | 3 W | SV7-8 | T2.25 | | | 10 | C | ■ | | | Standard (8x29mm) |
| | ◆ DE3021TB | 12 | 3 W | SV7-8 | T2.25 | | | 2 | B | ■ | | | Standard (8x29mm) |
| | ◆ DE3021SB | 12 | 3 W | SV7-8 | T2.25 | | | 1 | B | ■ | | | Standard (8x29mm) |
| | DE3022 | 12 | 5 W | SV7-8 | T2.25 | | | 10 | C | ■ | | | Standard (8x29mm) |
| PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, INTERIOR LIGHT, TRUNK LIGHT | | | | | | | | | | | | | |
| SV7-8   | 6428 | 12 | 3 W | SV7-8 | T2.5 | | | 10 | C | | | | Standard (8x28mm) |
| | 6430 | 24 | 3 W | SV7-8 | T2.5 | | | 10 | C | | | | Standard (8x29mm) |
| | 6438 | 12 | 10 W | SV7-8 | T2.5 | | | 10 | C | | | | Standard (8x31mm) |
| PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, INTERIOR LIGHT, TRUNK LIGHT | | | | | | | | | | | | | |
| SV8.5-8   | DE3175 | 12 | 10 W | SV8.5-8 | T3.25 | | | 10 | C | ■ | | | Standard (10x31mm) |
| | ◆ DE3175TB | 12 | 10 W | SV8.5-8 | T3.25 | | | 2 | B | ■ | | | Standard (10x31mm) |
| | ◆ DE3175SB | 12 | 10 W | SV8.5-8 | T3.25 | | | 1 | B | ■ | | | Standard (10x31mm) |
| | DE3425 | 12 | 10 W | SV8.5-8 | T3.25 | | | 10 | C | ■ | | | Standard (13x37mm) |
| | 6411 | 12 | 10 W | SV8.5-8 | T3.25 | | | 10 | C | | | | Standard (10x41mm) |
| | ◆ 6411TB | 12 | 10 W | SV8.5-8 | T3.25 | | | 2 | B | | | | Standard (10x41mm) |
| | ◆ 6411LED 6.5K | 12 | 1 W | SV8.5-8 | T3.25 | | | 1 | B | | | | LED |
| | ◆ 6411LED 5K | 12 | 1 W | SV8.5-8 | T3.25 | | | 1 | B | | | | LED |
| | 6418 | 12 | 5 W | SV8.5-8 | T3.25 | | | 10 | C | | ■ | ■ | Standard (10x35mm) |
| | ◆ 6418TB | 12 | 5 W | SV8.5-8 | T3.25 | | | 2 | B | | ■ | ■ | Standard (10x35mm) |
| | ◆ 6418LED 6.5K | 12 | 1 W | SV8.5-8 | T3.25 | | | 1 | B | | | | LED |
| | ◆ 6418LED 5K | 12 | 1 W | SV8.5-8 | T3.25 | | | 1 | B | | | | LED |
| | 6423 | 24 | 5 W | SV8.5-8 | T3.25 | | | 10 | C | | ■ | ■ | Standard (10x35mm) |
| | ◆ 6423TB | 24 | 5 W | SV8.5-8 | T3.25 | | | 2 | B | | ■ | ■ | Standard (10x35mm) |
| | 6429 | 24 | 10 W | SV8.5-8 | T3.25 | | | 10 | C | | | | Standard (11x41mm) |
| | ◆ 6429TB | 24 | 10 W | SV8.5-8 | T3.25 | | | 2 | B | | | | Standard (11x41mm) |
| PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, INTERIOR LIGHT, TRUNK LIGHT | | | | | | | | | | | | | |
| SV8.5-8   | 6451 | 12 | 15 W | SV8.5-8 | T4.625 | | | 10 | C | | | | Standard (15x44mm) |
| | 6453 | 24 | 15 W | SV8.5-8 | T4.625 | | | 10 | C | | | | Standard (15x44mm) |
| | 6475 | 12 | 18 W | SV8.5-8 | T4.625 | | | 10 | C | | | | Standard (15x41mm) |
| | 6476 | 12 | 21 W | SV8.5-8 | T4.75 | | | 10 | C | | ■ | | Standard (15x43mm) |
| | 6480 | 24 | 18 W | SV8.5-8 | T4.625 | | | 10 | C | | | | Standard (15x43mm) |
| PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, INTERIOR LIGHT, TRUNK LIGHT | | | | | | | | | | | | | |

Measures in millimeters

| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|--|-------------|---------|---------|---------|-------|------------------------|--------|---------|-----------|-----|-----|---------|--------------------|
| SV8.5-8 C5W   | 6413 | 12 | 5 W | SV8.5-8 | T3.25 | | | 10 | C | | | | Standard (11x41mm) |
| | 6424 | 24 | 5 W | SV8.5-8 | T3.25 | | | 10 | C | | | | Standard (11x41mm) |
| PARKING LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, INTERIOR LIGHT, TRUNK LIGHT | | | | | | | | | | | | | |






| | | | | | | | | | | | | | |
|---|---------------|----|-------|-----------|-------|--|--|----|---|---|---|--|----------|
| W2.1x4.9d   | 17 | 24 | 2 W | W2.1x4.9d | T1.75 | | | 10 | C | ■ | | | Standard |
| | 73 | 12 | 1.1 W | W2.1x4.9d | T1.75 | | | 10 | C | ■ | | | Standard |
| | ◆ 73TB | 12 | 1.1 W | W2.1x4.9d | T1.75 | | | 2 | B | ■ | | | Standard |
| | 74 | 12 | 1.4 W | W2.1x4.9d | T1.75 | | | 10 | C | ■ | ■ | | Standard |
| DASHBOARD LIGHT | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | |
|---|-----------------|----|-----|-----------|-------|--|--|----|---|---|--|--|-----------------------|--|
| W2.1x9.5d   | 158 | 12 | 3 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard | |
| | 158A | 12 | 3 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard (Amber) | |
| | ◆ 158TB | 12 | 3 W | W2.1x9.5d | T3.25 | | | 2 | B | ■ | | | Standard | |
| | 168 | 12 | 5 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard | |
| | ◆ 168TB | 12 | 5 W | W2.1x9.5d | T3.25 | | | 2 | B | ■ | | | Standard | |
| | 194 | 12 | 4 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard | |
| | 194B | 12 | 4 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard (Blue) | |
| | 194NA | 12 | 4 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard (Nat. amber) | |
| | 194R | 12 | 4 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard (Red) | |
| | 400 | 24 | 3 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard | |
| | ◆ 2840 | 24 | 2 W | W2.1x9.5d | T3.25 | | | 10 | C | ■ | | | Standard | |
| | DASHBOARD LIGHT | | | | | | | | | | | | | |


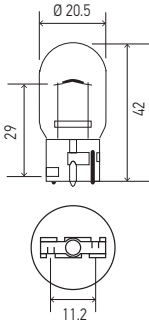

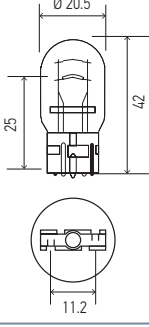

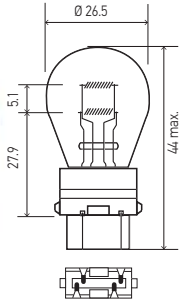






| | | | | | | | | | | | | | |
|---|----------------------|----|------|-----------|----|--|--|----|---|---|---|--|----------|
| W2.1x9.5d   | 912 | 12 | 13 W | W2.1x9.5d | T5 | | | 10 | C | ■ | | | Standard |
| | 921 | 12 | 16 W | W2.1x9.5d | T5 | | | 10 | C | ■ | ■ | | Standard |
| | ◆ 921NA | 12 | 18 W | W2.1x9.5d | T5 | | | 10 | C | ■ | ■ | | Standard |
| | ◆ 921TB | 12 | 16 W | W2.1x9.5d | T5 | | | 2 | B | ■ | ■ | | Standard |
| | ◆ 921SB | 12 | 16 W | W2.1x9.5d | T5 | | | 1 | B | ■ | ■ | | Standard |
| | ◆ 921LED 6.5K | 12 | 1 W | W2.1x9.5d | T5 | | | 2 | B | | | | LED |
| | ◆ 921LED 5K | 12 | 1 W | W2.1x9.5d | T5 | | | 2 | B | | | | LED |
| PARKING LIGHT | | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters

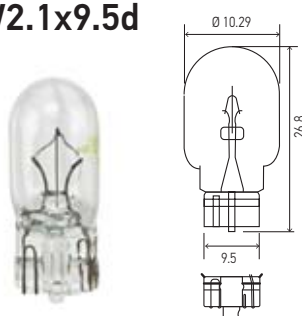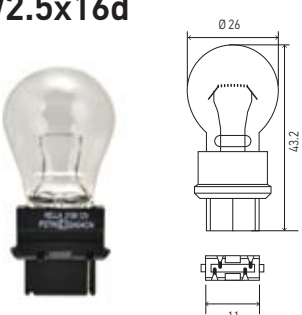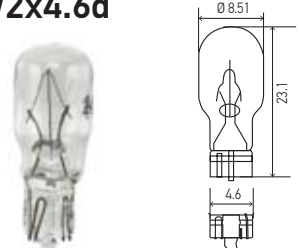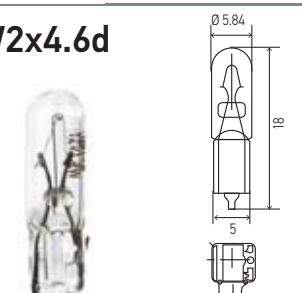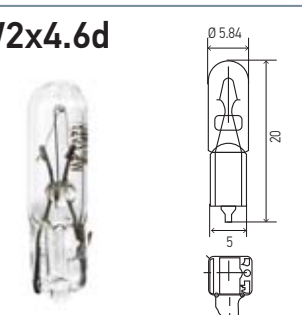













| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features | |
|---|---|---------|---------|-----------|----------|------------------------|--------|---------|-----------|-----|-----|---------|-----------------------|----------|
| W2.1x9.5d  | 2820 | 12 | 2 W | W2.1x9.5d | T3.25 | | | 10 | C | | | | Standard | |
| | 2821 | 12 | 3 W | W2.1x9.5d | T3.25 | | | 10 | C | | ■ | ■ | Standard | |
| | ◆ 2821TB | 12 | 3 W | W2.1x9.5d | T3.25 | | | 2 | B | | ■ | ■ | Standard | |
| | ◆ 2821SB | 12 | 3 W | W2.1x9.5d | T3.25 | | | 1 | B | | ■ | ■ | Standard | |
| | 2825 | 12 | 5 W | W2.1x9.5d | T3.25 | | | 10 | C | | ■ | ■ | Standard | |
| | 2825BL | 12 | 5 W | W2.1x9.5d | T3.25 | | | 10 | C | | | | Standard (Blue) | |
| | ◆ 2825TB | 12 | 5 W | W2.1x9.5d | T3.25 | | | 2 | B | | | | Standard | |
| | ◆ 2825SB | 12 | 5 W | W2.1x9.5d | T3.25 | | | 1 | B | | ■ | | Standard | |
| | 2827NA | 12 | 5 W | W2.1x9.5d | T3.25 | | | 10 | C | | ■ | ■ | Standard (Nat. amber) | |
| | ◆ 2827NATB | 12 | 5 W | W2.1x9.5d | T3.25 | | | 2 | B | | ■ | ■ | Standard | |
| | 2841 | 24 | 3 W | W2.1x9.5d | T3.25 | | | 10 | C | | ■ | ■ | Standard | |
| | ◆ 2841TB | 24 | 3W | W2.1x9.5d | T3.25 | | | 2 | B | | ■ | ■ | Standard | |
| | 2845 | 24 | 5 W | W2.1x9.5d | T3.25 | | | 10 | C | | | | Standard | |
| | ◆ 2845SB | 24 | 5 W | W2.1x9.5d | T3.25 | | | 1 | B | | ■ | ■ | Standard | |
| | ◆ 2845TB | 24 | 5 W | W2.1x9.5d | T3.25 | | | 2 | B | | ■ | ■ | Standard | |
| | 3652 | 12 | 5 W | W2.1x9.5d | T3.25 | | | 10 | C | | | | Standard | |
| | PARKING LIGHT, DASHBOARD LIGHT, LICENSE PLATE LIGHT, GLOVE COMPARTMENT LIGHT, FLASHING LIGHT ADDITIONAL, INTERIOR LIGHT | | | | | | | | | | | | | |
| | W2.5x16d  | 3156 | 12 | 27 W | W2.5x16d | S8 | | | 10 | C | ■ | ■ | | Standard |
| 3047 | | 12 | 21/7 W | W2.5X16q | S8 | | | 10 | C | ■ | | | Standard | |
| 3047LL | | 12 | 21/7 W | W2.5X16q | S8 | | | 10 | C | ■ | | | Long Life | |
| 3057 | | 12 | 27/7 W | W2.5x16q | S8 | | | 10 | C | ■ | | | Standard | |
| 3157 | | 12 | 27/7 W | W2.5x16q | S8 | | | 10 | C | ■ | | | Standard | |
| 3157LL | | 12 | 27/7 W | W2.5x16q | S8 | | | 10 | C | ■ | ■ | | Long Life | |
| ◆ 3157TB | | 12 | 27/7 W | W2.5x16q | S8 | | | 2 | B | | ■ | | Standard | |
| 3157NA | | 12 | 27/7 W | W2.5x16q | S8 | | | 10 | C | | ■ | | Standard (Nat. amber) | |
| 3457 | | 12 | 29/8 W | W2.5x16q | S8 | | | 10 | C | | ■ | | Standard | |
| 3457NA | | 12 | 29/8 W | W2.5x16q | S8 | | | 10 | C | | ■ | | Standard (Nat. amber) | |
| FLASHING LIGHT, REAR SIGNAL LIGHT | | | | | | | | | | | | | | |
| W2x4.6d  | 24 | 12 | 3 W | W2x4.6d | T2.75 | | | 10 | C | ■ | | | Standard | |
| | 24NA | 12 | 3 W | W2x4.6d | T2.75 | | | 10 | C | ■ | | | Standard (Nat. amber) | |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | | |
| W2x4.6d  | 37 | 12 | 1.3 W | W2X4.6d | T1.75 | | | 10 | C | ■ | | | Standard | |
| LOW BEAM, HIGH BEAM, FOG LIGHT (WHERE APPLICABLE) | | | | | | | | | | | | | | |
| W2x4.6d  | 2721 | 12 | 1.2 W | W2x4.6d | T1.5 | | | 10 | C | ■ | | ■ | Standard | |
| | ◆ 2721TB | 12 | 1.2 W | W2x4.6d | T1.5 | | | 2 | B | | ■ | | Standard | |
| | ◆ 2722 | 12 | 21 W | W2x4.6d | T1.5 | | | 10 | C | | | ■ | Standard | |
| | 2723 | 12 | 2.3 W | W2x4.6d | T1.5 | | | 10 | C | | ■ | | Standard | |
| | 2741 | 24 | 1.2 W | W2x4.6d | T1.5 | | | 10 | C | | | | Standard | |
| | ◆ 2741TB | 24 | 1.2 W | W2x4.6d | T1.5 | | | 2 | B | | | | Standard | |
| DASHBOARD LIGHT | | | | | | | | | | | | | | |

Measures in millimeters









| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|---|---------|---------|----------|-------|------------------------|--------|---------|-----------|-----|-----|---------|-----------------------|
| W3x16d   | 7440 | 12 | 21 W | W3x16d | T6.5 | | | 10 | C | ■ | ■ | ■ | Standard |
| | 7440LL | 12 | 21 W | W3x16d | T6.5 | | | 10 | C | ■ | ■ | ■ | Long Life |
| | 7440NA | 12 | 21 W | W3x16d | T6.5 | | | 10 | C | ■ | ■ | | Standard (Nat. amber) |
| | 7440TB | 12 | 21 W | W3x16d | T6.5 | | | 2 | B | ■ | | | Standard |
| | 7441 | 12 | 27 W | W3x16d | T6.5 | | | 10 | C | ■ | | | Standard |
| | REAR POSITION LIGHT, STOP LIGHT | | | | | | | | | | | | |
| W3x16d   | 7443 | 12 | 21/5 W | W3x16d | T6.5 | | | 10 | C | ■ | ■ | ■ | Standard |
| | 7443LL | 12 | 21/5 W | W3x16d | T6.5 | | | 10 | C | ■ | ■ | ■ | Long Life |
| | 7443A | 12 | 21/5 W | W3x16d | T6.5 | | | 10 | C | ■ | | | Standard (Amber) |
| | 7443NA | 12 | 21/5 W | W3x16d | T6.5 | | | 10 | C | ■ | | | Standard (Nat. amber) |
| | 7443TB | 12 | 21/5 W | W3x16d | T6.5 | | | 2 | B | ■ | ■ | ■ | Standard |
| | FLASHING LIGHT AND REAR SIGNAL LIGHT, ADDITIONAL FLASHING LIGHT, STOP LIGHT | | | | | | | | | | | | |
| W2.5x16q   | 3757A | 12 | 27/7 W | W2.5x16q | S8 | | | 10 | C | ■ | | | Standard (Amber) |
| | FLASHING LIGHT AND REAR SIGNAL LIGHT, STOP LIGHT | | | | | | | | | | | | |
| B10d   | 007997101 | 12 | 3 W | B10d | | | | 10 | C | | | | Brown base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B10d   | 007997111 | 12 | 5 W | B10d | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.3d   | 007997061 | 24 | 1.2 W | B8.3d | | | | 10 | C | | | | Grey base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |


C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters














| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|------------------|---------|---------|-------|-------|------------------------|--------|---------|-----------|-----|-----|---------|------------|
| B8.3d   | 007997001 | 12 | 2 W | B8.3d | | | | 10 | C | | | | White base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.5d   | 007997031 | 12 | 1.2 W | B8.5d | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.3d   | 007997041 | 12 | 1.2 W | B8.3d | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.5d   | 007997071 | 24 | 1.2 W | B8.5d | | | | 10 | C | | | | Grey base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.5d   | 007997081 | 12 | 2 W | B8.5d | | | | 10 | C | | | | Green base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.7d   | 007997051 | 12 | 2 W | B8.7d | | | | 10 | C | | | | Grey base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| B8.7d   | 007997091 | 12 | 2 W | B8.7d | | | | 10 | C | | | | Green base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |

Measures in millimeters







| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|--|-----------------|---------|---------|------------|-------|------------------------|--------|---------|-----------|-----|-----|---------|-------------|
| BG8.5-5.5d  | 007997231 | 12 | 1.2 W | BG8.5-5.5d | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| BG8-5.5d  | 007997241 | 12 | 1.2 W | BG8-5.5d | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| BG8.5-S/40  | 007997251 | 12 | 1.2 W | BG8.5-S/40 | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| BX8.4d   | 007997121 | 12 | 1.2 W | BX8.4d | | | | 10 | C | | | | Black base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| BX8.4d   | 007997131 | 12 | 1.5 W | BX8.4d | | | | 10 | C | | | | Green base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| BX8.4d   | 007997141 | 12 | 1.5 W | BX8.4d | | | | 10 | C | | | | Beige base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| BX8.4d   | 007997171 | 12 | 1.1 W | BX8.4d | | | | 10 | C | | | | Orange base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range  = New Product

Measures in millimeters

| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|-------------|---------|---------|---------|-------|------------------------|--------|---------|-----------|-----|-----|---------|------------------|
|   | 007997151 | 12 | 0.36 W | BX8.5d | | | | 10 | C | | | | Violet base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 007997161 | 12 | 1.5 W | BX8.5d | | | | 10 | C | | | | Beige base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 007997211 | 12 | 1.2 W | BX8.5d | | | | 10 | C | | | | Blue base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 007997221 | 12 | 2 W | BX8.5d | | | | 10 | C | | | | Light Green base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 007997261 | 24 | 1.2 W | BX8.5d | | | | 10 | C | | | | Brown base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|  | 007997272 | 24 | 1.2 W | EBS N10 | | | | 10 | C | | | | Grey base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |
|   | 007997191 | 24 | 1.2 W | EBS R4 | | | | 10 | C | | | | Yellow base |
| DASHBOARD LIGHT | | | | | | | | | | | | | |

Measures in millimeters

| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|-----------------|---------|---------|---------|-------|------------------------|--------|---------|-----------|-----|-----|---------|------------|
| EBS R6   | 007997201 | 24 | 1.2 W | EBS R6 | | | | 10 | C | | | | Brown base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| W2x4.6d   | 007997011 | 12 | 1.2 W | W2x4.6d | | T1.5 | | 10 | C | | | | White base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |
| W2x4.6d   | 007997021 | 24 | 1 W | W2x4.6d | | T1.5 | | 10 | C | | | | White base |
| | DASHBOARD LIGHT | | | | | | | | | | | | |

SEE THE WORLD WITH DIFFERENT LIGHTS











Mercury Free



With a color temperature of 4300K, twice as bright as halogen bulbs and with about three times their luminous efficiency, the white light of these new generation xenon bulbs ensures safety and relaxed driving.

The new HELLA XENON +30 bulbs have a color temperature of up to 5000K, which rivals white LED daytime running lights, offer maximum illumination and visibility similar to daylight. With a low power consumption of 35W, resistance to vibrations and a long service life.

High Intensity Discharge Lamps (HID)
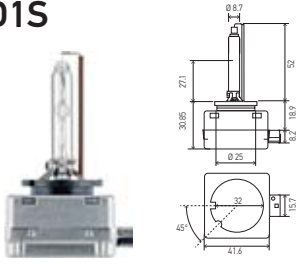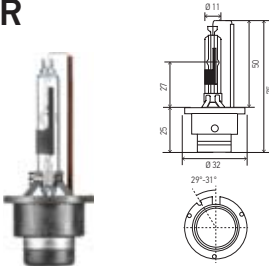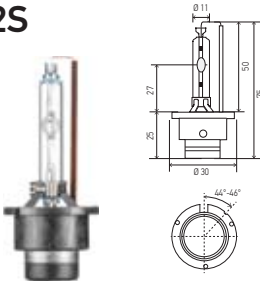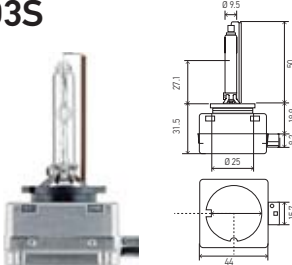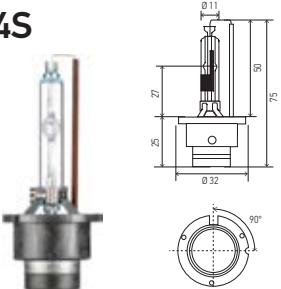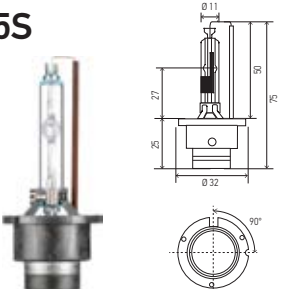
| Product Image / Dimensions | Part Number | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Kelvin | Content | Packaging | DOT | ECE | INMETRO | Features |
|---|---|---------------------|---------|---------|--------|------------------------|--------|---------|-----------|-----|-----|---------|-----------------|
|  | D1S 4300 K | 12/24 | 35 W | PK32d-2 | T3 | 3,200 | 4300 | 1 | C | | ■ | | Standard |
| | D1S 5000 K | 12/24 | 35 W | PK32d-2 | T3 | | 5000 | 1 | C | | ■ | | Performance +30 |
| | LOW BEAM, HIGH BEAM | | | | | | | | | | | | |
|  | D2R 4300 K | 12/24 | 35 W | P32d-3 | T3 | 3,200 | 4300 | 1 | C | | ■ | | Standard |
| | D2R 5000 K | 12/24 | 35 W | P32d-3 | T3 | 2,800 | 5000 | 1 | C | ■ | ■ | | Performance +30 |
| | LOW BEAM, HIGH BEAM | | | | | | | | | | | | |
|  | D2S 4300 K | 12/24 | 35 W | P32d-2 | T2-3/4 | 3,200 | 4300 | 1 | C | | | | Standard |
| | D2S 5000 K | 12/24 | 35 W | P32d-2 | T2-3/4 | | 5000 | 1 | C | | | | Performance +30 |
| | LOW BEAM, HIGH BEAM | | | | | | | | | | | | |
|  | D3S 4300 K | 12/24 | 35 W | P32d-2 | T3 | 3,200 | 4300 | 1 | C | | ■ | | Standard |
| | LOW BEAM, HIGH BEAM | | | | | | | | | | | | |
| |  | D4S 4300 K | 12/24 | 35 W | P32d-5 | T2-3/4 | 2,800 | 4300 | 1 | C | | | |
| LOW BEAM, HIGH BEAM | | | | | | | | | | | | | |
|  | | ◆ D5S 4300 K | 12/24 | 25 W | PK32d | T2-3/4 | 2,800 | 4300 | 1 | C | | | |
| | LOW BEAM, HIGH BEAM | | | | | | | | | | | | |

C = Box B = Blister Pack P = Plastic Case
 * = OPTILUX Product Range ◆ = New Product

Measures in millimeters

HELLA BULBS

BLISTER PACKS



HALOGEN SPECIAL BULBS

HELLA develops and manufactures light bulbs for the automotive industry and also has one of the largest retail organizations for auto parts. Our new range of blister packs lets you choose between different styles of light bulbs in a striking design for retail.



STANDARD

STANDARD

- 12 V and 24 V, double and individual blister
- Exclusive high-quality quartz crystal halogen gas formulation
- Original equipment quality
- Excellent luminous efficiency, quality / price
- Complies with global standards (ECE R37, SAE / DOT and INMETRO regulations)



PERFORMANCE

HELLA +50

- 12 V, double blister pack
- Up to 50% more light than standard HELLA bulbs
- Exclusive high-quality quartz crystal halogen gas formulation
- Meets global standards (ECE R37, SAE / DOT and INMETRO regulations).



PERFORMANCE

HIGH PERFORMANCE 2.0

- 12 V, double blister pack
- Up to 100% more light than standard HELLA bulbs
- Exclusive halogen gas and high quality quartz crystal formulation with blue coating
- Meets global standards (ECE R37, SAE / DOT and INMETRO regulations).



DESIGN

XTREME YELLOW

- Improved visibility under foggy, hail and rain conditions, due to its color temperature reduces reflection on objects
- 12 V - Double blister pack
- Exclusive high-quality halogen gas and quartz crystal formulation with yellow coating
- Recommended for vehicles in rural and off-road areas
- For off-road use.



HIGH WATTAGE

HIGH WATTAGE

- 12 V - double and single blister pack
- More light output compared to standard HELLA bulbs
- Excellent luminous efficiency, quality / price ratio
- For off-road use only




HEAVY-DUTY

HEAVY-DUTY / DOUBLE POWER

- 12 V and 24 V- Box, double and single blister pack
- Greater durability and resistance to vibrations compared to standard HELLA bulbs
- Heavy-duty bulbs offer more power and durability by reducing replacement times.



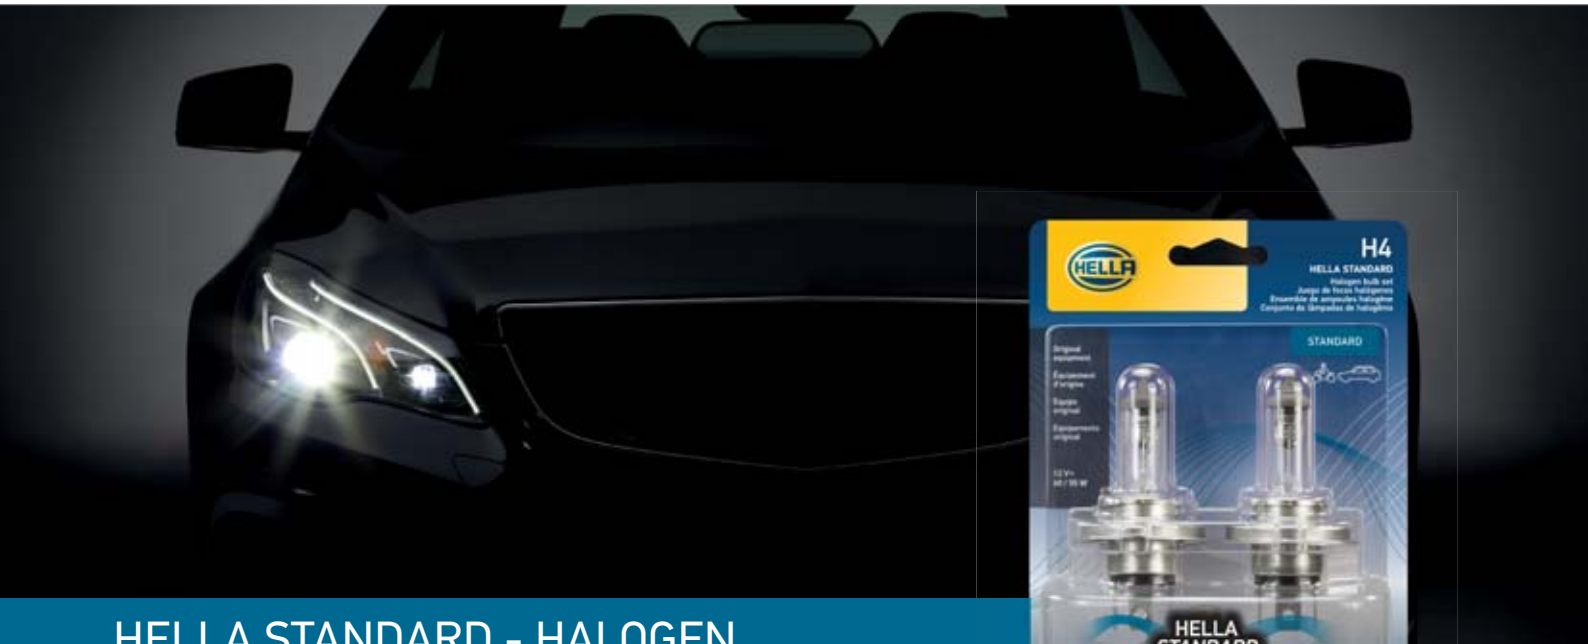

HELLA STANDARD - HALOGEN



HELLA Standard halogen lamps provide original equipment manufacturer quality and a great value for your money. DOT, ECE and inmetro certified*

Note: Please note that bulbs with too high of a wattage can cause the overheating of the wiring and damage to the headlight.

Features:

- Best mixture of light output and reliability
- Original equipment quality
- Excellent luminous efficiency.
- Excellent quality / price

HELLA STANDARD - HALOGEN 12 V

Double Blister Pack



| Part Number | Type | Voltage | Wattage | Base | Content | Packaging |
|---------------|----------|---------|---------|-----------|---------|-----------|
| ◆ 9003TB | 9003/HB2 | 12 V | 60/55 W | P43t | 2 | B |
| ◆ 9004TB | 9004/HB1 | 12 V | 65/45 W | P29t | 2 | B |
| ◆ 9005TB | 9005/HB3 | 12 V | 65 W | P20d | 2 | B |
| ◆ 9006TB | 9006/HB4 | 12 V | 55 W | P22d | 2 | B |
| ◆ 9007TB | 9007/HB5 | 12 V | 65/55 W | PX29t | 2 | B |
| ◆ H1TB | H1 | 12 V | 55 W | P14.5s | 2 | B |
| ◆ H10TB | H10 | 12 V | 45 W | PY20d | 2 | B |
| ◆ H11TB | H11 | 12 V | 55 W | PGJ19-2 | 2 | B |
| ◆ H13TB | H13 | 12 V | 60/55 W | P26.4t | 2 | B |
| ◆ H3TB | H3 | 12 V | 55 W | PK22s | 2 | B |
| ◆ H3 35WTB | H3 | 12 V | 35 W | PK22s | 2 | B |
| ◆ H4TB | H4 | 12 V | 60/55 W | P43t | 2 | B |
| ◆ H4 35/35WTB | H4 | 12 V | 35/35 W | P43t | 2 | B |
| ◆ H4 45/45WTB | H4 | 12 V | 45/45 W | P43t | 2 | B |
| ◆ H4 P45TTB | H4 | 12 V | 60/55 W | P45t | 2 | B |
| ◆ H7TB | H7 | 12 V | 55 W | PX26d | 2 | B |
| ◆ H8TB | H8 | 12 V | 35 W | PGJ19-1 | 2 | B |
| ◆ H9TB | H9 | 12 V | 65 W | PGJ19-5 | 2 | B |
| ◆ HS1TB | HS1 | 12 V | 35/35 W | PX43t | 2 | B |
| ◆ M5 35/35WTB | M5 | 12 V | 35/35 W | P15d-25-1 | 2 | B |

Single Blister Pack



| Part Number | Type | Voltage | Wattage | Base | Content | Packaging |
|---------------|----------|---------|---------|-----------|---------|-----------|
| ◆ 9003SB | 9003/HB2 | 12 V | 60/55 W | P43t | 1 | B1 |
| ◆ 9004SB | 9004/HB1 | 12 V | 65/45 W | P29T | 1 | B1 |
| ◆ 9005SB | 9005/HB3 | 12 V | 65 W | P20d | 1 | B1 |
| ◆ 9006SB | 9006/HB4 | 12 V | 55 W | P22d | 1 | B1 |
| ◆ 9007SB | 9007/HB5 | 12 V | 65/55 W | PX29t | 1 | B1 |
| ◆ H1SB | H1 | 12 V | 55 W | P14.5s | 1 | B1 |
| ◆ H10SB | H10/9145 | 12 V | 45 W | PY20d | 1 | B1 |
| ◆ H11SB | H11 | 12 V | 55 W | PGJ19-2 | 1 | B1 |
| ◆ H13SB | H13 | 12 V | 60/55 W | P26.4t | 1 | B1 |
| ◆ H3SB | H3 | 12 V | 55 W | PK22s | 1 | B1 |
| ◆ H3 35WSB | H3 | 12 V | 35 W | PK22s | 1 | B1 |
| ◆ H4SB | H4 | 12 V | 60/55 W | P43T | 1 | B1 |
| ◆ H4 35/35WSB | H4 | 12 V | 35/35 W | P43T | 1 | B1 |
| ◆ H4 45/45WSB | H4 | 12 V | 45/45 W | P43T | 1 | B1 |
| ◆ H4 P45TSB | H4 | 12 V | 60/55 W | P45t | 1 | B1 |
| ◆ H7SB | H7 | 12 V | 55 W | PX26d | 1 | B1 |
| ◆ H8SB | H8 | 12 V | 35 W | PGJ19-1 | 1 | B1 |
| ◆ H9SB | H9 | 12 V | 65 W | PGJ19-5 | 1 | B1 |
| ◆ HS1SB | HS1 | 12 V | 35/35 W | PX43t | 1 | B1 |
| ◆ M5 35/35WSB | M5 | 12 V | 35/35 W | P15d-25-1 | 1 | B1 |
| ◆ H16SB | H16 | 12 V | 19 W | PGJ19-3 | 1 | B1 |



HELLA STANDARD - MINIATURE BULBS

Miniature bulbs cover a wide range of mostly low voltage bulb types with unique shapes and bases. HELLA miniature bulbs are manufactured with precise lighting requirements to fit a wide variety of brake lamp, stop lamp, turn signal, and reverse lamp applications. DOT, ECE and inmetro certified*

Features:

- Fits a wide variety of applications
- Excellent luminous efficiency.
- Excellent quality / price

HELLA STANDARD MINIATURE:

Double Blister Pack.




| Part Number | Type | Voltage | Wattage | Base | Content | Packaging |
|-------------|------|---------|---------|-----------|---------|-----------|
| ◆ 7506TB | 7506 | 12 V | 21 W | BA15s | 2 | B |
| ◆ 1034TB | 1034 | 12 V | 23/8 W | BAY15D | 2 | B |
| ◆ 2825TB | 2825 | 12 V | 5 W | W2.1x9.5d | 2 | B |
| ◆ 7528TB | 7528 | 12 V | 21/5 W | BAY15d | 2 | B |
| ◆ 921TB | 921 | 12 V | 16 W | W2.1x9.5d | 2 | B |
| ◆ 7443TB | 7443 | 12 V | 21/5 W | W3X16q | 2 | B |
| ◆ 158TB | 158 | 12 V | 3 W | W2.1x9.5d | 2 | B |
| ◆ 5007TB | 5007 | 12 V | 5 W | BA15s | 2 | B |
| ◆ 67TB | 67 | 12 V | 8 W | BA15s | 2 | B |
| ◆ 3898TB | 3898 | 12 V | 2 W | BA7s | 2 | B |
| ◆ 3157TB | 3157 | 12 V | 27/7 W | W2.5x16q | 2 | B |
| ◆ 5008TB | 5008 | 12 V | 10 W | BA15s | 2 | B |
| ◆ 5637TB | 5637 | 24 V | 10 W | BA15s | 2 | B |
| ◆ 3893TB | 3893 | 12 V | 4 W | BA9s | 2 | B |
| ◆ 7440TB | 7440 | 12 V | 21 W | W3X16d | 2 | B |
| ◆ 7507TB | 7507 | 12 V | 21 W | BAU15s | 2 | B |
| ◆ DE3175TB | 3175 | 12 V | 10 W | SV8.5-8 | 2 | B |
| ◆ 6411TB | 6411 | 12 V | 10 W | SV8.5-8 | 2 | B |
| ◆ 2721TB | 2721 | 12 V | 1.2 W | W2x4.6d | 2 | B |
| ◆ 168TB | 168 | 12 V | 5 W | W2.1x9.5d | 2 | B |

Single Blister Pack.



| Part Number | Type | Voltage | Wattage | Base | Content | Packaging |
|-------------|--------|---------|---------|-----------|---------|-----------|
| ◆ 73TB | 73 | 12 V | 1.1 W | W2.1x4.9d | 2 | B |
| ◆ 53TB | 53 | 12 V | 2 W | BA9s | 2 | B |
| ◆ 1157TB | 1157 | 12 V | 27/8 W | BA9s | 2 | B |
| ◆ 7507CTB | 7507C | 12 V | 21 W | BAU15S | 2 | B |
| ◆ 1141TB | 1141 | 12 V | 18 W | BA15s | 2 | B |
| ◆ 7506ATB | 7506A | 12 V | 21 W | BA15s | 2 | B |
| ◆ 6418TB | 6418 | 12 V | 5 W | SV8.5-8 | 2 | B |
| ◆ DE3021TB | 3021 | 12 V | 3 W | SV7-8 | 2 | B |
| ◆ 7225TB | 7225 | 12 V | 21/4 W | BAZ15d | 2 | B |
| ◆ 2827NATB | 2827NA | 12 V | 5 W | W2.1x9.5d | 2 | B |
| ◆ 2821TB | 2821 | 12 V | 3 W | W2.1x9.5d | 2 | B |
| ◆ 2825SB | 2825 | 12 V | 5 W | W2.1x9.5d | 1 | B1 |
| ◆ 7528SB | 7528 | 12 V | 21/5 W | BAY15d | 1 | B1 |
| ◆ 921SB | 921 | 12 V | 16 W | W2.1x9.5d | 1 | B1 |
| ◆ 5007SB | 5007 | 12 V | 5 W | BA15s | 1 | B1 |
| ◆ 5008SB | 5008 | 12 V | 10 W | BA15s | 1 | B1 |
| ◆ 3893SB | 3893 | 12 V | 4 W | BA9s | 1 | B1 |
| ◆ DE3175SB | 3175 | 12 V | 10 W | SV8.5-8 | 1 | B1 |
| ◆ 6235SB | 6235 | 12 V | 35/35 W | BA20d | 1 | B1 |
| ◆ DE3021SB | 3021 | 12 V | 35/35 W | SV7-8 | 1 | B1 |
| ◆ 2821SB | 2821 | 12 V | 3 W | W2.1x9.5d | 1 | B1 |

C = Box B = Blister Pack B1 = Single Blister Pack P = Plastic Case ◆ = New Product

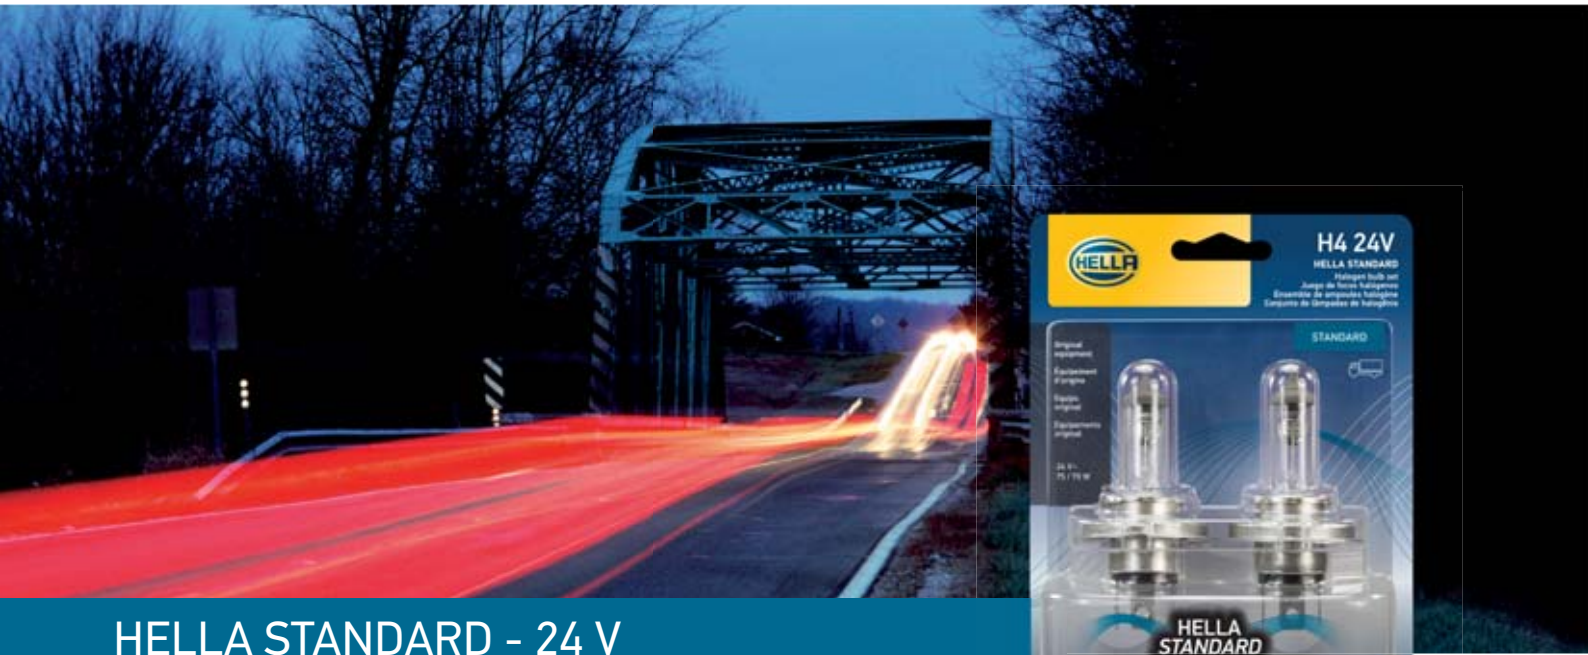

HELLA STANDARD - 24 V



In a convenient presentation, HELLA presents its range of 24 V products in plastic blister packs with the same Original Equipment quality in both halogen bulbs and miniature bulbs.

Features:

- Double blister pack and single blister
- Original equipment quality
- Excellent luminous efficiency. Excellent quality / price
- Meets global standards (ECE R37, SAE / DOT and INMETRO)

HELLA STANDARD 24 V:

Double Blister Pack.



| Part Number | Type | Voltage | Wattage | Base | Content | Packaging |
|--------------|---------|---------|---------|-----------|---------|-----------|
| ◆ 1141 24VTB | 1141 | 24 V | 18 W | BA15s | 2 | B |
| ◆ 2741TB | 2741 | 24 V | 1.2 W | W2x4.6d | 2 | B |
| ◆ 2841TB | 2841 | 24 V | 3 W | W2.1x9.5d | 2 | B |
| ◆ 2845TB | 2845 | 24 V | 5 W | W2.1x9.5d | 2 | B |
| ◆ 3797TB | 3797 | 24 V | 2 W | BA9s | 2 | B |
| ◆ 3930TB | 3930 | 24 V | 4 W | BA9s | 2 | B |
| ◆ 5627TB | 5627 | 24 V | 5 W | BA15s | 2 | B |
| ◆ 6423TB | 6423 | 24 V | 5 W | SV8.5-8 | 2 | B |
| ◆ 6429TB | 6429 | 24 V | 10 W | SV8.5-8 | 2 | B |
| ◆ 7510LTSTB | 7510LTS | 24 V | 21 W | BAU15s | 2 | B |
| ◆ 7511TB | 7511 | 24 V | 21 W | BA15s | 2 | B |
| ◆ 7534TB | 7534 | 24 V | 21/5 W | BA15d | 2 | B |
| ◆ 7537TB | 7537 | 24 V | 21/5 W | BAY15d | 2 | B |
| ◆ 7952TB | 7952 | 24 V | 55/50 W | P45t | 2 | B |
| ◆ 9507TB | 9507 | 24 V | 21 W | BAU15s | 2 | B |
| ◆ H1 24VTB | H1 | 24 V | 70 W | P14.5s | 2 | B |
| ◆ H11 24VTB | H11 | 24 V | 70 W | PGJ19-2 | 2 | B |
| ◆ H3 24VTB | H3 | 24 V | 70 W | PK22s | 2 | B |
| ◆ H4 24VTB | H4 | 24 V | 75/70 W | P43t | 2 | B |
| ◆ H7 24VTB | H7 | 24 V | 70 W | PX26d | 2 | B |
| ◆ H9 24VTB | H9 | 24 V | 80 W | PGJ19-5 | 2 | B |

Single Blister Pack.



| Part Number | Type | Voltage | Wattage | Base | Content | Packaging |
|--------------|------|---------|---------|-----------|---------|-----------|
| ◆ 1141 24VSB | 1141 | 24 V | 18 W | BA15s | 1 | B1 |
| ◆ 2845SB | 2845 | 24 V | 5 W | W2.1x9.5d | 1 | B1 |
| ◆ 5627SB | 5627 | 24 V | 5 W | BA15s | 1 | B1 |
| ◆ 7511SB | 7511 | 24 V | 21 W | BA15s | 1 | B1 |
| ◆ 7537SB | 7537 | 24 V | 21/5 W | BAY15d | 1 | B1 |
| ◆ H1 24VSB | H1 | 24 V | 70 W | P14.5s | 1 | B1 |
| ◆ H11 24VSB | H11 | 24 V | 70 W | PGJ19-2 | 1 | B1 |
| ◆ H3 24VSB | H3 | 24 V | 70 W | PK22s | 1 | B1 |
| ◆ H4 24VSB | H4 | 24 V | 75/70 W | P43t | 1 | B1 |
| ◆ H7 24VSB | H7 | 24 V | 70 W | PX26d | 1 | B1 |
| ◆ H9 24VSB | H9 | 24 V | 80 W | PGJ19-5 | 1 | B1 |



LONG LIFE

The special design of Long Life bulbs for passenger cars guarantees a longer service life, more light performance and reduced energy consumption, making them ideal for frequent drivers and permanent use of daytime running lights. Long Life represents bright but glare-free light. Good performance under extreme conditions for construction machinery or off-road vehicles.

Long Life combines unusual sturdiness and vibration resistance with convincing brightness and long service life.

Features:

- Up to 200% longer life time than HELLA standard bulbs.
- Special mixture of halogen gases to achieve high durability and increase life time
- Meets global standard (ECE R37 & SAE/DOT regulation).
- Color temperature 3,200 K

Some examples of the product range:



H4 24LL



H13LL

HELLA LONG LIFE:

| Part Number | Type | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Content | Packaging | DOT | ECE | INMETRO |
|-------------|------|---------|---------|----------|--------|------------------------|---------|-----------|-----|-----|---------|
| H1LL | H1 | 12 V | 55 W | P14.5s | T2.5 | 1550 | 1 | C | ■ | ■ | ■ |
| ◆ H4 24V LL | H4 | 24 V | 75/70 W | P43t | T4.625 | 1900/1200 | 1 | C | | ■ | ■ |
| ◆ H7 24V LL | H7 | 24 V | 70 W | PX26d | T4.625 | 1750 | 1 | C | | ■ | ■ |
| ◆ H7LL | H7 | 12 V | 55 W | PX26d | T4.625 | 1500 | 1 | C | ■ | ■ | ■ |
| H11LL | H11 | 12 V | 55 W | PGJ19-2 | T4 | 1350 | 1 | C | ■ | ■ | |
| 9003LL | 9003 | 12 V | 60/55 W | P43t | T4.625 | 1500/910 | 1 | C | ■ | | |
| 9004LL | 9004 | 12 V | 65/45 W | P29t | T4.625 | 1200/700 | 1 | C | | | ■ |
| 9005LL | 9005 | 12 V | 65 W | P20d | T4 | 1860 | 1 | C | ■ | ■ | ■ |
| ◆ 9006LL | 9006 | 12 V | 55 W | P22d | T4 | 1095 | 1 | C | ■ | ■ | ■ |
| 9007LL | 9007 | 12 V | 65/55 W | PX29t | T4.625 | 1350/1000 | 1 | C | ■ | | |
| 1003LL | 1003 | 12 V | 12 W | BA15s | B6 | | 1 | C | ■ | | |
| 1141LL | 1141 | 12 V | 18 W | BA15s | S8 | | 1 | C | ■ | | |
| 1156LL | 1156 | 12 V | 27 W | BA15s | S8 | | 1 | C | ■ | | |
| 1157LL | 1157 | 12 V | 27/8 W | BAY15d | S8 | | 1 | C | ■ | | |
| 2057LL | 2057 | 12 V | 27/7 W | BAY15d | S8 | | 1 | C | ■ | | |
| 2057NALL | 2057 | 12 V | 27/7 W | BAY15d | S8 | | 1 | C | ■ | | |
| 2357LL | 2357 | 12 V | 29/8 W | BAY15d | S8 | | 1 | C | ■ | | |
| 3047LL | 3047 | 12 V | 21/7 W | W2.5X16q | S8 | | 1 | C | ■ | | |
| 3157LL | 3157 | 12 V | 27/7 W | W2.5x16q | S8 | | 1 | C | ■ | ■ | |
| 7440LL | 7440 | 12 V | 21 W | W3X16d | T6.5 | | 1 | C | ■ | ■ | ■ |
| 7443LL | 7443 | 12 V | 21/5 W | W3X16q | T6.5 | | 1 | C | ■ | ■ | ■ |




HIGH PERFORMANCE 2.0

HELLA's HP 2.0 Bulbs have been re-engineered to produce a brighter, whiter light which allows the driver to see more contrast in objects on the road, increasing safety and reaction time. These DOT compliant bulbs have been manufactured under strict HELLA guidelines and are an optimal balance of bulb performance and bulb life. The new HP 2.0 kits contain everything you need to get the job done.

Features:

- 12 V - Double Blister Pack
- Up to 100% more light than HELLA standard bulbs
- Meets global standard (ECE R37 & SAE/DOT and INMETRO regulation).
- Specially designed by halogen mixing gas & filament.
- Color temperature: 3,600 K

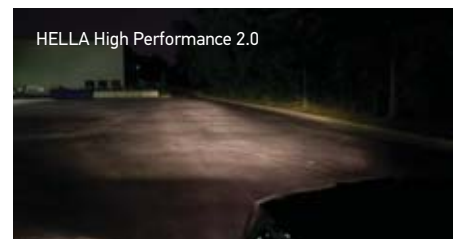

HELLA HIGH PERFORMANCE 2.0:

| Part Number | Type | Voltage | Wattage | Base | Content | Packaging | DOT | ECE | INMETRO |
|--------------|-------------|---------|---------|---------|---------|-----------|-----|-----|-------------|
| ◆ H1 2.0TB | H1 | 12 V | 55 W | P14.5s | 2 | B | ■ | ■ | 007691/2013 |
| ◆ H3 2.0TB | H3 | 12 V | 55 W | PK22s | 2 | B | ■ | ■ | 007696/2013 |
| ◆ 9003 2.0TB | H4 HB2 9003 | 12 V | 60/55 W | P43t | 2 | B | ■ | ■ | 007697/2013 |
| ◆ H7 2.0TB | H7 12V | 12 V | 55 W | PX26d | 2 | B | ■ | ■ | 007698/2013 |
| ◆ H9 2.0TB | H9 12V | 12 V | 65 W | PGJ19-5 | 2 | B | ■ | ■ | - |
| ◆ H11 2.0TB | H11 12V | 12 V | 55 W | PGJ19-2 | 2 | B | ■ | ■ | - |
| ◆ H13 2.0TB | H13 9008 | 12 V | 60/55 W | P26.4t | 2 | B | ■ | ■ | - |
| ◆ 9004 2.0TB | 9004 HB1 | 12 V | 65/45W | P29t | 2 | B | ■ | ■ | 007699/2013 |
| ◆ 9005 2.0TB | 9005 HB3 | 12 V | 65 W | P20d | 2 | B | ■ | ■ | 007700/2013 |
| ◆ 9006 2.0TB | 9006 HB4 | 12 V | 55 W | P22d | 2 | B | ■ | ■ | 007701/2013 |
| ◆ 9007 2.0TB | 9007 HB5 | 12 V | 65/55W | PX29t | 2 | B | ■ | ■ | - |





HELLA +50

The HELLA +50 version produces 50 percent more light (compared to standard bulbs*) and extends the light cone, giving performance-oriented drivers additional safety time in case of an emergency situation.

Features:

- Up to 50% more light output than HELLA standard bulbs
- Meets global standard (ECE R37 & SAE/ DOT and INMETRO regulation).
- Filament design optimized
- Wider and brighter light
- OE quality
- With silver top coating to be invisible in the headlight

Some examples of the product range:

HELLA +50:

| Part Number | Type | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Content | Packaging | DOT | ECE | INMETRO |
|-------------|------|---------|---------|---------|--------|------------------------|---------|-----------|-----|-----|---------|
| H1P50 | H1 | 12 V | 55 W | P14.5s | T2.5 | 1700 | 1 | C | ■ | ■ | ■ |
| ◆ H1P50TB | H1 | 12 V | 55 W | P14.5s | T2.5 | 1700 | 2 | B | ■ | ■ | ■ |
| H3P50 | H3 | 12 V | 55 W | PK22s | T3.25 | 1600 | 1 | C | ■ | ■ | ■ |
| ◆ H3P50TB | H3 | 12 V | 55 W | PK22s | T3.25 | 1600 | 2 | B | ■ | ■ | ■ |
| H4P50 | H4 | 12 V | 60/55 W | P43t | T4.625 | 1815/1100 | 1 | C | | ■ | ■ |
| ◆ H4P50TB | H4 | 12 V | 60/55 W | P43t | T4.625 | 1815/1100 | 2 | B | | ■ | ■ |
| H7P50 | H7 | 12 V | 55 W | PX26d | T4.625 | 1560 | 1 | C | ■ | ■ | ■ |
| ◆ H7P50TB | H7 | 12 V | 55 W | PX26d | T4.625 | 1560 | 2 | B | ■ | ■ | ■ |
| H11P50 | H11 | 12 V | 55 W | PGJ19-2 | T4 | 1450 | 1 | C | ■ | ■ | |
| ◆ H11P50TB | H11 | 12 V | 55 W | PGJ19-2 | T4 | 1450 | 2 | B | ■ | ■ | |
| H13P50 | H13 | 12 V | 60/55 W | P26.4t | T4 | 1650/1100 | 1 | C | ■ | ■ | |
| ◆ H13P50TB | H13 | 12 V | 60/55 W | P26.4t | T4 | 1650/1100 | 2 | B | ■ | ■ | |
| 9004P50 | 9004 | 12 V | 65/45 W | P29t | T4.625 | 1250/765 | 1 | C | ■ | | ■ |
| ◆ 9004P50TB | 9004 | 12 V | 65/45 W | P29t | T4.625 | 1250/765 | 2 | B | ■ | | ■ |
| 9005P50 | 9005 | 12 V | 65 W | P20d | T4 | 2000 | 1 | C | ■ | ■ | ■ |
| ◆ 9005P50TB | 9005 | 12 V | 65 W | P20d | T4 | 2000 | 2 | B | ■ | ■ | ■ |
| 9006P50 | 9006 | 12 V | 55 W | P22d | T4 | 1200 | 1 | C | ■ | ■ | ■ |
| ◆ 9006P50TB | 9006 | 12 V | 55 W | P22d | T4 | 1200 | 2 | B | ■ | ■ | ■ |
| 9007P50 | 9007 | 12 V | 65/55 W | PX29t | T4.625 | 1450 | 1 | C | ■ | | |
| ◆ 9007P50TB | 9007 | 12 V | 65/55 W | PX29t | T4.625 | 1450 | 2 | B | ■ | | |



H4P50



H13P50

C = Box B = Blister Pack B1 = Single Blister Pack P = Plastic Case ◆ = New Product



HIGH WATTAGE

The ideal bulbs for professionals who travel off-road, or have a special demand for high power. Such as those in agriculture or forestry, or on building sites. In addition, HELLA bulbs have been involved in many victories in 24-hour races.

Note: Please note that bulbs with too high of a wattage can cause the overheating of the wiring and damage to the headlight.

Features:

- Box, double and single blister pack
- Longer service life compared to standard HELLA bulbs
- Environmentally friendly, because they do not have to be replaced as often.
- Excellent luminous efficiency.
- Excellent quality / price
- For off-road use only

HELLA HIGH WATTAGE:

| Part Number | Type | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Content | Packaging | DOT | ECE | INMETRO |
|------------------|------|---------|----------|--------|--------|------------------------|---------|-----------|-----|-----|---------|
| H1 100W | H1 | 12 V | 100 W | P14.5s | T2.5 | 1850 | 1 | C | | | |
| ◆ H1 100WTB | H1 | 12 V | 100 W | P14.5s | T2.5 | 1850 | 2 | B | | | |
| H1 130W | H1 | 12 V | 130 W | P14.5s | T2.5 | 2400 | 1 | C | | | |
| H2 100W | H2 | 12 V | 100 W | X511 | T3 | | 1 | C | | | |
| H3 100W | H3 | 12 V | 100 W | PK22s | T3.25 | 1850 | 1 | C | | | |
| ◆ H3 100WTB | H3 | 12 V | 100 W | PK22s | T3.25 | 1850 | 2 | B | | | |
| H3 130W | H3 | 12 V | 130 W | PK22s | T3.25 | 2600 | 1 | C | | | |
| ◆ H3 130WTB | H3 | 12 V | 130 W | PK22s | T3.25 | 2600 | 2 | B | | | |
| H3 24V 100W | H3 | 24 V | 100 W | PK22s | T3.25 | 2500 | 1 | C | | | |
| H4 100/55W | H4 | 12 V | 100/55 W | P43t | T4.625 | 2400/1000 | 1 | C | | | |
| ◆ H4 100/55WTB | H4 | 12 V | 100/55 W | P43t | T4.625 | 2400/1000 | 2 | B | | | |
| H4 100/80W | H4 | 12 V | 100/80 W | P43t | T4.625 | | 1 | C | | | |
| ◆ H4 100/80WTB | H4 | 12 V | 100/80 W | P43t | T4.625 | | 2 | B | | | |
| H4 130/90W | H4 | 12 V | 130/90 W | P43t | T4.625 | 3200/1600 | 1 | C | | | |
| ◆ H4 130/90WTB | H4 | 12 V | 130/90 W | P43t | T4.625 | 3200/1600 | 2 | B | | | |
| H4 24V 100/90W | H4 | 24 V | 100/90 W | P43t | T4.625 | | 1 | C | | | |
| H7 100W | H7 | 12 V | 100 W | PX26d | T4.625 | 2000 | 1 | C | | | |
| ◆ H7 100WTB | H7 | 12 V | 100 W | PX26d | T4.625 | 2000 | 2 | B | | | |
| H7 70W | H7 | 12 V | 70 W | PX26d | T4.625 | 1800 | 1 | C | | | |
| 9004 100/80W | 9004 | 12 V | 100/80 W | P29t | T4.625 | 1600/1300 | 1 | C | | | |
| 9005 100W | 9005 | 12 V | 100 W | P20d | T4 | 2200 | 1 | C | | | |
| 9006 80W | 9006 | 12 V | 80 W | P22d | T4 | 1650 | 1 | C | | | |
| 9007 100/80W | 9007 | 12 V | 100/80 W | PX29t | T4.625 | 1800/1500 | 1 | C | | | |
| ◆ H4 100/80WSB | H4 | 12 V | 100/80 W | P43t | T4.625 | | 1 | B1 | | | |
| ◆ 9007 100/80WSB | 9007 | 12 V | 100/80 W | PX29t | T4.625 | 1800/1500 | 1 | B1 | | | |
| ◆ 9004 100/80WSB | 9004 | 12 V | 100/80 W | P29t | T4.625 | 1600/1300 | 1 | B1 | | | |
| ◆ 9006 80WSB | 9006 | 12 V | 80 W | P22d | T4 | 1650 | 1 | B1 | | | |
| ◆ 9005 100WSB | 9005 | 12 V | 100 W | P20d | T4 | 2200 | 1 | B1 | | | |

C = Box B = Blister Pack B1 = Single Blister Pack P = Plastic Case ◆ = New Product

Some examples of the product range:



9005 100W



9004 100/80W



HEAVY DUTY | DOUBLE POWER

Durability, resistance to vibration with 24V power produces excellent light in a single filament. Heavy Duty bulbs offer more power, more safety, without dazzling vehicles. Thanks to its power and increased lifespan, the replacement costs are reduced drastically.

Features:

- Increased vibration resistance
- All advantages of standard bulbs
- Reduced downtime cost due to less bulb changes

Some examples of the product range:

HELLA HEAVY DUTY:

| Part Number | Type | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Content | Packaging | DOT | ECE | INMETRO |
|---------------|-------|---------|---------|--------|--------|------------------------|---------|-----------|-----|-----|---------|
| 198HD | 198 | 12 V | 29/10 W | BAY15d | S8 | | 10 | C | ■ | | |
| 5637HD | 5637 | 24 V | 10 W | BA15s | B6 | | 10 | C | | ■ | ■ |
| 7510LTS | PY21W | 24 V | 21 W | BAU15s | S8 | | 10 | C | | | |
| H3 24V HD | H3 | 24 V | 70 W | PK22s | T3.25 | 1750 | 1 | C | | ■ | ■ |
| H3HD | H3 | 12 V | 55 W | PK22s | T3.25 | 1450 | 1 | C | ■ | ■ | ■ |
| ◆ H3 24V HDSB | H3 | 24 V | 70 W | P43t | T3.25 | 1900/1200 | 1 | B | | ■ | ■ |
| ◆ H3 24V HDTB | H3 | 24 V | 70 W | P43t | T3.25 | | 2 | B | | ■ | ■ |
| H4 24V HD | H4 | 24 V | 75/70 W | PK22s | T4.625 | | 1 | C | | ■ | ■ |
| ◆ H4 24V HDSB | H4 | 24 V | 75/70 W | PK22s | T4.625 | | 1 | B | | ■ | ■ |
| ◆ H4 24V HDTB | H4 | 24 V | 75/70 W | PK22s | T4.625 | | 2 | B | | ■ | ■ |



H4 24V HD

HELLA DOUBLE POWER:

| | | | | | | | | | | | |
|----------------|-----|------|---------|---------|--------|--|---|---|--|---|---|
| ◆ H1 24V DP | H1 | 24 V | 70 W | P14.5s | T2.5 | | 1 | C | | ■ | ■ |
| ◆ H3 24V DP | H3 | 24 V | 70 W | PK22s | T3.25 | | 1 | C | | ■ | ■ |
| ◆ H4 24V DP | H4 | 24 V | 70/75 W | P43t | T4.625 | | 1 | C | | ■ | ■ |
| ◆ H7 24V DP | H7 | 24 V | 70 W | PX26d | T4.625 | | 1 | C | | ■ | ■ |
| ◆ H11 24V DP | H11 | 24 V | 70 W | PGJ19-2 | T4 | | 1 | C | | ■ | |
| ◆ H1 24V DPSB | | 24 V | 70 W | P14.5s | T2.5 | | 1 | B | | ■ | ■ |
| ◆ H3 24V DPSB | | 24 V | 70 W | PK22s | T3.25 | | 1 | B | | ■ | ■ |
| ◆ H4 24V DPSB | | 24 V | 75/70 W | P43t | T4.625 | | 1 | B | | ■ | ■ |
| ◆ H7 24V DPSB | | 24 V | 70 W | PX26d | T4.625 | | 1 | B | | ■ | ■ |
| ◆ H11 24V DPSB | | 24 V | 70 W | PGJ19-2 | T4 | | 1 | B | | ■ | |



H3HD



OPTILUX EXTREME YELLOW XY - 12V

The XY Optilux bulbs are designed to give better visibility in extreme weather conditions. Pilots races prefer a yellow light beam, which provides better color contrast in rain and fog situations. The XY Optilux bulbs produce a clear yellow light their filament is made of specific measures to provide the exact amount of light needed in the way.

Features:

- All bulbs are Optilux 12V.
- Two bulbs packed in hard plastic.
- For off-road use

Some examples of the product range:



| Part Number | Type | Voltage | Wattage | Base |
|-------------|---------|---------|---------|----------|
| H71071172 | 880 | 12V | 27 W | PG13 |
| H71071182 | 881 | 12V | 27 W | PGJ13 |
| ◆ H71071192 | 893 | 12V | 37.5 W | PG13 |
| ◆ H71071462 | 9006 | 12V | 55 W | P22d** |
| H71071532 | 9011 | 12V | 65 W | PX20d |
| H71071542 | 9012 | 12V | 55 W | PX22d |
| H71070642 | H1 | 12V | 55 W | P14.5s |
| ◆ H71071112 | H10 | 12V | 42 W | PY20d |
| H71071132 | H11 | 12V | 55 W | PGJ19-2 |
| H71071552 | H11B | 12V | 65W | PGJY19-2 |
| H71071152 | H13 | 12V | 60/55 W | P26.4t |
| H71071302 | H16 | 12V | 35 W | PG20-3 |
| H71070662 | H3 | 12V | 55 W | PK22s |
| H71071342 | H3C | 12V | 55 W | P22d |
| H71070682 | H4/9003 | 12V | 60/55 W | P43t |
| H71070702 | H7 | 12V | 55 W | PX26d |
| H71071072 | H8 | 12V | 35 W | PGJ19-1 |
| H71071092 | H9 | 12V | 65 W | PGJ19-5 |
| H71070562 | HB1 | 12V | 65/45 W | P29t |
| H71070582 | HB3 | 12V | 65 W | P20d |
| H71070602 | HB4 | 12V | 55 W | P22d |
| H71070622 | HB5 | 12V | 60/55 W | PX29t |





OPTILUX EXTREME WHITE XB - 12V

See the light!

Extreme White bulbs XB Optilux give a radical look at the xenon light in a halogen bulb, with its blue coating. These bulbs incorporate gas xenon bulb improved performance

Features:

- All bulbs are Optilux 12V.
- Two bulbs packed in hard plastic.
- For off-road use



| Part Number | Type | Voltage | Wattage | Base | Part Number | Type | Voltage | Wattage | Base |
|-------------|------|---------|---------|----------|-------------|---------|---------|----------|---------|
| H71071212 | 880 | 12V | 32 W | PG13 | ◆ H71071052 | H13 | 12V | 100/80 W | P26.4t |
| H71071222 | 881 | 12V | 32 W | PGJ13 | H71071272 | H13 | 12V | 60/55 W | P26.4t |
| H71071232 | 893 | 12V | 37.5 W | PG13 | H71071282 | H16 | 12V | 35 W | PG20-3 |
| H71071392 | 9004 | 12V | 65/45 W | P29t | H71070227 | H2 | 12V | 100 W | P14.5s |
| H71071402 | 9005 | 12V | 65 W | P20d | H71070181 | H3 | 12V | 100 W | PK22s |
| H71071412 | 9005 | 12V | 65 W | P20d** | H71071312 | H3 | 12V | 55 W | PK22s |
| H71071422 | 9005 | 12V | 100 W | P20d** | H71071322 | H3C | 12V | 55 W | P22d |
| H71071432 | 9006 | 12V | 55 W | P22d | H71071332 | H3C | 12V | 80 W | P22d |
| H71071442 | 9006 | 12V | 55 W | P22d** | H71070201 | H4/9003 | 12V | 100/80 W | P43t |
| H71071452 | 9006 | 12V | 80 W | P22d** | H71071352 | H4/9003 | 12V | 60/55 W | P43t |
| H71071472 | 9007 | 12V | 65/55 W | PX29t | H71070307 | H7 | 12V | 100 W | PX26d |
| ◆ H71071492 | 9011 | 12V | 65 W | PX20d | H71071362 | H7 | 12V | 55 W | PX26d |
| ◆ H71071502 | 9012 | 12V | 55 W | PX22d | H71070772 | H8 | 12V | 55 W | PGJ19-1 |
| H71071242 | H1 | 12V | 55 W | P14.5s | H71071372 | H8 | 12V | 35 W | PGJ19-1 |
| H71071012 | H10 | 12V | 65 W | PY20d | H71070792 | H9 | 12V | 100 W | PGJ19-5 |
| H71071252 | H10 | 12V | 42 W | PY20d | H71071382 | H9 | 12V | 65 W | PGJ19-5 |
| H71071032 | H11 | 12V | 80 W | PGJ19-2 | H71070327 | HB1 | 12V | 100/80 W | P29t |
| H71071262 | H11 | 12V | 55 W | PGJ19-2 | H71070347 | HB3 | 12V | 100 W | P20d |
| H71071512 | H11B | 12V | 65W | PGJY19-2 | H71070367 | HB4 | 12V | 80 W | P22d |
| | | | | | H71070387 | HB5 | 12V | 100/80 W | PX29t |
















LIGHT UP YOUR BUSINESS

TWO WHEELS



S
EELERS

1 FRONT LIGHT  LOW BEAM  HIGH BEAM

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| HS1 | H3 35W | H8 H8XE-DB | H4 35/35W M H4 60/55W M | H7 |
|  |  |  |  |  |
| H8 | H9 | H11 H11P50 H11LL | M5 | HS1 / H4 |
|  |  |  |  |  |
| 6235 | M5 25/25W3 | M5 35/35W3 | M5 35/35W1 | M5 25/25W |
|  |  |  | | |
| H21W | M5 18/18W M5 35/35W | M5 25/25W1 | | |

2 SIGNAL LIGHT  FRONT  REAR

| | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| H21W | 921 W16W | 2821 | 2825 W5W | 7440 W21W | 7440NA WY21W | 7443 | 1157LED |
|  |  |  |  |  |  |  | |
| 1891 | 5007 R5W | 5008 R10W | 5009A R10W | 7506 1141 P21W | 7528 1034 P21/5W | 7507 1034A PY21W | |

3 FRONTAL PARKING LIGHT 

| | | | | | | |
|---|---|--|---|---|---|---|
|  |  |  |  |  |  |  |
| 3893 T4W | 5007 R5W | 5008 R10W | H6W | 194 W3W | 2845 W5W | 921 W16W |



4 STOP LIGHT



7528 P21/5W 7506 P21W 921 W16W 7443 W21/5W 5007 R5W



1157RLED 7443WLED 194WLED 1141 1034 A

5 LICENSE PLATE LIGHT



6413 C5W H6W 5007 R5W 194 W3W 2825 W5W 5008 R10W 3893 T4W



7 POSITION LIGHT



7528 P21/5W 7507 2721 3796 DE3175 6413 7537 P21/5W 7506 P21W 7443 W21/5W 194 W3W 2845 W5W 3893 T4W 5007 R5W 5008 R10W



HELLA has the most complete line of lighting for cars, trucks, buses and now for motorcycles, scooters, mopeds and ATVs.

As original equipment, HELLA is found in most of the car manufacturers, this means that we guarantee 100% light according to the technical standards, offering a long life and in perfect harmony with the whole vehicle. In addition, HELLA halogen bulbs have a UV filter that protects the headlight lens by blocking UV rays, which prevents yellowing of the lens.

BULBS FOR MOTORCYCLES



BULBS FOR MOTORCYCLES

For the wide range of motorcycles, scooters, mopeds and ATVs, HELLA offers precise solutions according to the requirements of original equipment.

Because it is particularly important for drivers of two-wheel vehicles to see and be seen...

Note:

In headlights, particularly in the case of motorcycles large motor or large displacement is common to find halogen bulbs with identical specification to those of automotive application (H4 60/55, H7 55W, 9006 55W, 9006 HXS 55W, etc.)



| Part Number | Type | Voltage | Wattage | Base | Shape | Luminous Flux (lumens) | Content | Packaging | DOT | ECE | INMETRO |
|-------------|--------|---------|-----------|-----------|--------|------------------------|---------|-----------|-----|-----|---------|
| 880XE-35DB | 880 | 12 V | 35 W | PG13 | T3.25 | | 1 | C | | | |
| 889XE-35DB | 894 | 12 V | 35 W | PGJ13 | T3.25 | | 1 | C | | | |
| H3 35W | H3 | 12 V | 35 W | PK22s | T3.25 | | 1 | C | | | |
| H8 | H8 | 12 V | 35 W | PGJ19-1 | T4 | | 1 | C | ■ | ■ | |
| H8XE-DB | H8 | 12 V | 35 W | PGJ19-1 | T4 | | 1 | C | | | |
| HS1 | HS1 | 12 V | 35 / 35 W | PX43t | T4.625 | | 1 | C | | ■ | |
| H4 35/35W | H4 | 12 V | 35/35 W | P43t | T4.625 | | 1 | C | | | |
| H4 45/45W | H4 | 12 V | 45/45 W | P43t | T4.625 | | 1 | C | | | |
| 6235 | S2 | 12 V | 35/35 W | BA20d | B11 | | 1 | C | | | ■ |
| 6245 | S2 | 12 V | 45/40 W | BA20d | B11 | | 1 | C | | | |
| A3603 | 3603 | 12 V | 25/25 W | PX15d | T6 | | 1 | C | | | |
| 6260 | S2 | 12 V | 60/60 W | BA20d | B11 | | 1 | C | | | |
| A3625 | 3625 | 6 V | 25/25 W | PX15d | T6 | | 1 | C | | | |
| 635 | F2 | 12 V | 35 W | BA20s | B11 | | 1 | C | | | |
| 660 | 660 | 12 V | 60 W | BA20s | B11 | | 1 | C | | | |
| 7951 | R2 | 12 V | 45/40 W | P45t | S13 | | 1 | C | | | |
| 7952 | R2 | 24 V | 55/50 W | P45t | S13 | | 1 | C | | | |
| H9 | H9 | 12 V | 65 W | PGJ19-5 | T4 | | 1 | C | ■ | ■ | |
| H11 | H11 | 12 V | 55 W | PGJ19-2 | T4 | | 1 | C | ■ | ■ | |
| H11P50 | H11 | 12 V | 55 W | PGJ19-2 | T4 | | 1 | C | ■ | ■ | |
| H11LL | H11 | 12 V | 55 W | PGJ19-2 | T4 | | 1 | C | ■ | ■ | |
| H21W | H21W | 12 V | 21 W | BAY9s | T2.75 | | 1 | C | | ■ | ■ |
| H6W | H6W | 12 V | 6 W | BAX9s | T2.75 | | 1 | C | | ■ | |
| 2820 | 2820 | 12 V | 2 W | W2.1x9.5d | T3.25 | | 10 | C | | | |
| 2821 | 2821 | 12 V | 3 W | W2.1x9.5d | T3.25 | | 10 | C | | ■ | ■ |
| 2825 | 2825 | 12V | 5 W | W2.1x9.5d | T3.25 | | 10 | C | | ■ | ■ |
| 2825BL | 2825BL | 12 V | 5 W | W2.1x9.5d | T3.25 | | 10 | C | | | |
| 2827NA | 2827NA | 12 V | 5 W | W2.1x9.5d | T3.25 | | 10 | C | | | |
| 3652 | 3652 | 12 V | 5 W | W2.1x9.5d | T3.25 | | 10 | C | | ■ | ■ |
| 7440 | 7440 | 12 V | 21 W | W3X16d | T6.5 | | 10 | C | ■ | ■ | ■ |
| 7440LL | 7440 | 12 V | 21 W | W3X16d | T6.5 | | 10 | C | ■ | ■ | ■ |
| 7440NA | 7440 | 12 V | 21 W | W3X16d | T6.5 | | 10 | C | ■ | ■ | ■ |
| 7441 | 7441 | 12 V | 27 W | W3X16d | T6.5 | | 10 | C | ■ | ■ | |
| 3893 | 3893 | 12 V | 4 W | BA9s | T2.75 | | 10 | C | ■ | ■ | |
| 194 | 194 | 12 V | 4 W | W2.1x9.5d | T3.25 | | 10 | C | ■ | | |
| 194NA | 194 | 12 V | 4 W | W2.1x9.5d | T3.25 | | 10 | C | ■ | | |
| 7507C | 7507 | 12 V | 21 W | BAU15s | S8 | | 10 | C | | ■ | ■ |
| 7507 | 7507 | 12 V | 21 W | BAU15s | S8 | | 10 | C | | ■ | ■ |
| 2721 | 2721 | 12 V | 1.2 W | W2x4.6d | T1.5 | | 10 | C | ■ | | ■ |

Some examples of the product range:



6235



660



7951

LED Retrofit

Motorcycle range

Elegant look with daylight effect

With our LED Retrofit program, motorcycle lighting can be converted to the latest LED technology. The new LED Retrofits offer exceptional luminosity, and thanks to the optimized light distribution, there is more light on the road where it is needed. A longer service life than halogen headlights makes LED Retrofits attractive to all motorcyclists.

The stylish image with a cool white beam gives motorcyclists a daylight effect at night and more comfort and fun when riding. Our LED Retrofit range includes low and high beams for motorcycle headlights. See and be seen – that's our motto!

Standard lamp



HELLA LED lamp



LED
UPGRADE



Product Range



LED (~ HS1 / H4 Moto)

226971581 1 piece. 12V 6W P43t 6.500 K



LED (~ M5 Moto)

226971591 1 piece 12V 6W P15d-25-1 6.500 K



OTHERS



Displays



Pre-stocked bulb display

Ask your sales representative for the new HELLA displays and get them now!

- Metal frame with 4 shelves and acrylic window
- Shelving is adjustable inside the cabinet
- Durable and elegant design
- Contents: H7 (24 packs), H3 24V (4 packs), 9003 (6 packs), H11 (4 packs), H1 (4 packs), H3 (4 packs), 2 boxes of 10 pcs of the following bulbs: 3157, 194, 7506, 921, 3898

| Part Number | Description |
|-------------|---|
| 999942461 | Pre-stocked bulb display. Dimensions: 44.5x 17.5x 54 cm (17.5 x 6.88 x 21.2") |

Bulbs cabinet for miniature bulbs

Ask your sales representative for the new HELLA displays and get them now!

- Manufactured in semi-matt black steel.
- Its compartments come in stackable and individual shapes to maximize organization.
- The miniature bulb dispenser cabinet includes 4 plastic drawers, dividers to make 28 slots for light bulbs
- Storage space "behind" the label
- Durable and elegant design



| Part Number | Description |
|-------------|--|
| 999141848 | Cabinet Display. Dimensions: 48.2 x 10.1 x 68.5 cm (18.97 x 3.97 x 26.9") |


Blister display

- Manufactured in semi-matt black steel.
- Its 8 hooks allow you to hang up to 40 blisters in total.




| Part Number | Description |
|-------------|--|
| 999942713 | Hanging blister display. |
| 999942615 | Counter top blister display |
| | Dimensions: 52 x 22 x 55.5 cm (20.47 x 8.66 x 21.85") |


Halogen bulbs bases




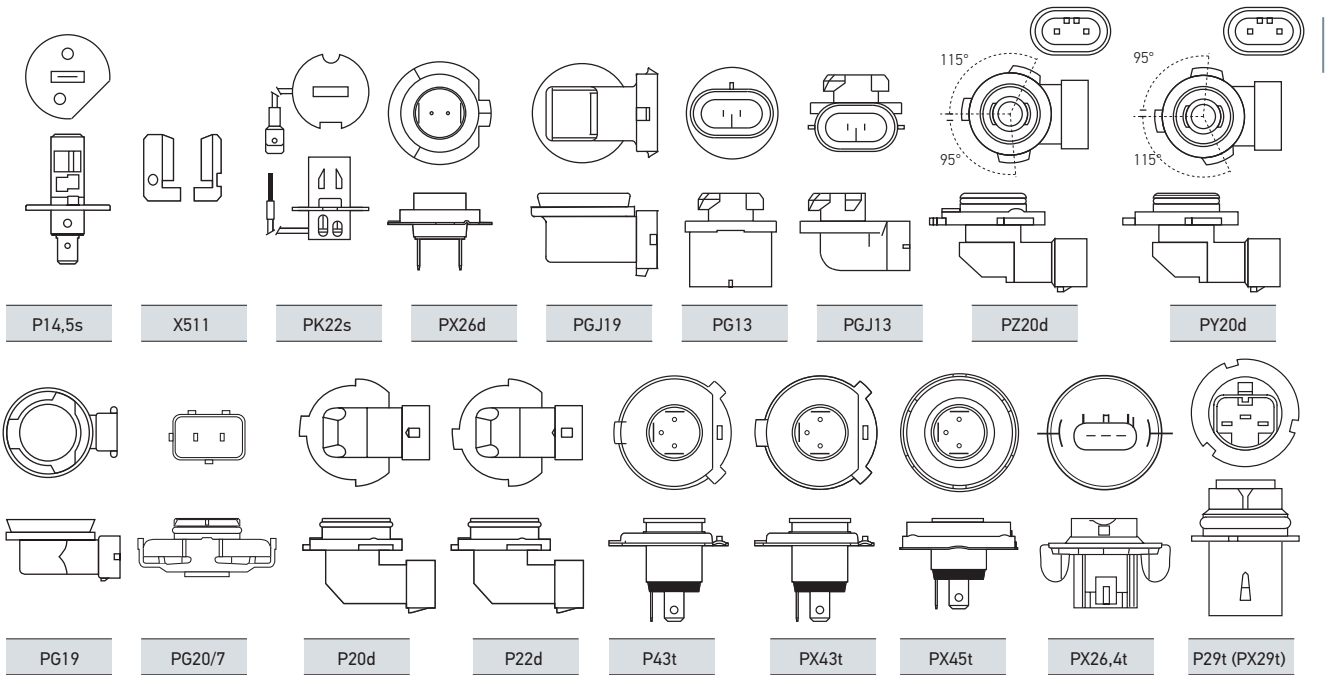






Xenon bulbs bases

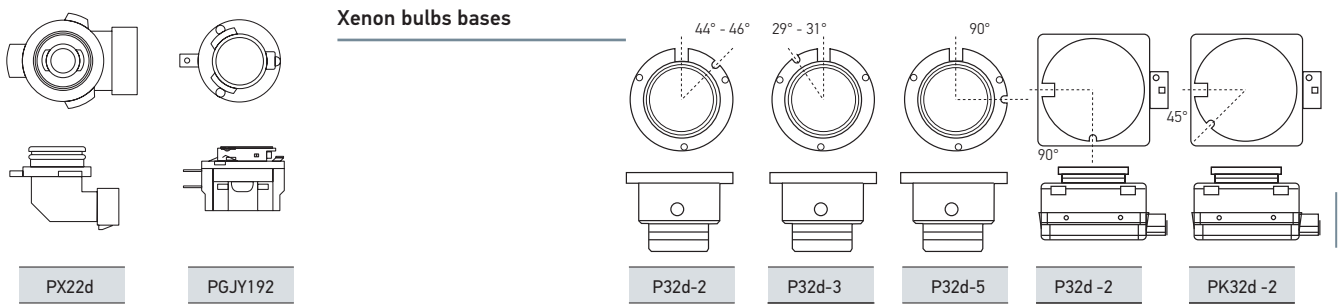


Miniature bulbs bases

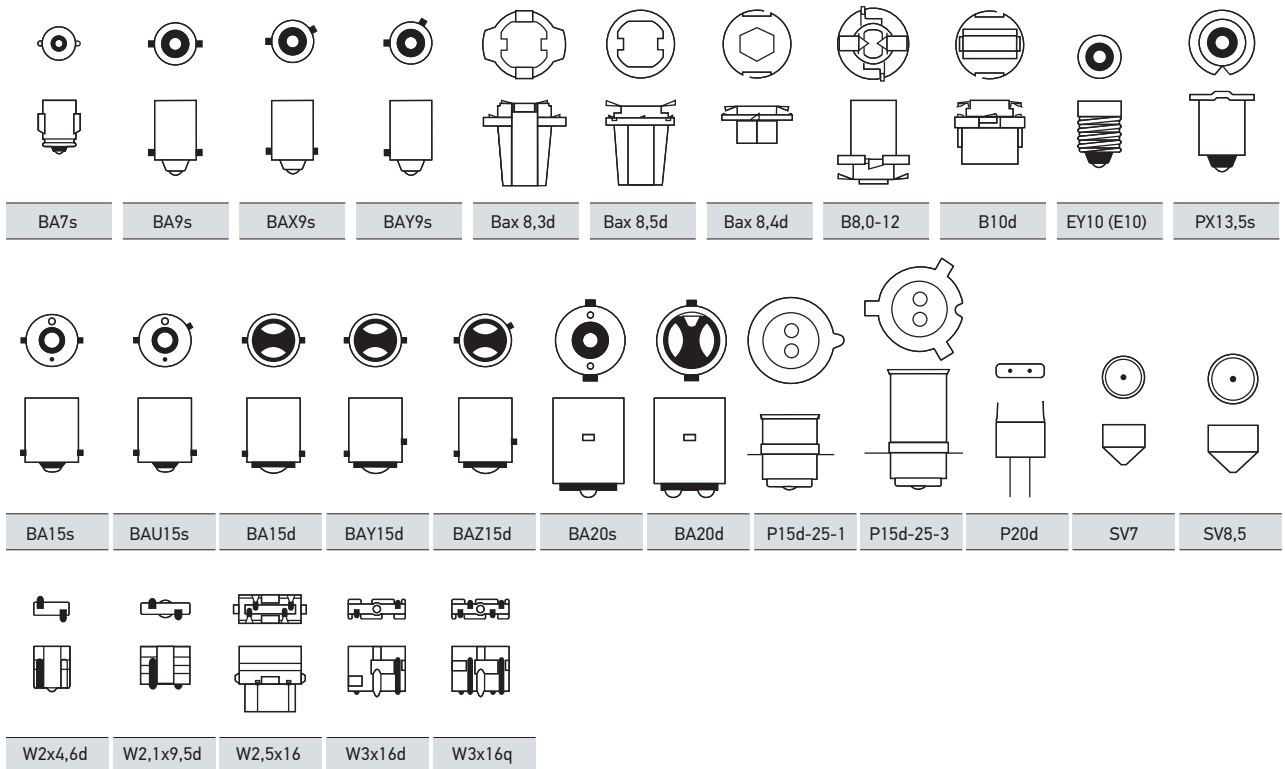

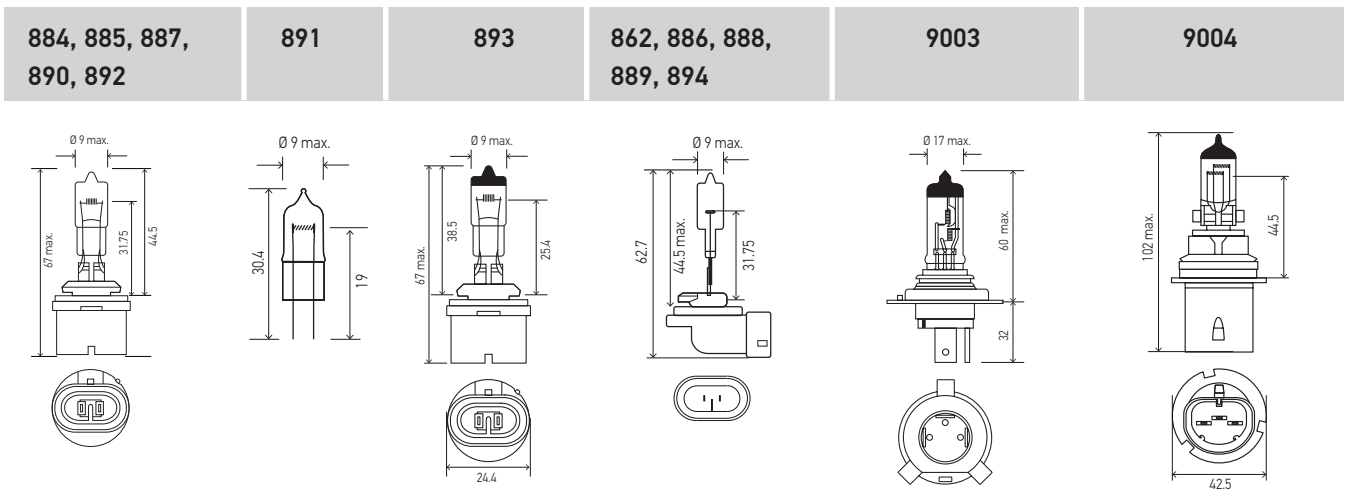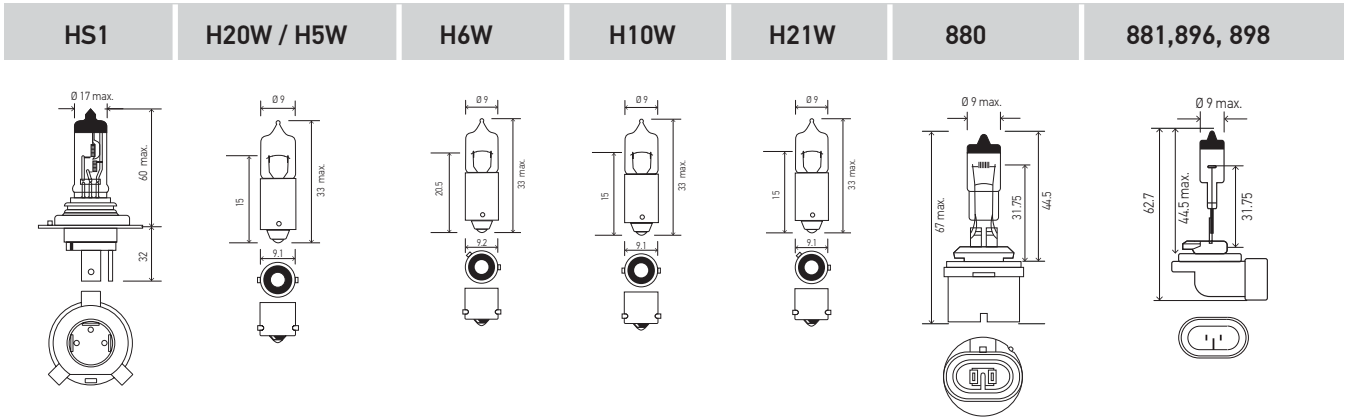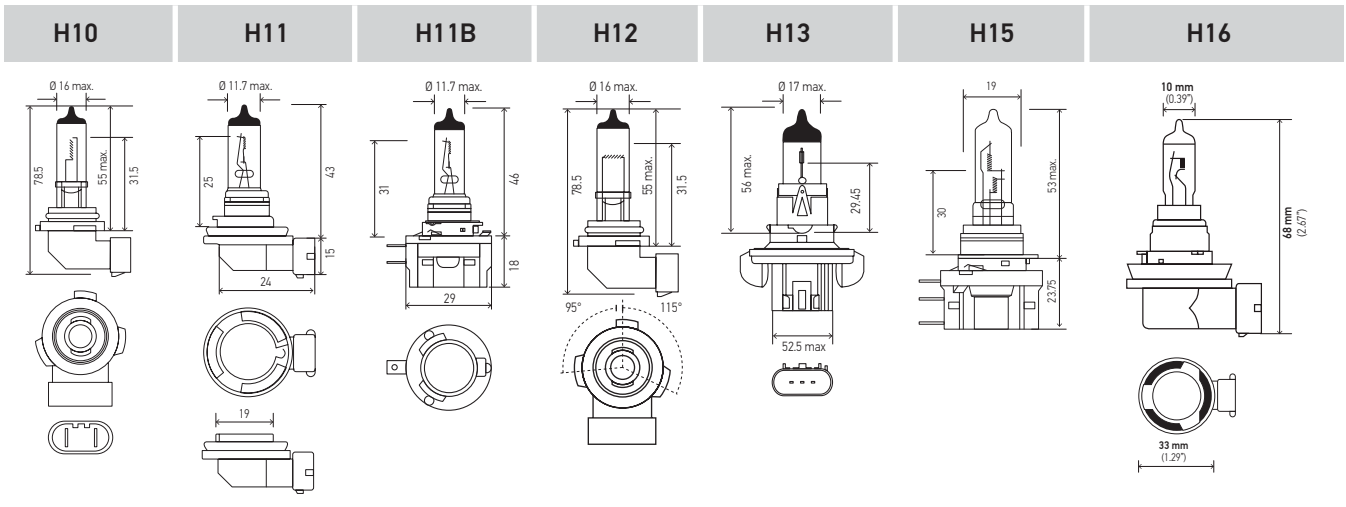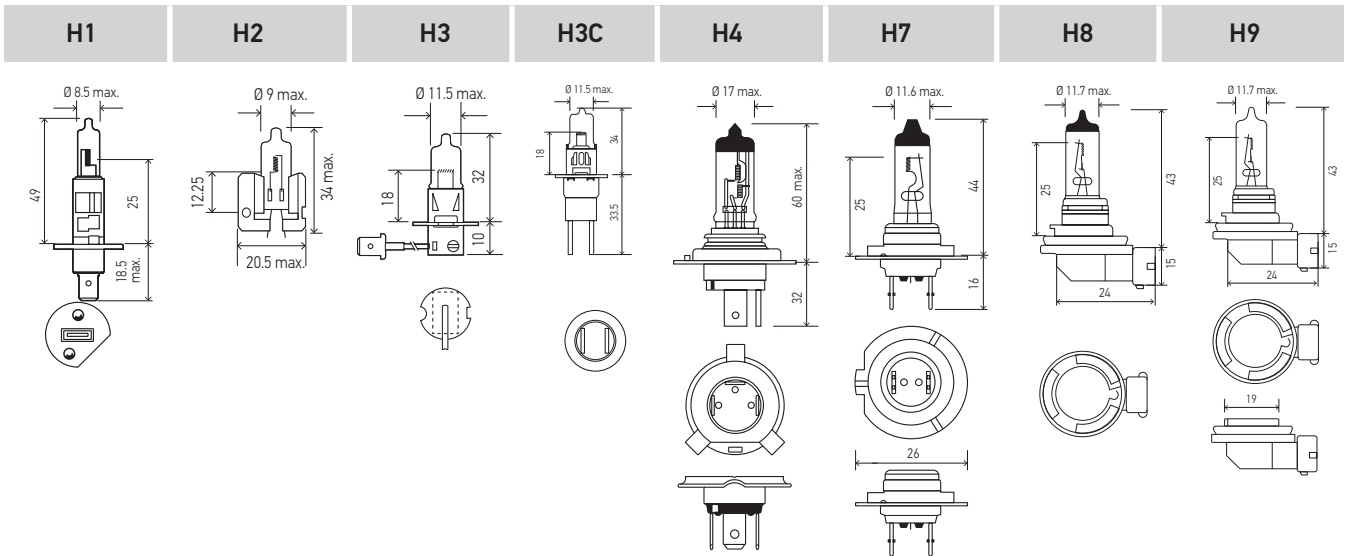


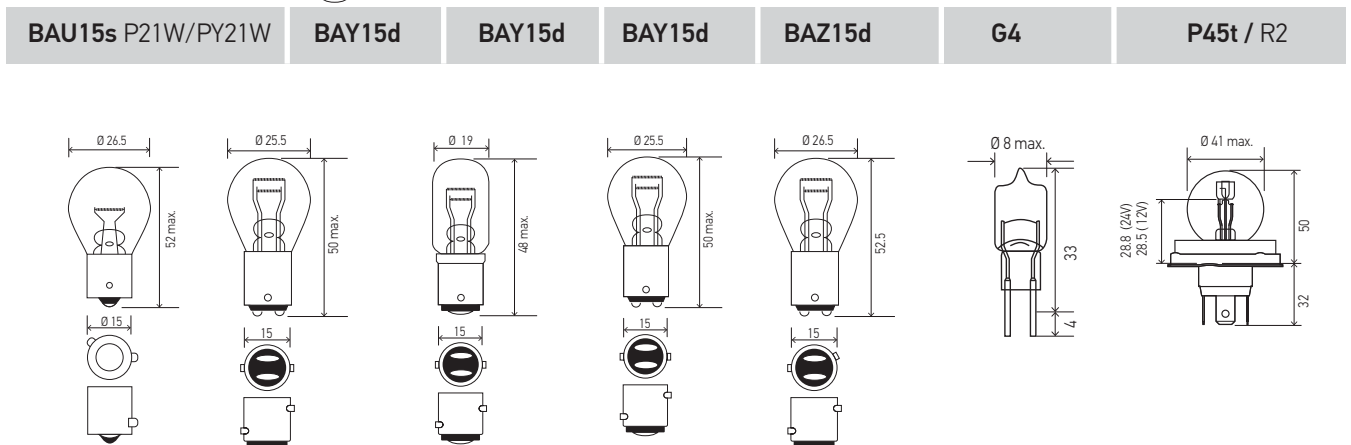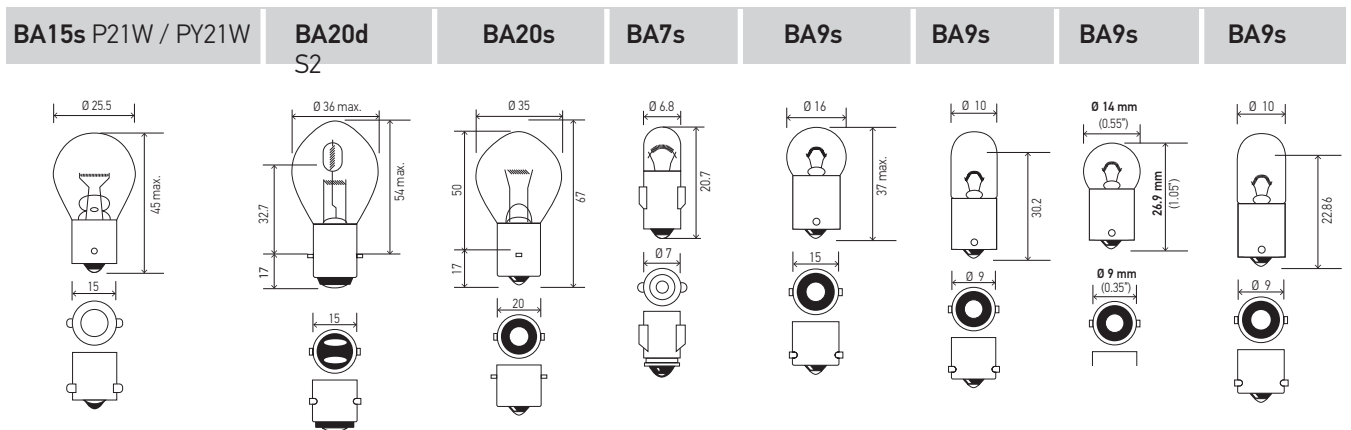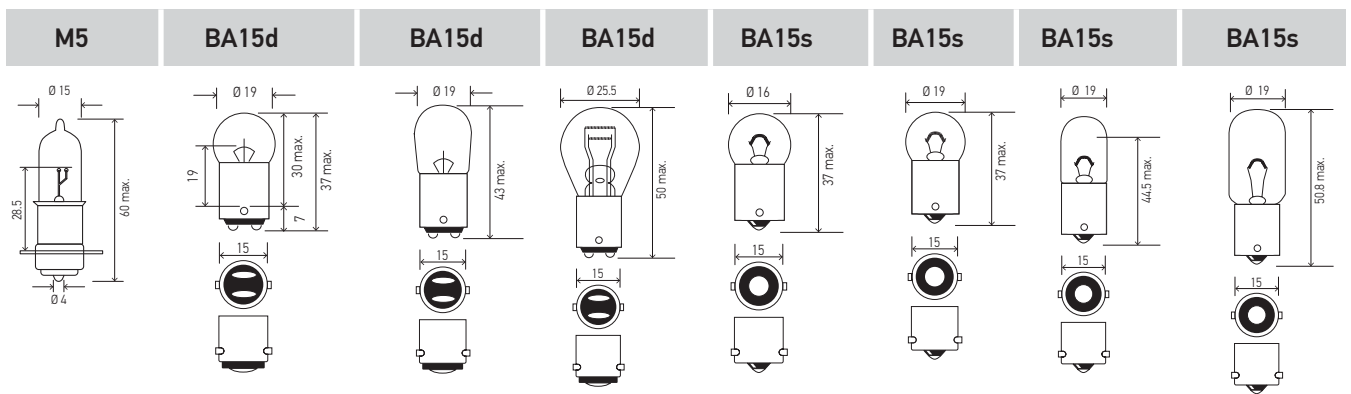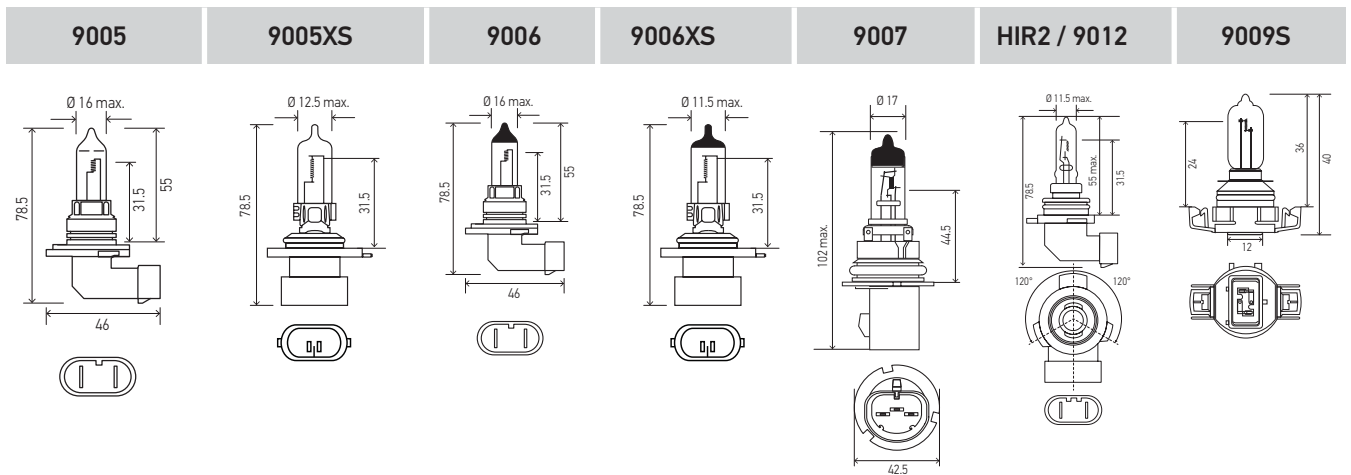


| PX15d | SV7-8 | SV7-8 | SV8.5-8 | SV8.5-8 | SV8.5-8 / C5W | W2.1x4.9d |
|-------|-------|-------|---------|---------|---------------|-----------|
|-------|-------|-------|---------|---------|---------------|-----------|

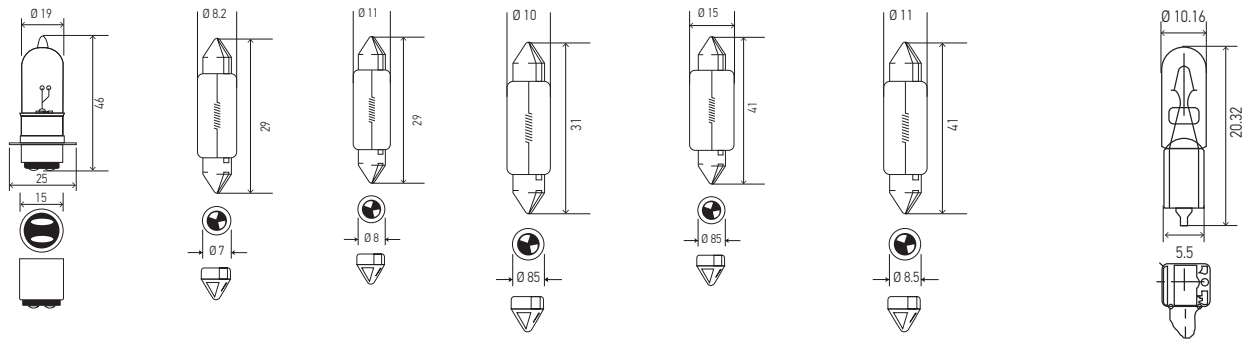


| W2.1x9.5d | W2.1x9.5d | W2.1x9.5d | W2.5x16d | W2x4.6d | W2x4.6d | W2x4.6d |
|-----------|-----------|-----------|----------|---------|---------|---------|
|-----------|-----------|-----------|----------|---------|---------|---------|

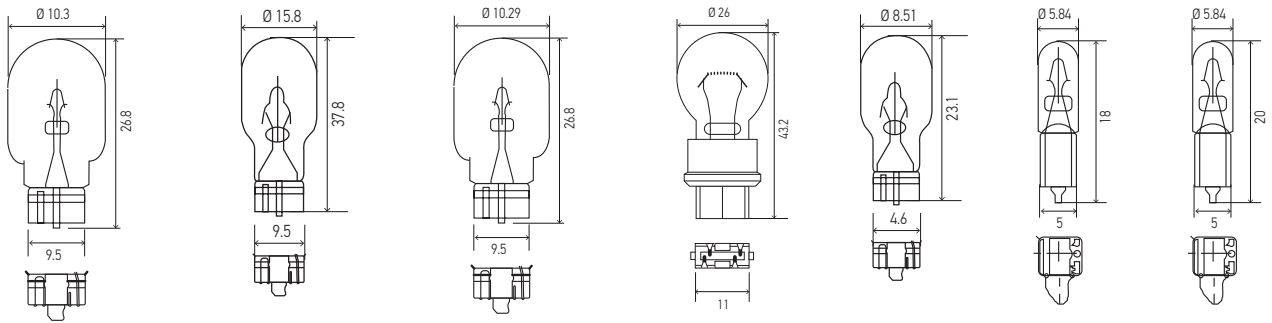


| W3x16d | W3x16d | W2.5x16q | B10d | B8.3d | B8.5d | B8.5d |
|--------|--------|----------|------|-------|-------|-------|
|--------|--------|----------|------|-------|-------|-------|

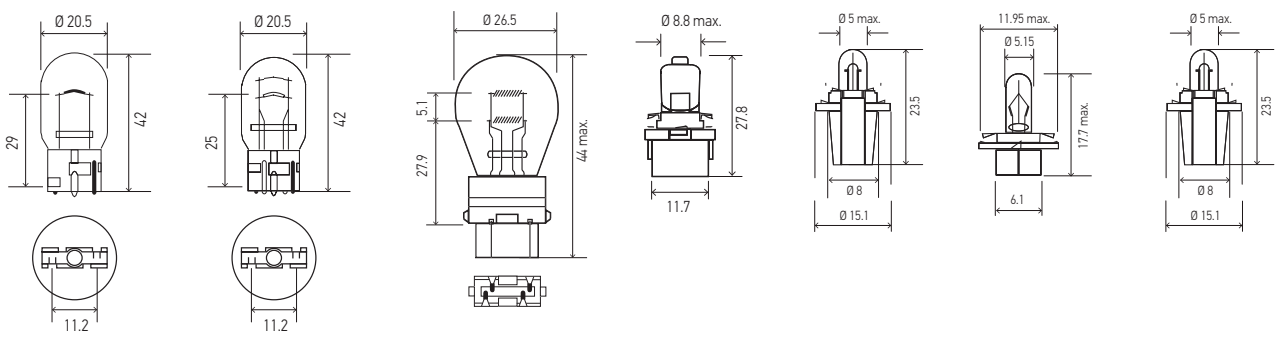


| BX8.4d | EBS R4 | W2x4.6d | 6411 LED | 6418 LED | 921 LED |
|--------|--------|---------|----------|----------|---------|
|--------|--------|---------|----------|----------|---------|

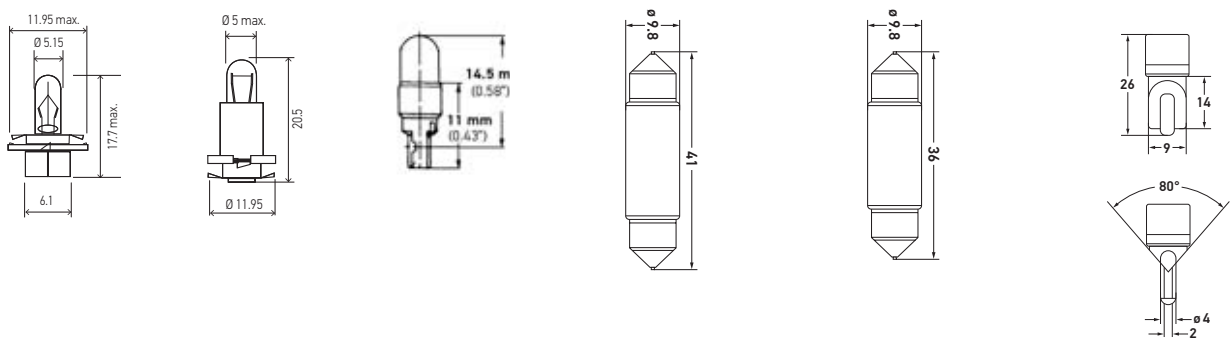


D1S




D2R




D2S



D3S

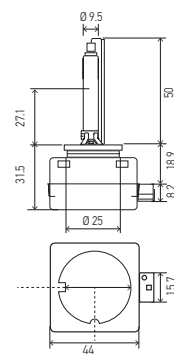

D4S





BUSINESS.



SIMPLIFIED.

EVERYTHING WE DO REVOLVES AROUND OUR CUSTOMERS

In order to ensure that business runs smoothly, HELLA supports wholesalers as your daily business is already complicated enough. That's why we see it as our job to make this as simple as possible for you.

For the aftermarket, we offer outstanding availability of goods using sophisticated logistics and first-class data management as well as targeted sales support. This speeds up and simplifies the wholesale business – for greater efficiency.

We support workshops throughout the entire repair process. We search proactively for new solutions to help independent workshops successfully master the growing complexity of the different models so that customer cars can „hit the road“ that much faster. This is how we make your daily business run faster and more profitable.

OUR SUPPORT FOR YOU AND YOUR CUSTOMERS



HELLA PARTNERWORLD

www.hella.com/partnerworld



HELLA TECHWORLD

www.hella.com/techworld



HELLA Automotive Sales, Inc.

201 Kelly Drive
Peachtree City, GA, 30269
Tel.: +1 (877) 224-3552
Fax: +1 (770) 631-7574
www.hella.com/bulbs
www.myhellalights.com

HELLAMEX, S.A. de C.V.

Carretera México Querétaro Km 30,
Bodega 2B
San Martín Obispo, Cuautitlán Izcalli,
Edo. de México. C.P. 54763
Tel. Ventas: +52 (55) 5321-1380 / 1001
Servicio Técnico: 01 800 221-0471
hellamex@hella.com
www.hellamex.com

HELLA do Brasil Automotive Ltda.

Rua Bom Pastor, 2224 - 15º andar
São Paulo, SP
04203-002 Brasil
Telefone: +55 (11) 2627-7800
info.brasil@hella.com
www.hella-brasil.com

© HELLA KGaA Hueck & Co. Lippstadt
999.142-993 11.2024
Printed in USA