

Volkswagen different models - The oval connector unlocks | HELLA

Volkswagen

Vehicles from the Volkswagen Group

The oval connector unlocks.

Caution with plug connectors.

Note on separating/unlocking the above different oval connectors on vehicles from the Volkswagen Group (see figures 1 + 2) 14-pin and 10-pin.

Under no circumstances must unsuitable tools, such as a screwdriver (figure 3), be used to unlock or loosen the lock.

Note that the connector must first be pressed on (e.g. on the headlight). In doing so the connector slackens a little as the surrounding rubber seal can be compressed slightly in the plug. When the connector is kept under slight pressure, the "unlocking button" (Figure 4) on the male connector housing can now be pressed and the connector can be removed (e.g. from the headlight).

You must handle it properly even in confined spaces.

This prevents the plug connection from being damaged and working loose during further operation.



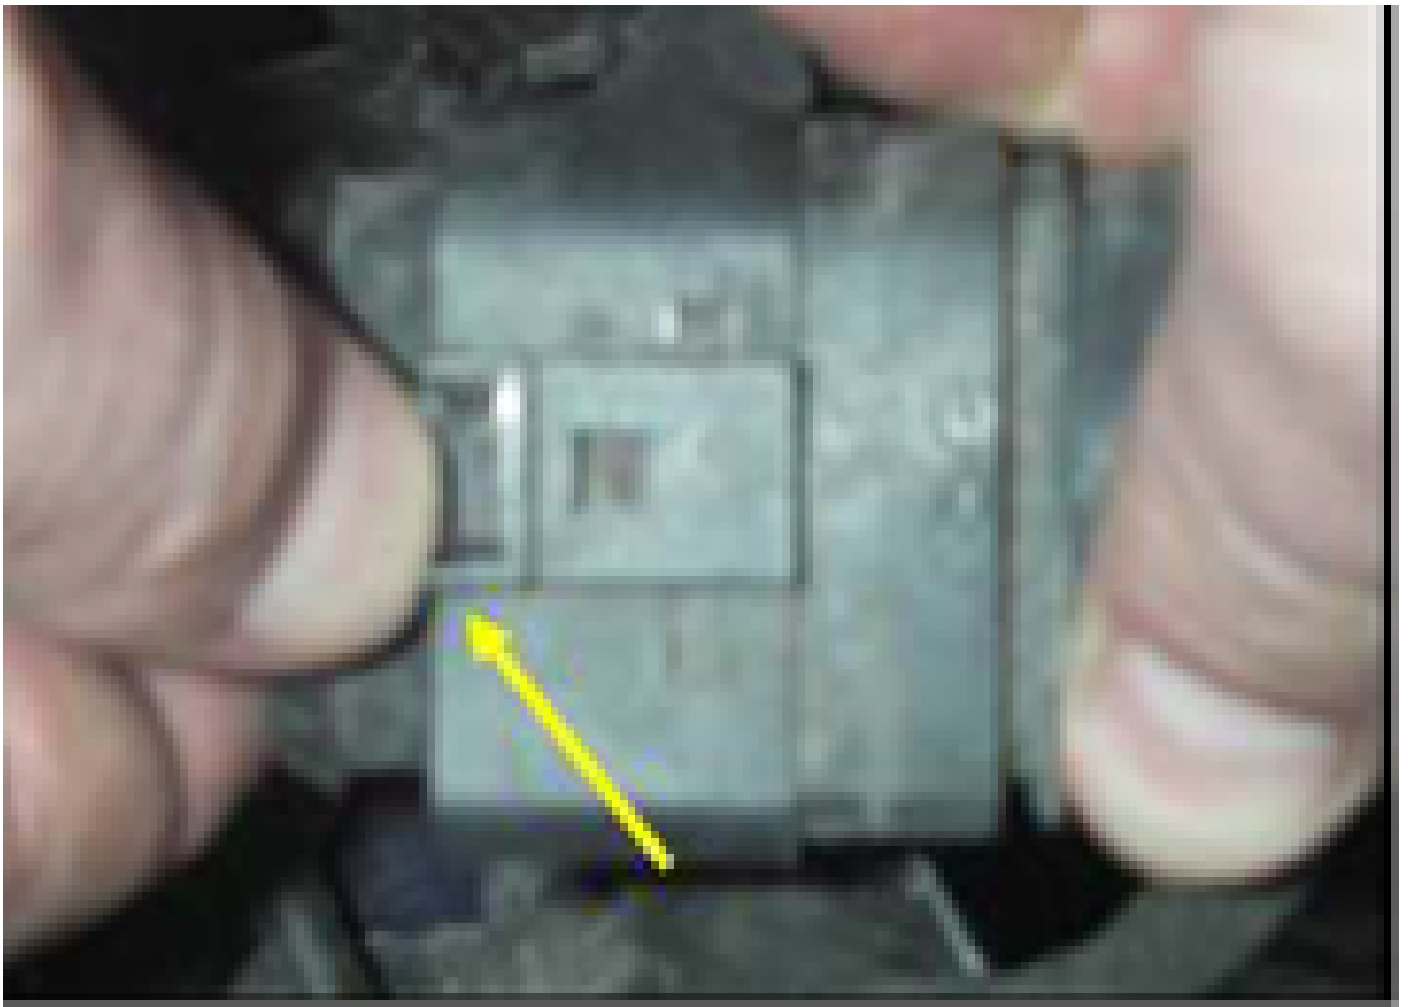


Figure 3 Figure 4



Figure 1.: 14-pin connector



Figure 2.: 10-pin connector

ⓘ Important safety note

The following technical information and tips for practical use have been set up by HELLA in order to offer professional support to automotive workshops in their daily work. The information available here on this website is only to be used by appropriately trained specialist staff.

The reprinting, distribution, reproduction, exploitation in any form and disclosure of the contents of this document, even in part, is prohibited without our express written approval and indication of the source. The schematic illustrations, figures and descriptions are for explanation and presentation of the document text and cannot be used as a basis for installation or design. All rights reserved.