



Message Implementation Documentation

Hella GLOBAL DELJIT

based on

DELJIT

Delivery just in time message

UN D.04B S3

- **Structure Chart**
- **Branching Diagram**
- **Segment Details**

Version: JAI 1.1
Variant: 2008
Issue date: 01.06.2009


Structure / Table of Contents

Counter	No	Tag	St	MaxOcc	Level	Content
	0000	1 UNA	C	1	0	Service string advice
	0000	2 UNB	M	1	0	Interchange header
	0010	3 UNH	M	1	0	Message header
	0020	4 BGM	M	1	0	Beginning of message
	0030	5 DTM	M	1	1	Message date
	0030	6 DTM	R	10	1	Other relevant dates or periods
┌	0080	SG2	O	1	1	Buyer
└	0090	7 NAD	M	1	1	Buyer's Name and Address
┌	0080	SG2	R	1	1	Seller Party
└	0090	8 NAD	R	1	1	Seller's Name and Address
┌	0080	SG2	R	1	1	Ship-to Party
└	0090	9 NAD	M	1	1	ShipTo's name and address
┌	0150	SG4	M	9999	1	Delivery Instruction Line (JIT delivery instruction including KANBAN)
└	0160	10 SEQ	M	1	1	Sequence details
┌	0250	SG7	R	9999	2	Product Item Line
└	0260	11 LIN	M	1	2	Line item
	0270	12 PIA	O	10	3	Additional product id
	0280	13 IMD	O	99	3	Item description
┌	0340	SG8	R	1	3	Delivery Forecast and other References
└	0350	14 RFF	M	1	3	Reference
┌	0400	SG10	D	99	3	Place of departure / Place of destination / other internal locations
└	0410	15 LOC	M	1	3	Place of departure / Place of destination / other internal locations
┌	0400	SG10	D	99	3	Place of departure / Place of destination / other internal locations
└	0410	16 LOC	M	1	3	Place of departure / Place of destination / other internal locations
┌	0450	SG12	R	999	3	Delivery quantity
└	0460	17 QTY	M	1	3	Quantity
	0560	18 UNT	M	1	0	Message trailer
	0000	19 UNZ	M	1	0	Interchange trailer

Counter = Counter of segment/group within the standard
 No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used


Branching Diagram of Used Segments/Groups

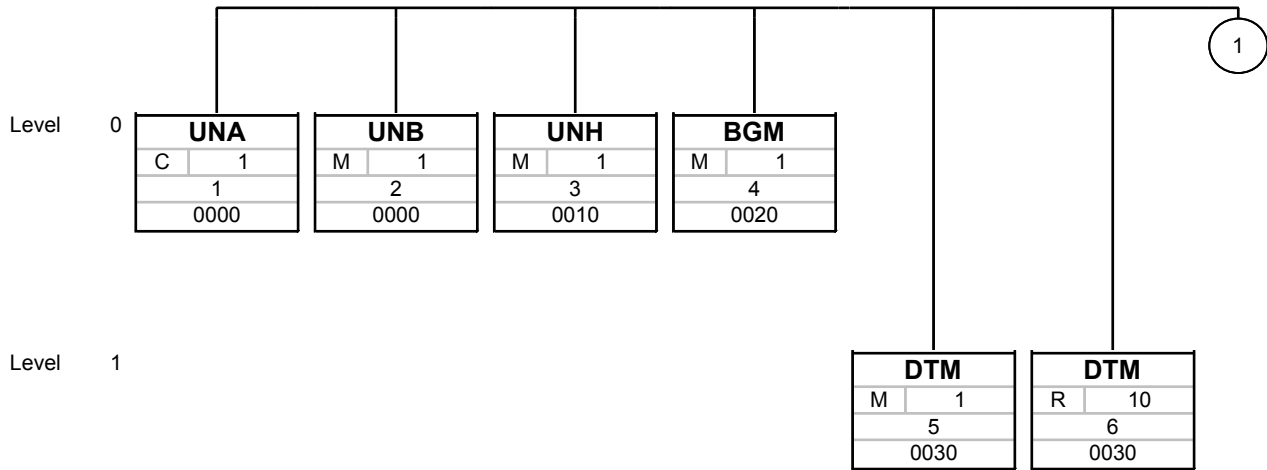

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
 St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
 MaxOcc = Maximum occurrence of the segment/group
 No = Consecutive segment number
 Counter = Counter of segment/group within the standard


Branching Diagram of Used Segments/Groups

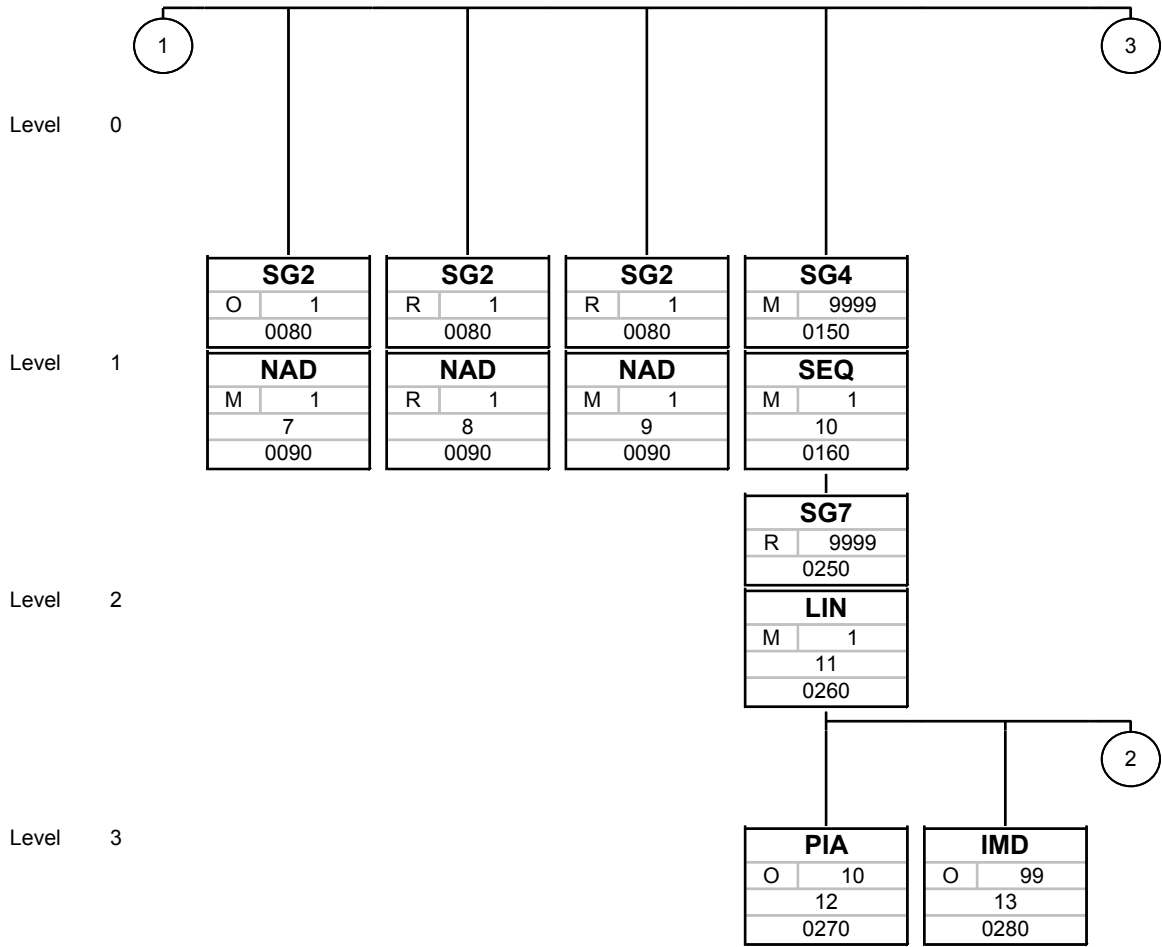

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
 St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
 MaxOcc = Maximum occurrence of the segment/group
 No = Consecutive segment number
 Counter = Counter of segment/group within the standard


Branching Diagram of Used Segments/Groups

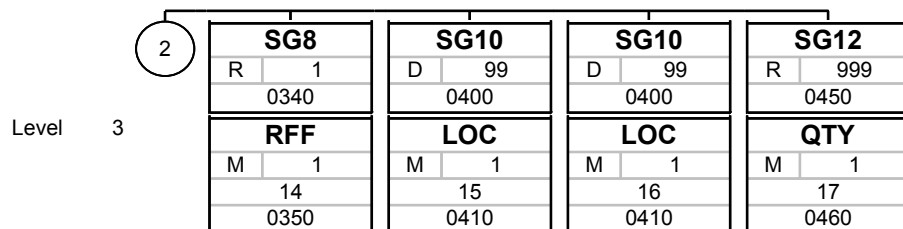

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
 St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
 MaxOcc = Maximum occurrence of the segment/group
 No = Consecutive segment number
 Counter = Counter of segment/group within the standard

Branching Diagram of Used Segments/Groups

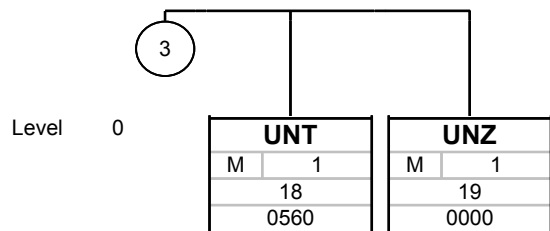

Tag
St MaxOcc
No
Counter

Tag = Segment/Group Tag
 St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
 MaxOcc = Maximum occurrence of the segment/group
 No = Consecutive segment number
 Counter = Counter of segment/group within the standard

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0000	1	UNA	C	1	0	Service string advice

		Standard	Implementation		
Tag	Name	St Format	St Format	Usage / Remark	
UNA					
UNA1	Component data element separator	M an1	M an1	default (A): colon	
UNA2	Data element separator	M an1	M an1	default (A): plus sign	
UNA3	Decimal notation	M an1	M an1	default (A): Comma or full stop	
UNA4	Release indicator	M an1	M an1	default (A): question mark; if not used, insert space character	
UNA5	Reserved for future use	M an1	M an1	insert space character	
UNA6	Segment terminator	M an1	M an1	default (A): Apostrophe	

Remark:

Example:

UNA: + . ? ' '

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0000	2	UNB	M	1	0	Interchange header

		Standard	Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNB				
S001	Syntax identifier	M	M	
0001	Syntax identifier	M a4	M a4	UNOA UN/ECE level A UNOB UN/ECE level B UNOC UN/ECE level C UNOX UN/ECE level X
0002	Syntax version number	M n1	M n1	1 Version 1 2 Version 2 3 Version 3
S002	Interchange sender	M	M	
0004	Sender identification	M an..35	M an..35	Unique ID of the sender in the data transmission network or system.
0007	Partner identification code qualifier	C an..4	C an..4	
0008	Address for reverse routing	C an..14	C an..14	Address of an application or internal system at sender's site to which answer messages should be routed.
S003	Interchange recipient	M	M	
0010	Recipient identification	M an..35	M an..35	Unique ID of the receiver in the data transmission network or system.
0007	Partner identification code qualifier	C an..4	C an..4	
0014	Routing address	C an..14	C an..14	Address of an application or internal system at recipient's site.
S004	Date/time of preparation	M	M	
0017	Date of preparation	M n6	M n6	Format YYMMDD
0019	Time of preparation	M n4	M n4	Format HHMM
0020	Interchange control reference	M an..14	M an..14	Unique ID of an interchange.
S005	Recipient's reference, password	C	C	
0022	Recipient's reference/password	M an..14	M an..14	
0025	Recipient's reference/password qualifier	C an2	C an2	
0026	Application reference	C an..14	C an..14	Identification of the application area assigned by the sender, to which the messages in the interchange relate e.g. the message identifier if all the messages in the interchange are of the same type. Notes: 1. Optionally message identification if the message interchange contains only one type of message.
0029	Processing priority code	C a1	C a1	Code determined by the sender requesting processing priority for the interchange. Notes: 1. Used if specified in IA.

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

		Standard	Implementation	
Tag	Name	St Format	St Format	Usage / Remark
0031	Acknowledgement request	C n1	C n1	Code determined by the sender for acknowledgement of the interchange. Notes: 1. Set = 1 if sender requests acknowledgement, i.e. UNB and UNZ segments received and identified.
0032	Communications agreement ID	C an..35	C an..35	Identification by name or code of the type of agreement under which the interchange takes place. Notes: 1. If used, to identify type of communication agreement controlling the interchange, e.g. Customs or ECE agreement. Code or name as specified in IA.
0035	Test indicator	C n1	O n1	1 Interchange is a test Only to be used, if the interchange is for test purposes. Omit this data element for valid interchanges.

Remark:

Example:

UNB+UNOC:3+00013000023HELLA-KG-EDIP+SUPPLIER+091001:0951+95369014'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0010	3	UNH	M	1	0	Message header

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	Unique message reference assigned by the sender. Notes: 1. Shall be identical in UNH and UNT.
S009	Message identifier	M	M	
0065	Message type	M an..6	M an..6	DELJIT Delivery just in time message
0052	Message version number	M an..3	M an..3	D Draft version/UN/EDIFACT Directory
0054	Message release number	M an..3	M an..3	04B Release 2004 - B
0051	Controlling agency	M an..2	M an..2	UN UN/CEFACT
0057	Association assigned code	C an..6	R an..6	Identification of the subset release, assigned by the responsible organisation (Odette resp. Joint Automotive Initiative Forum).

Remark:

Example:

UNH+2837663+DELJIT:D:04B:UN:GMI061'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0020	4	BGM	M	1	0	Beginning of message

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	Document/message name	C	R	
1001	Document name code	C an..3	R an..3	288 Kanban schedule Code specifying the type or subtype of the business document. Use UN/EDIFACT code list 1001 and JAI code list JAI001
C106	Document/message identification	C	R	
1004	Document identifier	C an..35	R an..35	Kanban / Summarized JIT-Call No.

Remark:

Example:

BGM+288+7500000001'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0030	5	DTM	M	1	1	Message date

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	137 Document issue date time
2380	Date or time or period text	C an..35	R an..35	Date, on which a document or business signal was issued.
2379	Date or time or period format code	C an..3	R an..3	102 CCYYMMDD

Remark:

Example:

DTM+137:20091001:102'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0030	6	DTM	R	10	1	Other relevant dates or periods

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	Date/time/period	M	M	
2005	Date or time or period function code qualifier	M an..3	M an..3	2 Delivery date/time, requested
2380	Date or time or period text	C an..35	R an..35	Date / time as qualified in DE 2005
2379	Date or time or period format code	C an..3	R an..3	203 CCYYMMDDHHMM

Remark:

Example:

DTM+2:200910010830:203'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG2	O	1	1	Buyer
0090	7	NAD	M	1	1	Buyer's Name and Address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	BY Buyer BY is the recommended code to use. In the US Codes MI, SI, or OB can be used as an alternate (to be used instead of BY). Code giving specific meaning to a party.
C082	Party identification details	C	R	
3039	Party identifier	M an..35	M an..35	Unique identification of a party by an ID.
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	R an..3	91 Assigned by seller or seller's agent Code specifying the agency responsible for a code list.

Remark:

Party to whom merchandise and/or service is sold.

Example:

NAD+BY+123456: :91'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG2	R	1	1	Seller Party
0090	8	NAD	R	1	1	Seller's Name and Address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	SE Seller In the US, either code is accepted. In the US, many companies use SU for supplier. SE for seller is often thought of as the party responsible for the financial obligations (of the buyer). Code giving specific meaning to a party.
C082	Party identification details	C	O	
3039	Party identifier	M an..35	M an..35	Unique identification of a party by an ID.
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	R an..3	92 Assigned by buyer or buyer's agent Code specifying the agency responsible for a code list.

Remark:

Party selling merchandise to a buyer.

Seller: The party who has liability to fulfill the contract. It is often used in the sense of seller and supplier and ship-from.

In Europe and Japan seller is preferred to identify the selling and supplying party. Supplier is only included when the party actually differs from the seller.

Example:

NAD+SE+8000001:::92'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0080		SG2	R	1	1	Ship-to Party
0090	9	NAD	M	1	1	ShipTo's name and address

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party function code qualifier	M an..3	M an..3	ST Ship to Code giving specific meaning to a party.
C082	Party identification details	C	R	
3039	Party identifier	M an..35	M an..35	Unique identification of a party by an ID.
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	R an..3	92 Assigned by buyer or buyer's agent Code specifying the agency responsible for a code list.

Remark:

The party to which goods are to be shipped (consigned).
The Ship To is used in the header when the entire contents of the message is for the same Ship To party.

Example:

NAD+ST+1000:::92'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
Counter = Counter of segment/group within the standard

St = Status
EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent,
A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0150		SG4	M	9999	1	Delivery Instruction Line (JIT delivery instruction including KANBAN)
<p>The message must include 1..n segment groups 4. Depending on the business process this segment group (and it's repetitions) is either of the JIT delivery instruction including KANBAN type (exclusive) or of the production synchronized delivery instruction type (sequenced delivery instruction)</p>						
0160	10	SEQ	M	1	1	Sequence details

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
SEQ				
1229	Action request/notification description code	C an..3	D an..3	<p style="text-align: center;">40 Agreed</p> <p>For requirements based delivery instruction and KANBAN SEQ is just a trigger. Code 40 is used. Code specifying the action to be taken or already taken.</p>

Remark:

Example:

SEQ+40'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0250		SG7	R	9999	2	Product Item Line
0260	11	LIN	M	1	2	Line item

		Standard	Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LIN				
1082	Line item identifier	C an..6	R an..6	Kanban/Sequenced JIT-Call position
1229	Action request/notification description code	C an..3	N	Code specifying the action to be taken or already taken. Not used
C212	Item number identification	C	R	
7140	Item identifier	C an..35	R an..35	Information directly relating to the identification of an article by the buyer's identification system. Note: The term article is synonym with the term item. Since in Odette and in the global joint automotive projects the term article has been used, this naming convention has been continued.
7143	Item type identification code	C an..3	R an..3	IN Buyer's item number

Remark:

Example:

LIN+0010++471.108-15:IN'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0250		SG7	R	9999	2	Product Item Line
0270	12	PIA	O	10	3	Additional product id

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PIA				
4347	Product identifier code qualifier	M an..3	M an..3	1 Additional identification Code qualifying the product identifier.
C212	Item number identification	M	R	
7140	Item identifier	C an..35	R an..35	Information directly relating to the identification of an item by the seller's identification system. Note: The term article is synonym with the term item. Since in Odette and in the global joint automotive projects the term article has been used, this naming convention has been continued. Sellers Article ID is usually transmitted with the qualifier 'SA' in DE 7143. SA means Suppliers Item Number, but in the messages is only a 'Seller' included, so that one can assume supplier and seller are used as synonyms. However, in the ORDERS message there is a distinction between supplier's item ID and vendor's / seller's item ID. Consequently, the seller's item ID has to be qualified there with VP instead the usual SA. If there is actually no difference between seller and supplier, the consistent use of SA is recommended. Other ID to identify the article according to qualifier value in DE 7143.
7143	Item type identification code	C an..3	R an..3	SA Supplier's article number

Remark:

Example:

PIA+1+386124:SA'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0250		SG7	R	9999	2	Product Item Line
0280	13	IMD	O	99	3	Item description

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
IMD				
7077	Description format code	C an..3	N	Code specifying the format of a description. Not used
C272	Item characteristic	C	N	
7081	Item characteristic code	C an..3	N	Not used
C273	Item description	C	R	
7009	Item description code	C an..17	N	Not used
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	N	Not used
7008	Item description	C an..256	R an..256	The short name or description of an article or service in plain text. For Japanese business environment up to 198 lines of text may be necessary.

Remark:

Example:

IMD+++:::Item'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0340		SG8	R	1	3	Delivery Forecast and other References
0350	14	RFF	M	1	3	Reference

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	Reference	M	M	
1153	Reference code qualifier	M an..3	M an..3	ON Order document identifier, buyer assigned
1154	Reference identifier	C an..70	R an..70	Hella Order Number

Remark:

Example:

RFF+ON:5500000001'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0400		SG10	D	99	3	Place of departure / Place of destination / other internal locations
0410	15	LOC	M	1	3	Place of departure / Place of destination / other internal locations

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	11 Place of discharge Code specifying a type of location.
C517	Location identification	C	R	
3225	Location name code	C an..35	R an..35	Identifier / code specifying the name of a location.
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	R an..3	Code specifying the agency responsible for a code list. 92 Assigned by buyer or buyer's agent

Remark:

Example:

LOC+11+:1002:92'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0400		SG10	D	99	3	Place of departure / Place of destination / other internal locations
0410	16	LOC	M	1	3	Place of departure / Place of destination / other internal locations

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Location function code qualifier	M an..3	M an..3	159 Additional internal destination Code specifying a type of location.
C517	Location identification	C	R	
3225	Location name code	C an..35	R an..35	Identifier / code specifying the name of a location.
1131	Code list identification code	C an..17	N	Not used
3055	Code list responsible agency code	C an..3	R an..3	Code specifying the agency responsible for a code list. 92 Assigned by buyer or buyer's agent

Remark:

Example:

LOC+159+PVB:::92'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
	0450	SG12	R	999	3	Delivery quantity
	0460	17 QTY	M	1	3	Quantity

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	Quantity details	M	M	
6063	Quantity type code qualifier	M an..3	M an..3	<p>113 Quantity to be delivered</p> <p>113 is used to indicate the quantity to be delivered. This is the recommended qualifier (instead of using 131). However, in North America sometimes a process is used which requires the seller to calculate the 'to be delivered' quantity as the difference between cumulative quantity received and the (target) cumulative quantity.</p>
6060	Quantity	M an..35	M an..35	Quantity, scheduled or instructed for delivery
6411	Measurement unit code	C an..8	R an..8	Code specifying the unit of measurement, use UN/ECE Recommendation 20, Common code.

Remark:

Example:

QTY+113:500:C62'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0560	18	UNT	M	1	0	Message trailer

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNT				
0074	Number of segments in the message	M n..6	M n..6	Control value: number of segments
0062	Message reference number	M an..14	M an..14	Control value: message reference number

Remark:

Example:

UNT+16+051020053'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used

Segments

Counter	No	Tag	St	MaxOcc	Level	Name
0000	19	UNZ	M	1	0	Interchange trailer

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNZ				
0036	Interchange control count	M n..6	M n..6	The count either of the number of messages or, if used, of the number of functional groups in an interchange. One of these counts shall appear.
0020	Interchange control reference	M an..14	M an..14	Unique reference assigned by the sender to an interchange. Notes: 1. Shall be identical in UNB and UNZ.

Remark:

Example:

UNZ+1+95369014'

No = Consecutive segment number
 MaxOcc = Maximum occurrence of the segment/group
 Counter = Counter of segment/group within the standard

St = Status
 EDIFACT: M=Mandatory, C=Conditional
 User specific: R=Required, O=Optional, D=Dependent,
 A=Advised, N=Not used